





VIDALITE

DIAGRAM OF INSTALLATION STRUCTURE

SKU No.: CE1013091

Product Size: $\Phi 18 \frac{5}{8}'' \times H38''$

Light Source: B10 E12 bulb

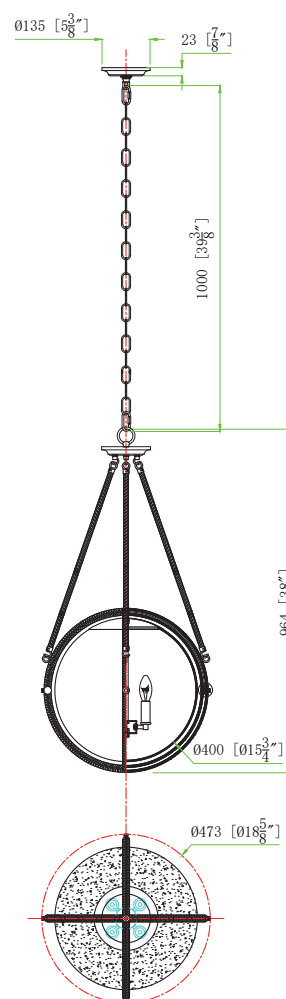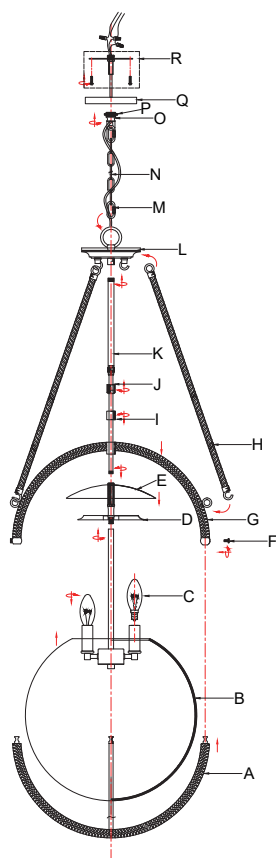

A: Bottom frame	B: Glass shade	C: B10 E12 bulb(Not Included)	D: Plate
E: Cap	F: Screws	G: Top frame	H: Decorative rods
I: Nut	J: Nut	K: Telescopic tube	L: Decorative canopy
M: Quick link	N: Chain	O: Collar loop	P: Threaded ring
Q: Canopy	R: Mounting hardware		

Installation Instruction

1. Turn off the power.
2. Screw recommended bulbs(C) (B10 E12 bulb type, not included) into sockets.
3. Tilt glass shade (B) to other side. Completely insert the plate (D) inside glass shade (B). Set glass shade (B) on top of plate(D).
4. Lower top frame (G) down over cap (E), screw by nut(I).
5. Connect bottom frame (A) and top frame(G) by screws (F).
6. Screw one end of telescopic tube(K) onto top frame (G) and the other end to the decorative canopy(L). Hook decorative rods (H) to the frame (G) and decorative canopy (L). Adjust the height of telescopic tube(K) by turning nut(J).
7. Determine desired hanging height of fixture. Cut chain (N) to length to achieve desired height.
8. Slip quick link(M) at end of chain (N) onto loop on top of decorative canopy (L).
9. Fasten mounting hardware(R) to junction box with machine screws.
10. Weave fixture wires through chain links, skipping every other chain link.
11. Slip threaded ring (P) down, position the threaded ring (P) and canopy(Q) over end of chain (N) with fixture wires.
12. Raise the fixture up to the ceiling and do the wire connection.
Place the canopy(Q) over the junction box and secure with threaded ring (P).
13. After finish the installation, turn on the power.