


ASSEMBLY INSTRUCTIONS

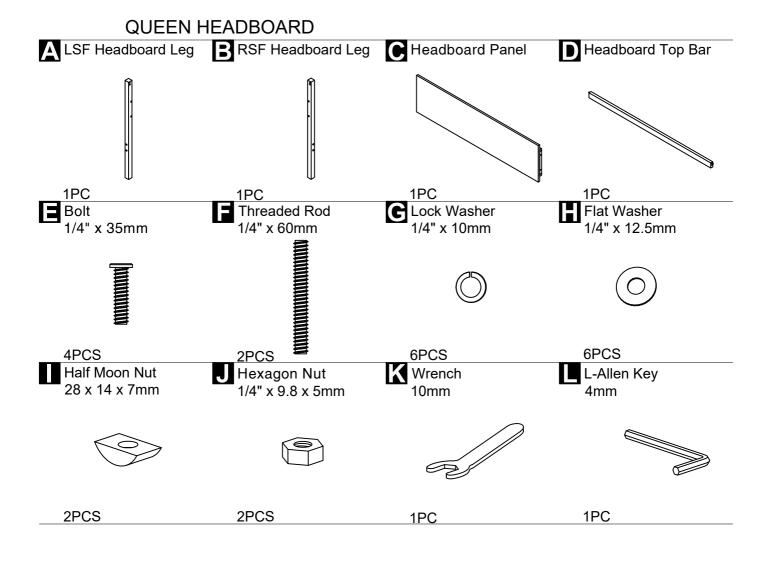




This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage. Attach RSF Headboard Leg (B) to Headboard Panel (C) using Bolt (E), Lock Washer (G) and Flat Washer (H) with L-Allen Key (L). Turn Threaded Rod (F) into RSF Headboard Leg (B). Then attach RSF Headboard Leg (B) to Headboard Top Bar (D) using Threaded Rod (F), Hexagon Nut (J), Lock Washer (G), Flat Washer (H) and Half Moon Nut (I) with Wrench (K).

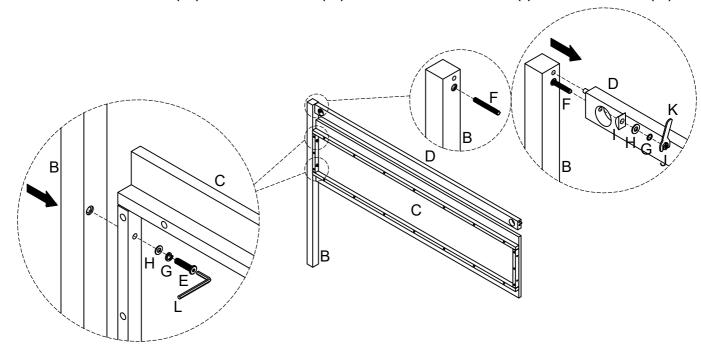


Attach LSF Headboard Leg (A) to Headboard Panel (C) using Bolt (E), Lock Washer (G) and Flat Washer (H) with L-Allen Key (L). Turn Threaded Rod (F) into LSF Headboard Leg (A). Then attach LSF Headboard Leg (A) to Headboard Top Bar (D) using Threaded Rod (F), Hexagon Nut (J), Lock Washer (G), Flat Washer (H) and Half Moon Nut (I) with Wrench (K).

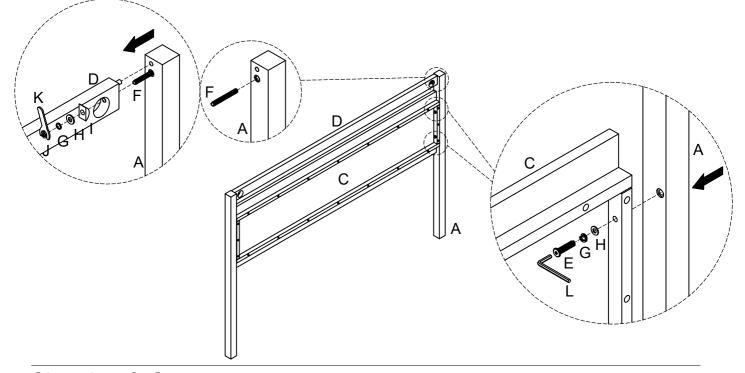


Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.


ASSEMBLY INSTRUCTIONS

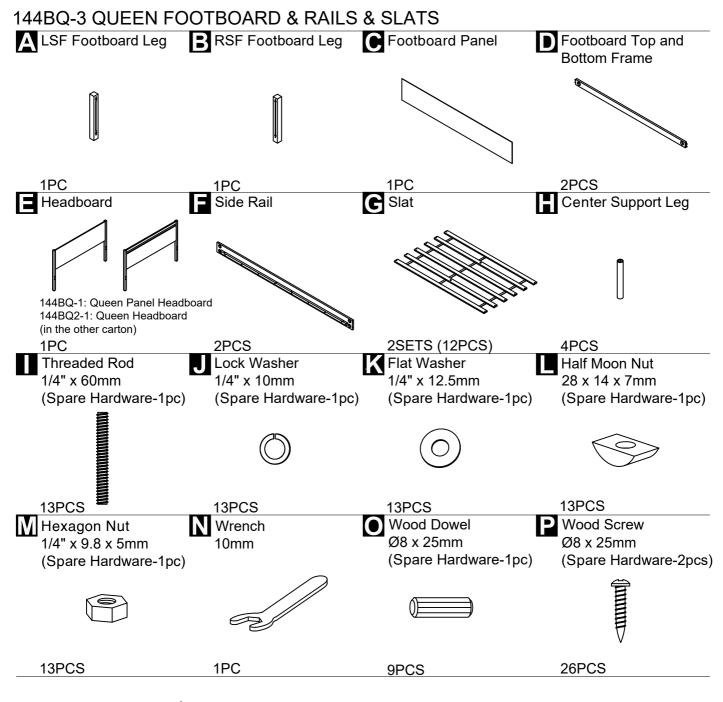




This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.



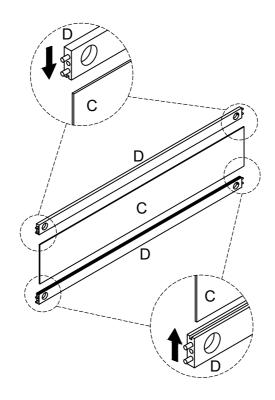


Turn Threaded Rod (I) into LSF & RSF Footboard Leg (A & B). Then attach LSF & RSF Footboard Leg (A & B) to Footboard Panel (C) and Footboard Top and Bottom Frame (D) using Threaded Rod (I), Hexagon Nut (M), Lock Washer (J), Flat Washer (K) and Half Moon Nut (L) with Wrench (N).

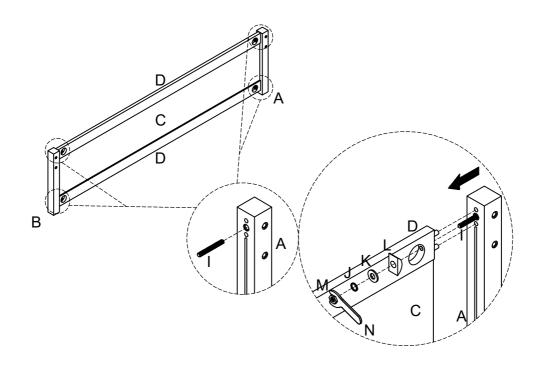


3

Turn Threaded Rod (I) into LSF & RSF Footboard Leg (A & B) and Headboard (E). Then attach LSF & RSF Footboard Leg (A & B) and Headboard (E) to Side Rail (F) using Threaded Rod (I), Hexagon Nut (M), Lock Washer (J), Flat Washer (K) and Half Moon Nut (L) with Wrench (N).

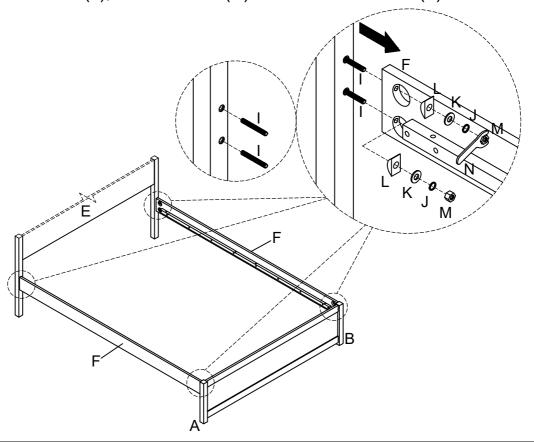


4

Turn Center Support Leg (H) into Slat (G).

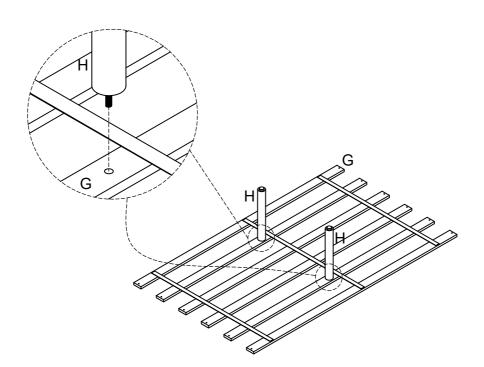



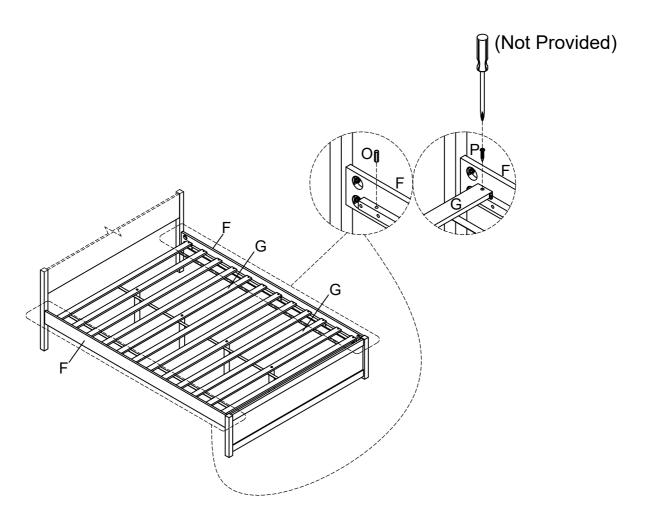

Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.