Assembly Instructions

Caution: You must read this before you proceed

Care & Maintenance



Not for commercial use. For residential use only.



 Furniture may scratch floors. We recommend using furniture pads to protect your floors.



• Do not put hot items directly on furniture surface.



• Do not clean furniture with harsh cleansers or polish.



Do not place furniture under direct sunlight.



Do not place furniture near heating or cooling vents.



 Do not write on furniture without a padded barrier to protect the surface.



• Do not place furniture outside . For indoor use only.



 Stains may be removed with mild soap solution and damp cloth.



Children should not climb or jump on the furniture.



 Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in carton for hardware packs and legs. Sets often ship in multiple boxes and may arrive a day or two apart.


BAR STOOL



		U	
Parts I	<u>_is</u> t		
Label	Picture	Description	QTY
А		Seat Cushion	1
В		Cross Ring	1
С	Ğ	Back	1
D		Leg	4
E		Ring	1
F		Ring	1
<u>Hardware</u>			
Label	Picture	Description	QTY
1	(a) (minimum)	Bolt (M6 x 30mm)	5
2		Bolt (M6 x 18 mm)	12
3		Washer (6×16×1.2mm)	16
4		Allen Wrench (5mm)	1
(5)	©	Spare Leveller	1
6	(i)	Bolt (M6x55mm)	5

Assembly Preparation

Before Beginning Assembly

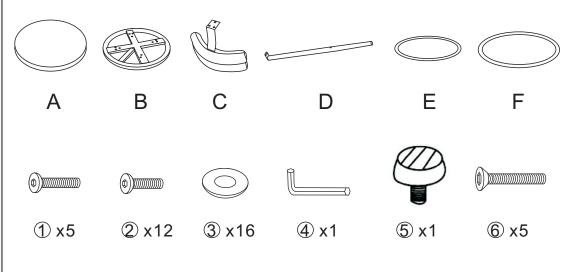



Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




Assemble on a clean non-marring surface (packing foam)-



Save all packaging until finished-


Assembly Steps

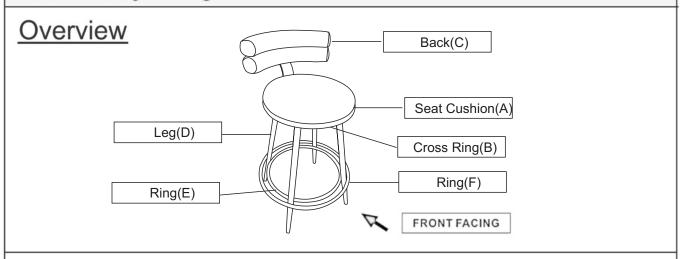

This Bar Stool has multiple parts and may require up to some 30 minutes to assemble. To give you an overview of the Dining Chair parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

Step1




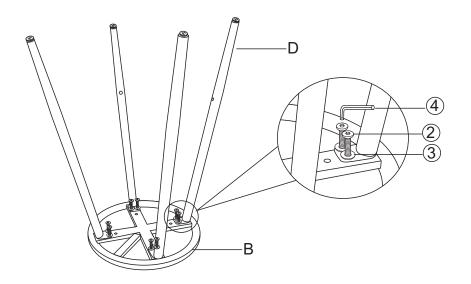

Attach the Leg(D) to the Cross Ring (B) using the Washer(\Im), Bolts(\Im) with Allen Wrench(\Im) as pictured above. Do not fully tighten the Bolts.

Step2






Attach Ring (E)and (F) to the Leg(D) using the Bolts (6) with the Allen Wrench (4).

Do not fully tighten the Bolts.


Step3






Place the Seat Cushion(A)face down on the edge of a clean,non-marring table top. Attach the Leg with Ring to the Cushion(A) using the Washer (③), Bolts(1) with the Allen Wrench(4) as pictured above. Fully tighten the Bolts.


Step4



Attach the Leg with Ring to the Back(C) using the Washer (③), Bolts (③) with the Allen Wrench(④) as pictured above. Fully tighten the Bolts.

Step5

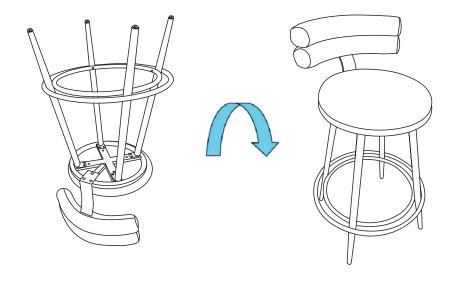




Stand the Chair up.

Place the chair on a LEVEL SURFACE to check for wobbles.

Adjust the levelers to ensure chair stability.

Step6



Your Chair is ready for use .

This chair can only be used on a flat, level surface.