

ASSEMBLY INSTRUCTIONS


1	x1	6	x1
2	x1		
3	x2		
4	x1		
5	x1		

ASSEMBLY INSTRUCTIONS


A	Ø6x26mm	x35	
B	Ø15x9mm	x35	
©	@ ⁰⁰⁰⁰⁷ Ø3.5x14mm	x12	
D		x4	
E		х4	
Œ		x4	
(G)		x2	
\oplus		х1	

Use the Cam Lock and Eccentric Wheel ECCENTRIC WHEEL


Tighten the bolt until the shoulder is aligned with the panel. Be sure not to tighten too much or too little.









The pre-inserted nut should align with the center of the cam lock when joining two panels. The cam lock should be inserted before the eccentric wheel.






Turn the cam lock clockwise to tighten.

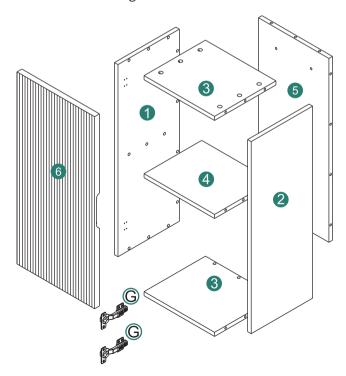


ASSEMBLY INSTRUCTIONS

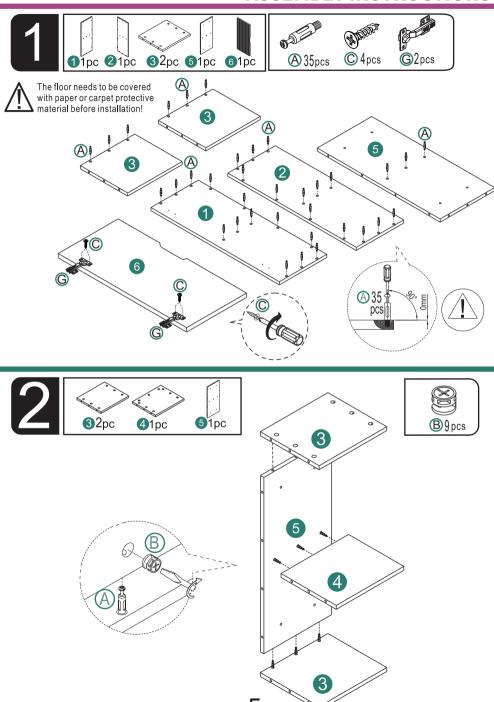








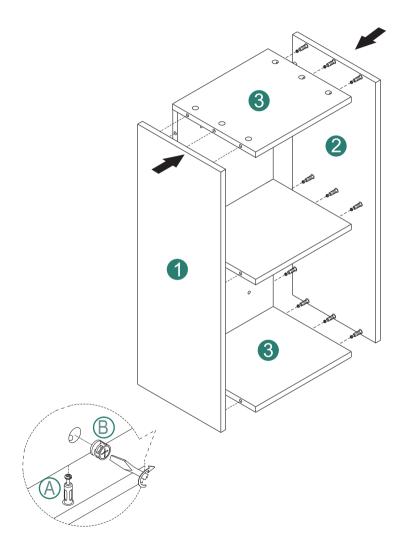








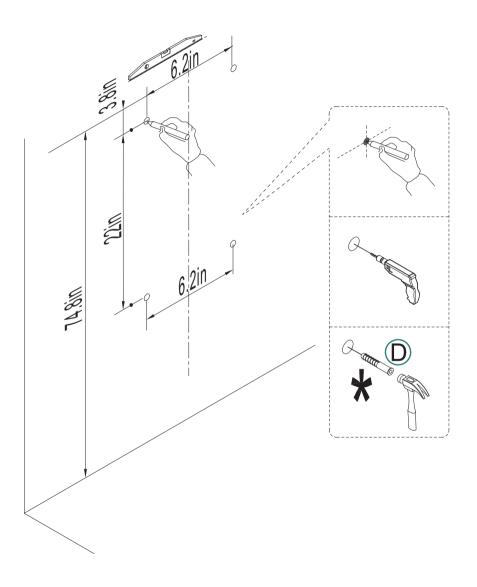





















8