

## Safety Precautions:

This safety note describes how to make your child enjoy this book happily and safely.

Products, please be patient to read the following safety precautions.

1. When charging, you must do it from an adult. Do not let the child charge himself.
- 2, must drive this car under the supervision of adults
3. This product must be assembled by adult adults before being assembled or used.
4. It is strictly forbidden to drive in dangerous places such as the swimming pool on the public street.
- 5, the car can not overload the maximum load capacity of 30 kg
6. This product is only suitable for children aged 37 months and above. Do not use children 3 years old and younger.
7. Note that some parts will be damaged due to improper driving.
8. It is strictly forbidden to change suddenly during driving. The forward switch function should change the switch function during stationary.
9. After the car is dirty, it can only be scrubbed with a clean cloth. Do not rinse with water to avoid damage to the components.
- 10, the charger is not a toy, please collect after charging
- 11, the product is a plastic product, please stay away from fire.
12. When the product is in use, the motor will generate sparks when it starts. Therefore, it is strictly prohibited to burn at the gas station. Use in areas such as explosive danger
13. Please pay special attention to let the child touch the wheel or the position near the wheel to avoid pinching and crushing. Do not let other children approach the car while in use.
14. The car is suitable for driving on a flat ground. Please try to avoid driving in silt or uneven terrain.
15. Do not play the children's packaging on the removed clothes to avoid accidental danger to children.
- 16, the product is for the child to make the guardian responsible for the month before the month to explain the contents of the instructions to guide the child correctly


Operational use

17. The seat belt attached to the car is only a toy that adds safety awareness to children.

Safety function of human vehicles


- 18, please guide children how to relax the accelerator pedal How to deal with the pedals and the car when the obstacles and how Stop the car.
19. Insert the battery correctly, pay attention to the positive and negative poles.
20. The battery can be recharged but not heated and thrown into the fire to avoid short circuit.
- 21, non-storage battery can not charge the battery can only be charged under the supervision of adults
23. If the battery is not used for a long time, please remove the battery to avoid leakage. If the battery is dead, it should be taken out of the vehicle body.
24. The power terminals must not be short-circuited. Please check the product and the charger used regularly to see if the wires, plugs, casings and other components are Damaged, should be discontinued when damage is found, until the repair is in good condition.

## Children's electric motorcycle Installation instructions

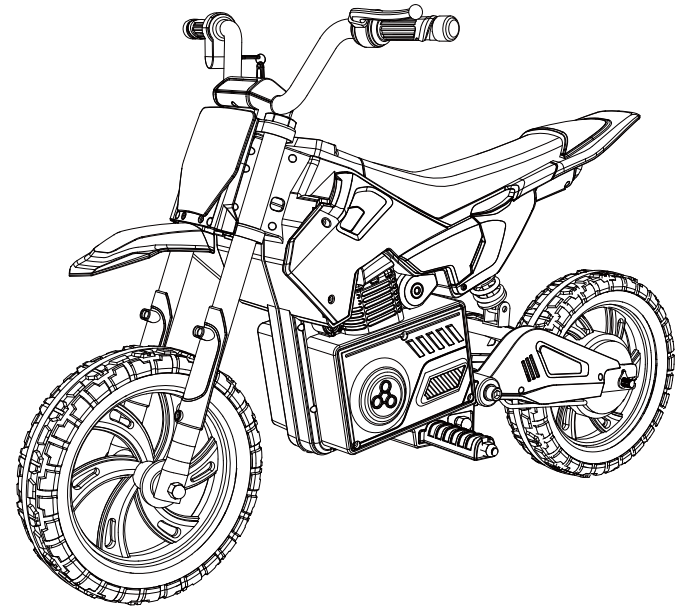


If you have any question, please contact at L843485741@outlook.com directly.

## Parts drawing

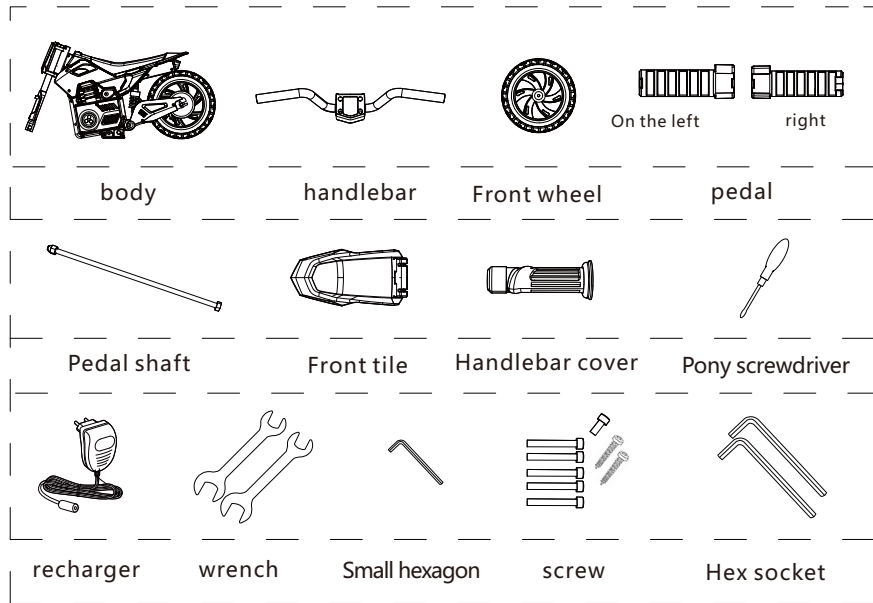


## Install shock absorption




Remove the cable tie tied to the rear wheel, align the shock absorption with the hole, insert it with one long screw and one short screw, and tighten it with two Allen wrenches

## Mounting foot




Install the foot left and right in the corresponding position, the shaft aligns with the foot through the left side, and screw on the nut

## Handlebar mounting




The handlebars are aligned with the body, fixed with four screws, and tightened with the hexagon, so that the left side of the handlebar can be threaded through the start brake and handle cover, the right side of the handlebar can be threaded into the turn handle, and the hand brake and turn handle can be fixed with the hexagon

## Mounting front tile

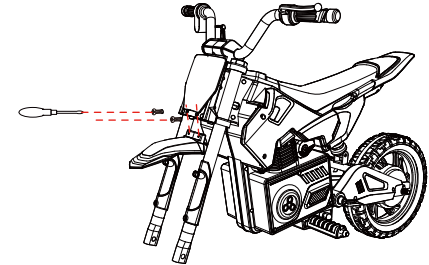

Remove the fixing screws first, then align the front tile with the hole on the car body, and screw on two screws


## Front wheel mounting

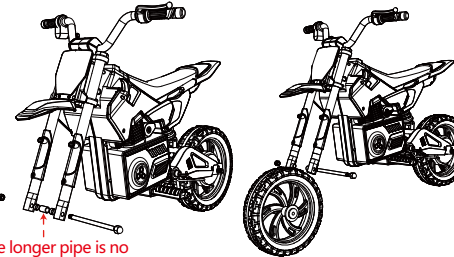

The longer pipe is no longer needed

Put the front wheel on the designated position on both sides of a short shaft tube and insert the front shaft in turn, and tighten the nuts

## Power connection

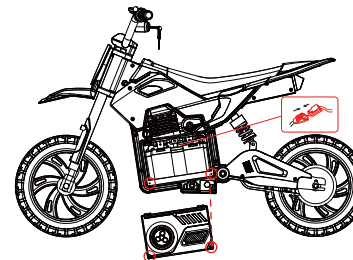

Remove the two screws first, remove the shell for use, insert the red terminal, and then install the shell, screw on