



ASSEMBLY INSTRUCTION FOR S5774 S5775 S5776 S5777 S5778 LOVESEAT




Components List

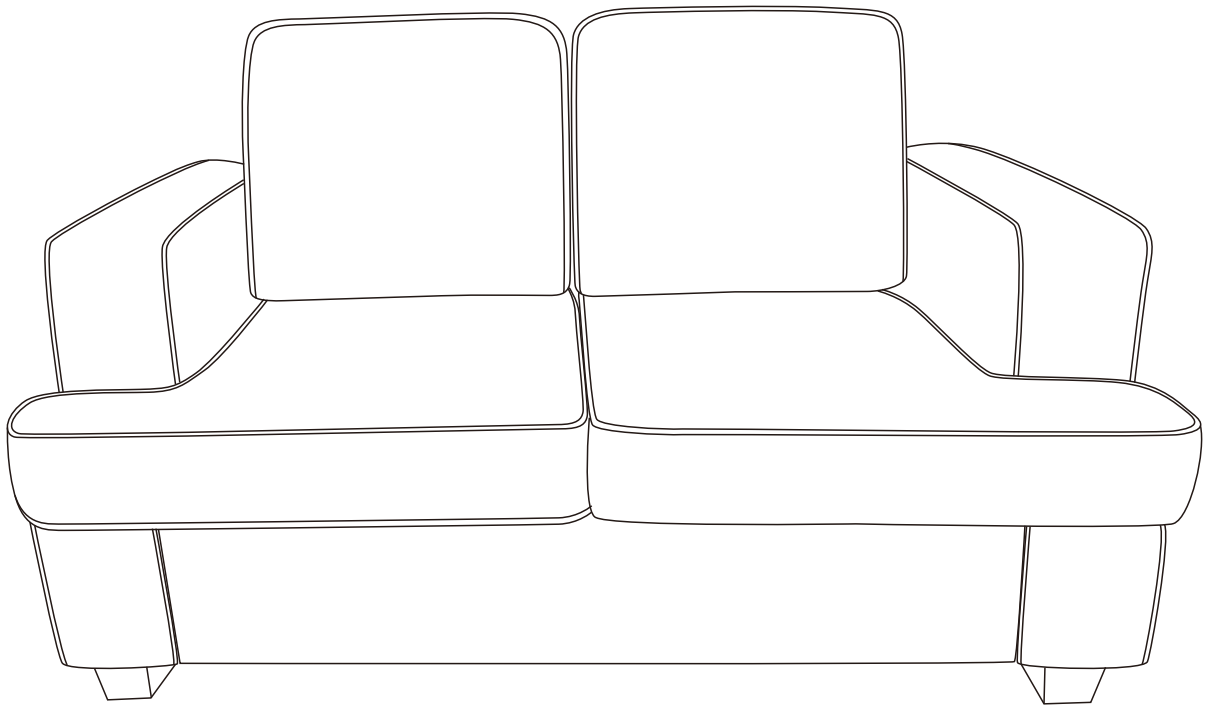

Gx1
Seat Frame Board




H-Lx1
Left arm

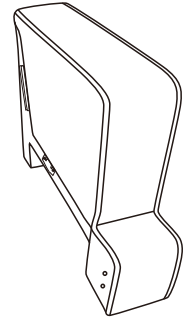


H-Rx1
Right arm




ix1
Front plate

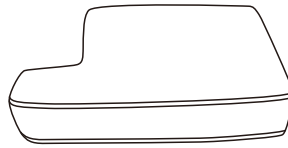


J-Lx1
Left Seat cushion

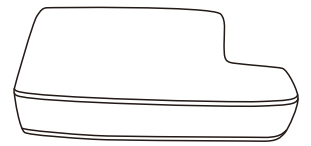

J-Rx1
Right Seat cushion



Kx2
Back cushion

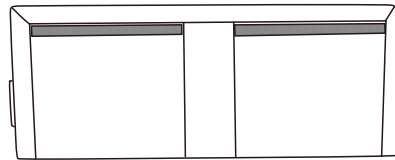

Lx1
Sofa Back

Hardware List

A M8x20mm



Bolt X4

B M8x80mm



Bolt X4

C



Washer X4

D



Allen key X1

E





Leg X4

F







Center Legx1

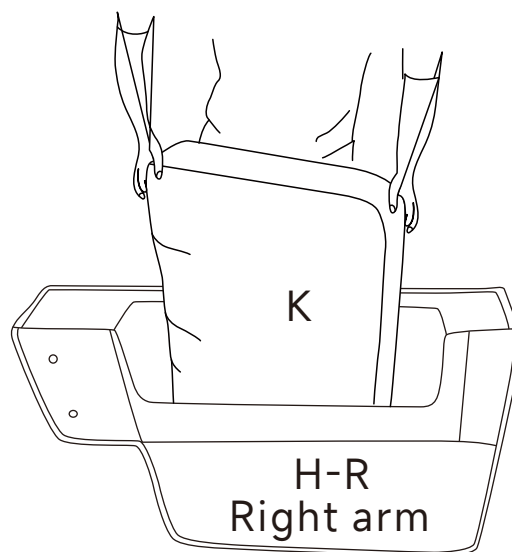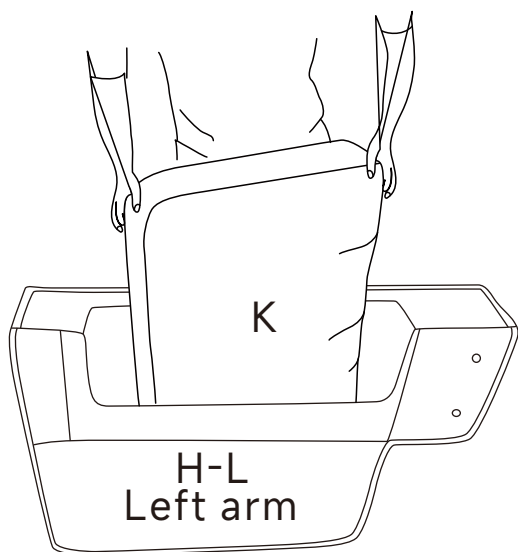STEP 1: Please help carefully take 2 pieces of Back Cushions (K) out from the Left arm (H-L) and Right arm (H-R).

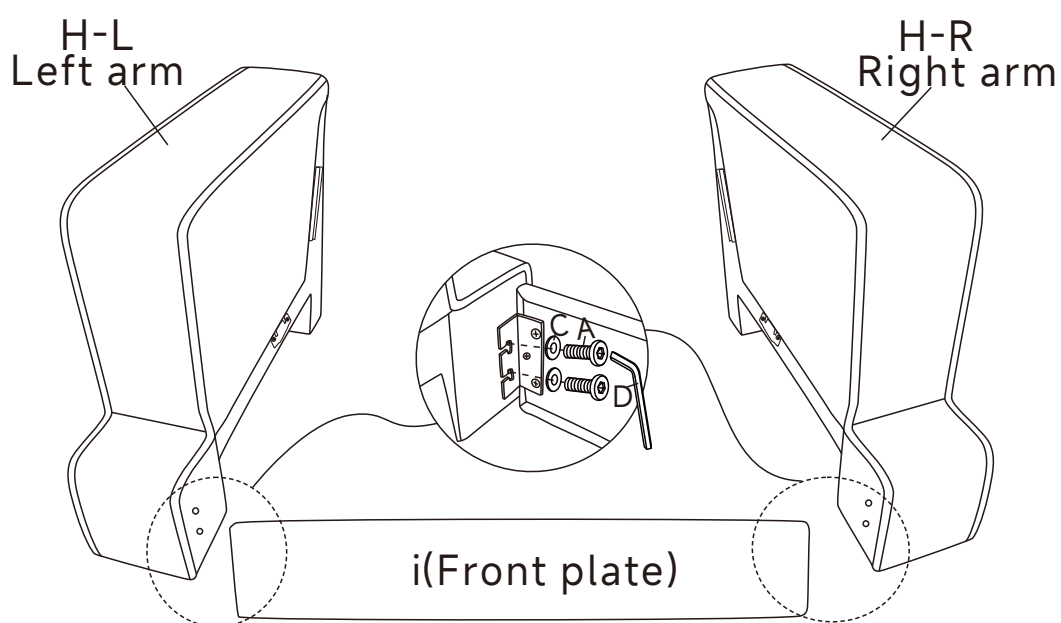


STEP 2: Use Allen key (D) to tighten 4 pcs of Bolt (A) and Washer (C), secure the Front plate (i) and Left Arm (H-L) and Right Arm (H-R).




| | |
|--|-----|
|  | Ax4 |
|  | Cx4 |
|  | Dx1 |

STEP 3: Tighten the piece of Center Leg(F) to the bottom of Seat Frame Board (G) as shown.

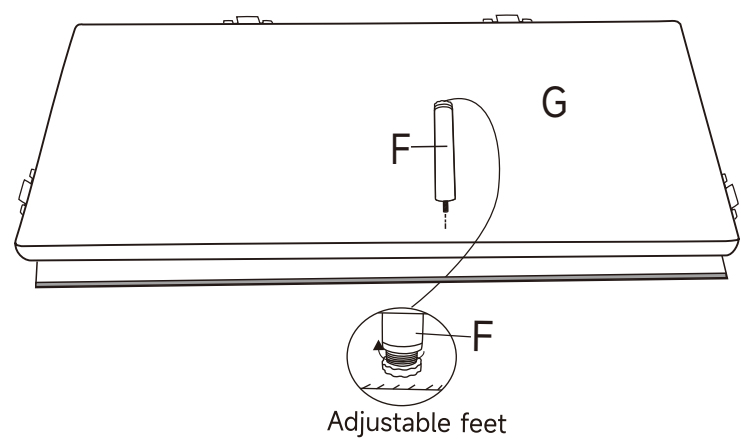


STEP 4 : Attach 4 pieces of Legs (E) to the bottom of Sofa by using 4 pieces of Bolts (B) as shown with Figure and Use Allen Key (D) to tighten all Bolts (B).

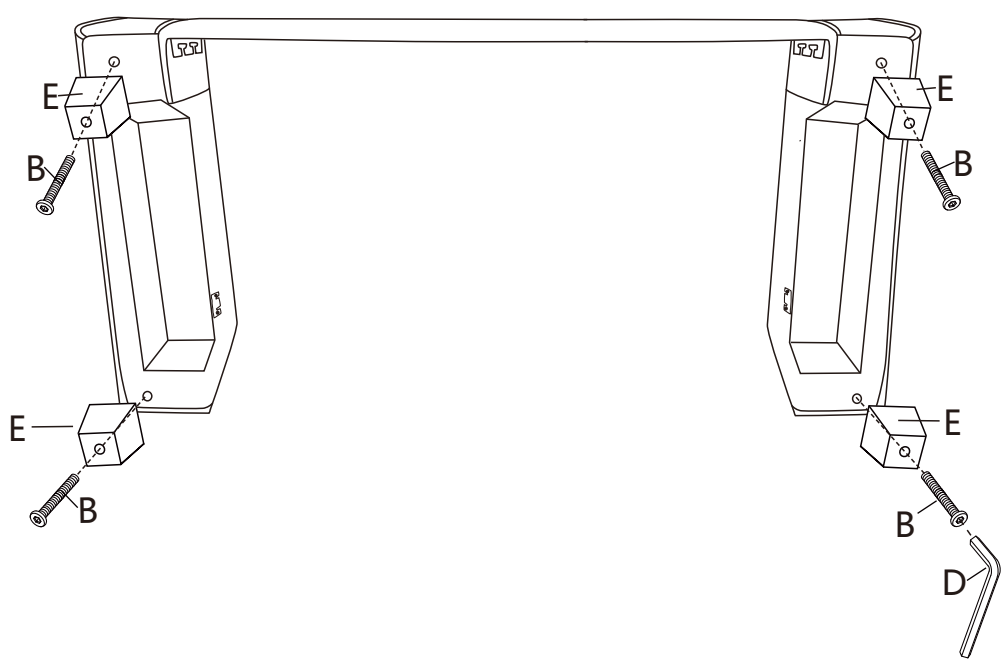


| | |
|--|-----|
| | Bx4 |
| | Dx1 |
| | Ex1 |
| | Fx1 |


STEP 5: Put the Seat Frame Board (G) horizontally between Left Arm (H-L) and Right Arm (H-R), then fix the Seat Frame Board (G) and front plate with mountain shaped inserts as shown.

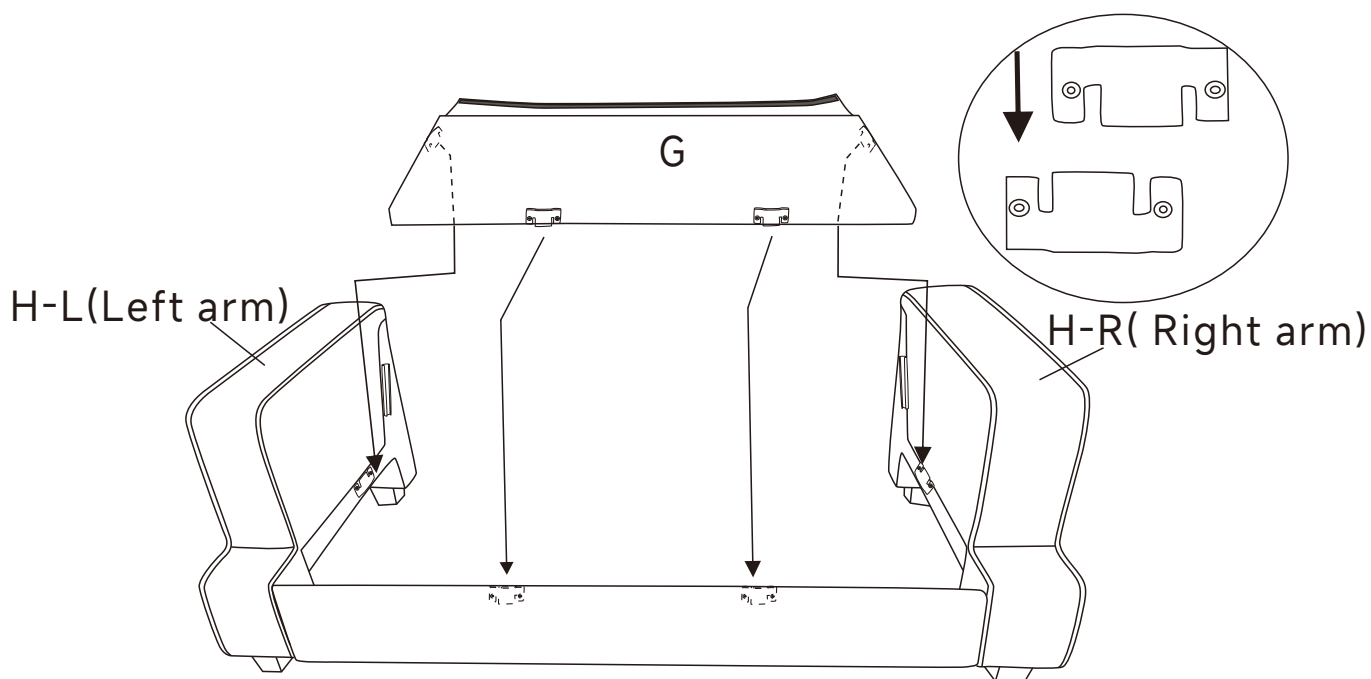


STEP 6: Insert Sofa Back (L) to Left Arm (H-L) and Right Arm (H-R) by using the pre-installed Clips on Left Arm (H-L), Right Arm (H-R) and Sofa Back (L) to lock each other as shown. Then stick the Seat Frame Board (G) Velcro on the Sofa Back (L) .

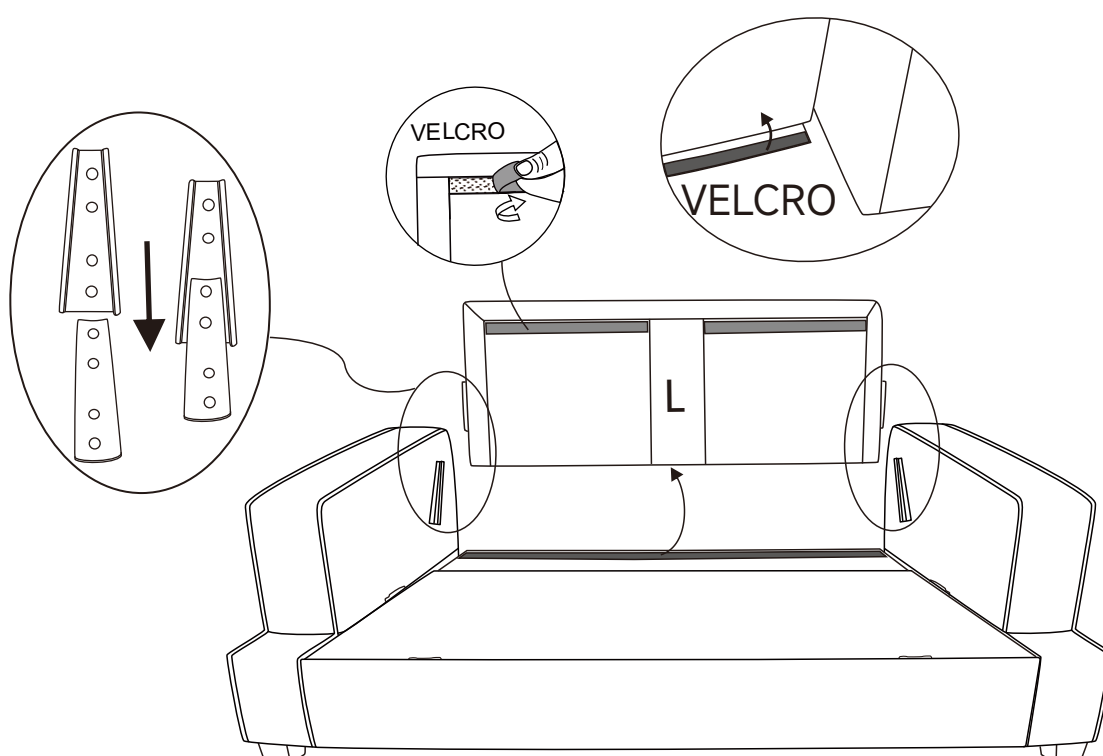

STEP 7: Carefully put 1 piece of Left seat cushion (J-L) and Right seat cushion (J-R) on the Seat Frame Board (G).

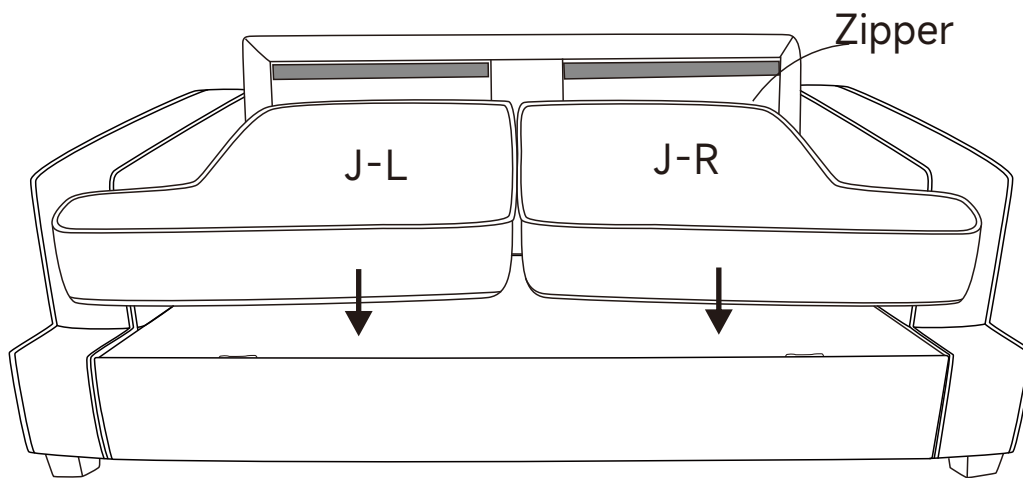

STEP 8: Remove the protective strip of the Velcro on the Sofa back (L), then Carefully put 2 pieces of Back cushions (K) to the assembled Sofa as shown.

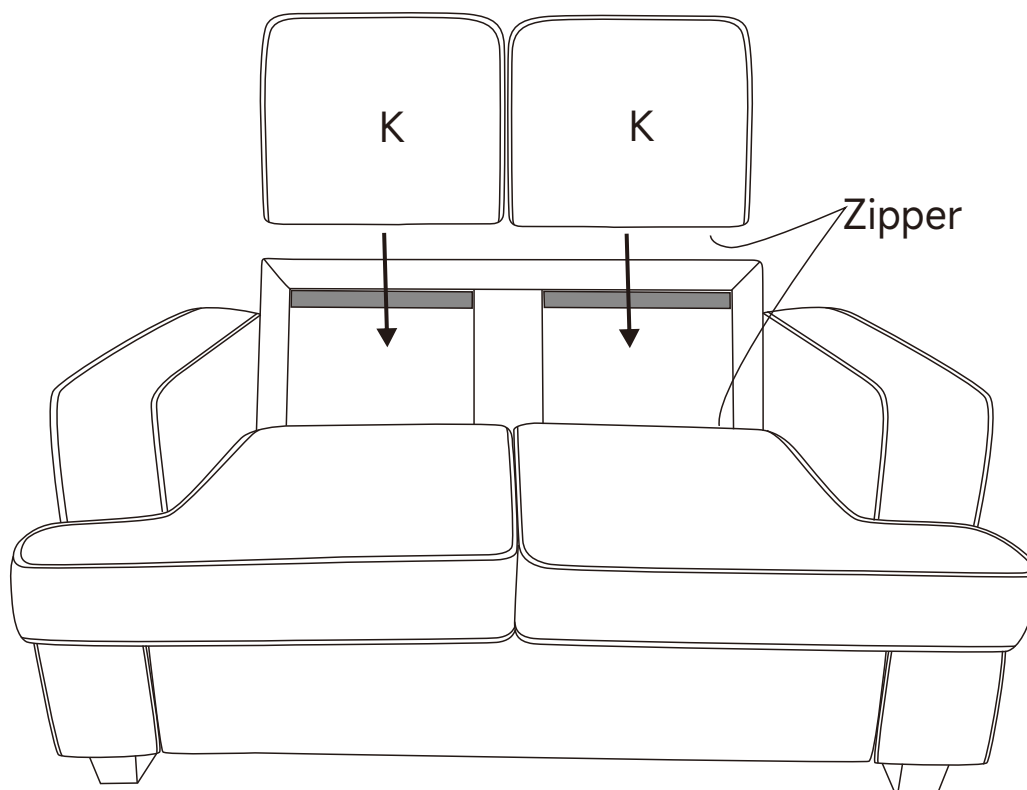

STEP 9: Remove the protective strip of the Velcro on the back of sofa, then tight the Velcro to the armrest.

