


ASSEMBLY INSTRUCTIONS

Note: The diagram illustrates the installation of your new luminary. This is a representative drawing and is not intended to match the style of your luminary.



CAUTION: TURN OFF ELECTRICITY BEFORE PROCEEDING! Recommended contact a qualified electrician to install this lamp! **PREPARE THE FIXTURE & OUTLET BOX. Refer to as below diagram:**

1. Carefully layout all parts in a line on a smooth surface.
2. Connect the bare or green grounding wire of the supply to the bare copper wire of the fixture
3. Connect the white supply wire to the common lead wire of the fixture. The common lead wire is identified in fixtures as the wire with a ribbed edge.
4. Connect the black supply wire to the power lead wire of the fixture. The power lead wire is indentified in fixture as the wire without a ribbed edge(smooth).
5. Place the crossbar to ceiling and screw it by the screws.
6. Place the ceiling canopy to mounting bracket and screw it by the canopy locking nut. **Refer to see diagram:**
7. Place the one end of chains to base bottom and screw it with screws.
8. Install Bulb E26*Type A* 3* 60W Max (Not Included) or E26*CFL*3*13W (Not Included)

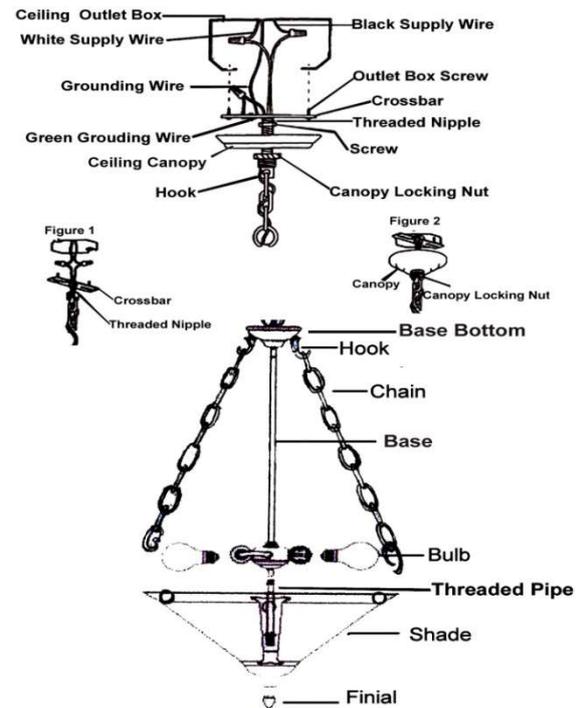

Caution: Refer to the wattage caution label located near the lamp holder for recommended maximum wattage, do not exceed recommended wattage.

9. Screw the Threaded pipe to the wire box.
10. Place another the end of chains to shade, then screw the finial onto shade carefully.
11. Restore Power.

Note: This stained glass product has been protected with mineral oil as part of the finishing process. Please use a soft dry cloth to remove any excess oil.



Intertek

Made in China



WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.