

Bathroom Vanity

#### Notice:

- 1. Follow the installation instructions. Please confirm all accessories are preset before
- 2. Do not fully tighten the screws during initial assembly. Fully tighten screws only once all pieces which are correctly assembled.
- 3. If you encounter any problems during installation, please contact our customer service.
- 4. Please unbox the item from the side with an open-label and put a carpet on the foor to avoid scratching it.







Put a carpet on the floor before unpacking

Item





Estimate installation time: 30 minutes

Item no.	Reference Image	Qty
Α		x1
В		x1
С		x1
D		x1
Е		x1


no.	Reference Image	Qty
1	Ø6x26mm	x6
2	Ø15x9mm	x6
3	@JJJJJJ Ø4 x 16 mm	x8
4	& man O o man	x4
5		x6






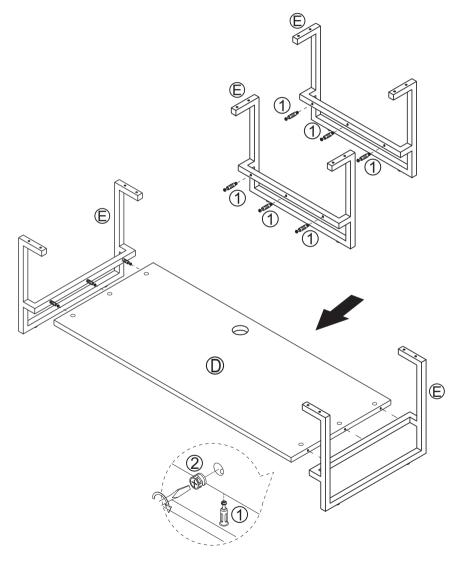




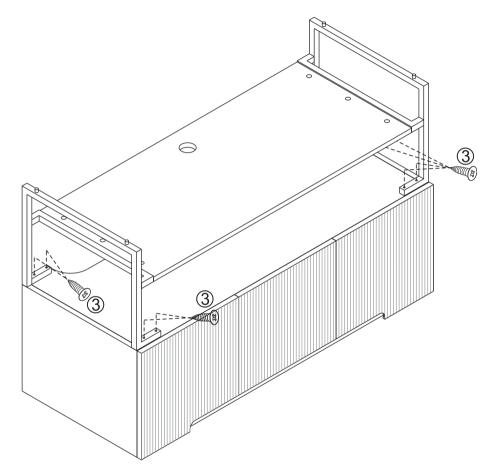








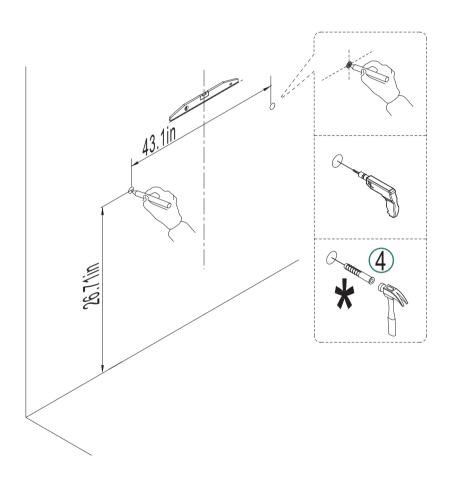





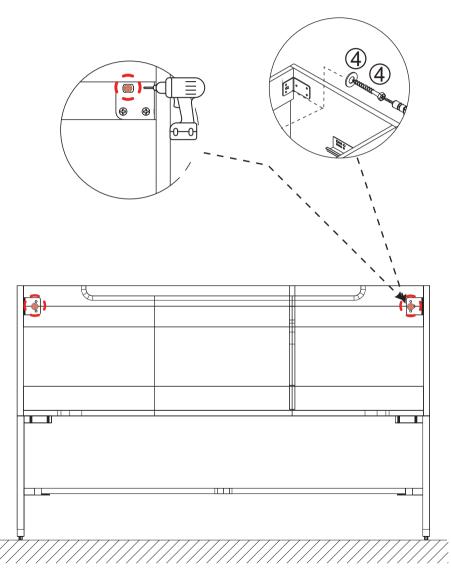


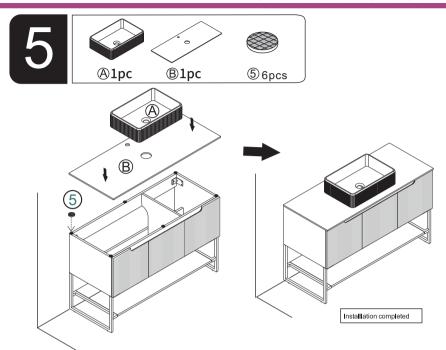

#### HINGE ADJUSTMENT AND REMOVAL INSTRUCTION




HOW TO ADJUST HINGES (if required)



DRAWERS REMOVAL & RE—INSTALLATION (if required)


### PIVOT-PRO side adjustment

Side adjustment of the door is made by using the indicated screw.

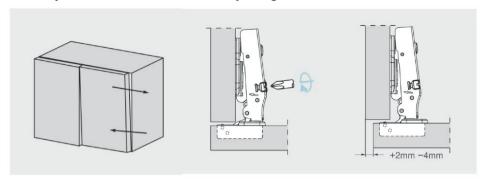

#### **PIVOT-PRO Depth Adjustment**

Depth adjustment is made without loosening any screw. The door can be moved in or outby rotating the cam adjuster on the hinge arm.

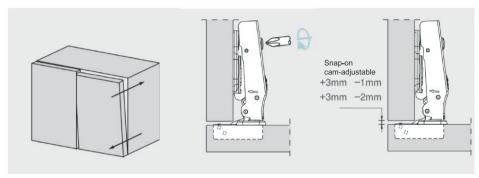

### **PIVOT-PRO Height Adjustment**

By loosening the two fixing screws to allow the mounting plate to slide up or down ,the door can be adjusted vertically by ±2mm. After retightening the screws, the Depth adjustment is done.

