


ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resided during shipping. If there is a defect:

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by

TOOLS REQUIRED



Ladder



Safety Goggles



Electrical Tape



Phillips Screwdriver



Flathead Screwdriver




Wire Cutter




Wire Stripper


HARDWARE INCLUDED




Fixture




Mounting Unit




Canopy




Spanner



Tube L150mm 1pc
& L300mm 3pcs




Mounting Screws




Wire Nuts


*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

EXPLODED PARTS

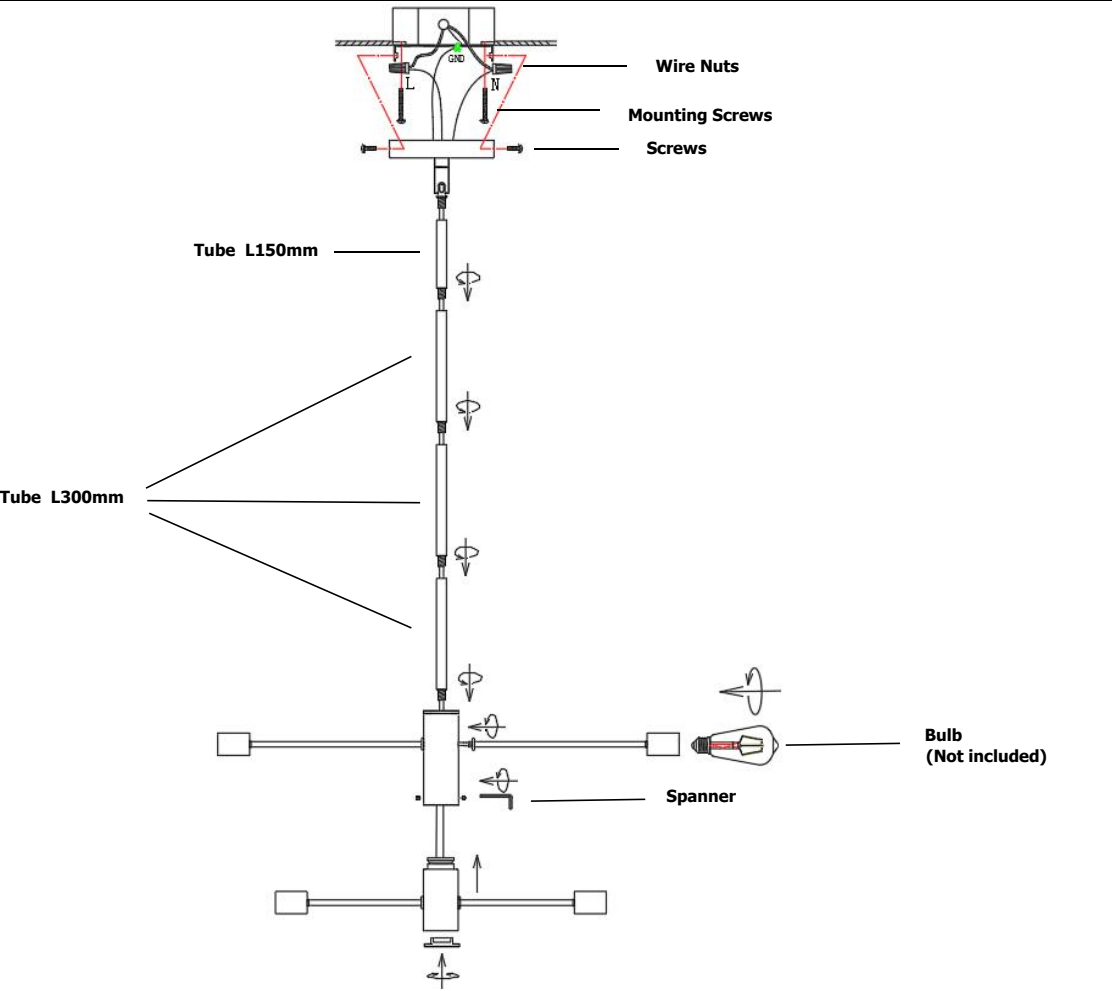


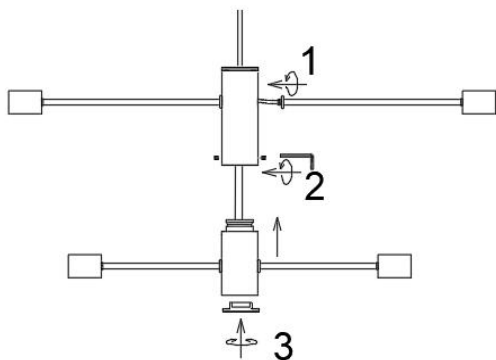

Step 1: Loosening the nuts(2) by the spanner, put the tube(1) into the lamp body, if the wire is too long, please adjust the wire by opening the bottom cap as above instruction.

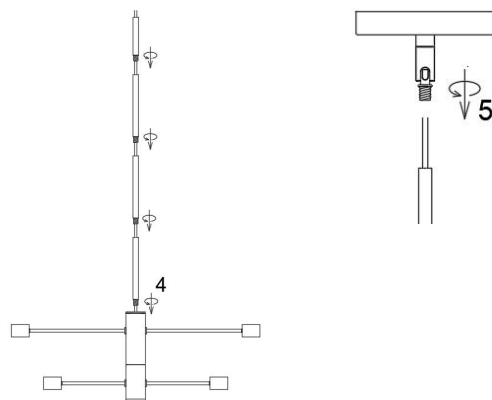


Step 2: Put the wire into the tube L300&L500 tube, and put the lamp body into the canopy as right top instruction.

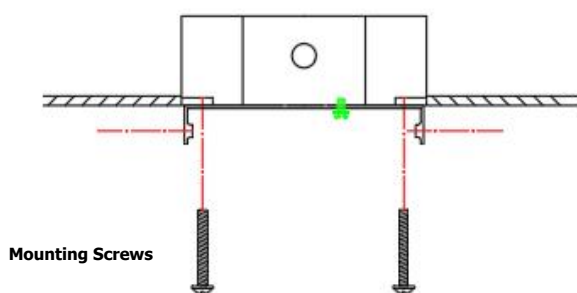


Mounting Screws

STEP 3 Put the mounting unit into the junction box, fixed it with the mounting screws.

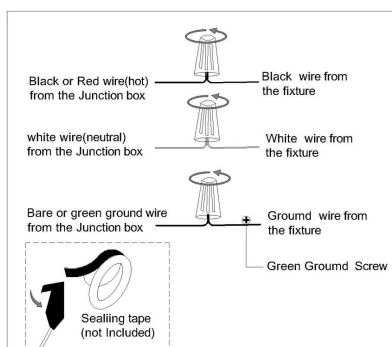


STEP 4

Make the electrical connection from the junction box to the fixture
Connect the ground wire to the mounting unit using the preinstalled green ground screws
Then, connect the positive, negative and ground wires with the supplied wire nuts, and secure with electrical tape.

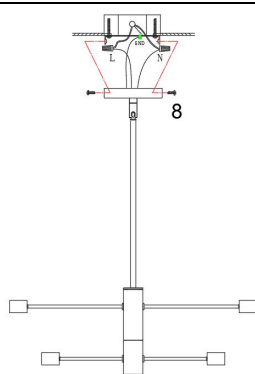

STEP 5 Install the fixture to the junction with the screws.



STEP 6 Finish the installation, install the light bulb to check the light function is normal or not.