

Parts & Hardware Included:


Product model :T6019/250

Lighting structure explosion diagram

Picture	Description	Qty	Check list
	Crown beauty	1	A
	Ø50*20 light holder	1	В
	M10*5 hexagon female	2	С
	Ø220*150 lampshade	1	D
-33333333333333333333333333333333333333	250mm long grape skewer	22	Е
	180*60 bracket	1	F
	Ø30*50 light cup With E12 lamp holder	1	G
	Ø19*250 inner dental tube	1	Н
•	Ø80 round piece	1	I
	Desk lamp switch cable	1	J
•	Ø150*25 lamp holders	1	K

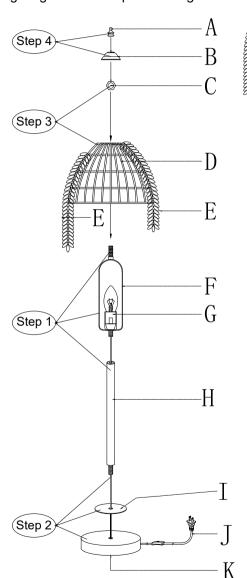





Installation procedure

1. Carefully disassemble and identify each part to ensure that you are ready

To install everything, place each part on a clean flat surface, such as a table

Son or floor.

2. Cut off the main power supply to the fuse box or circuit breaker in the house or building.

3: Installation steps (as prompted on the left)

Step 1: (Install and connect H-I-J-K-L) fittings.

Step 2: Follow the instructions on the left to install.

Step 3: Put the crystal lamp shade into the dental tube H and lock it tightly with the hexagonal female C.

Step 4: Cover the B lamp holder and lock it with A.

4. Install the light source, connect the power supply, press the switch on the switch line to test the light. Save these instructions for future use. If the lights do not work, you can contact our customer service team to resolve the issue 5: maintenance methods

Clean the water with a soft dry cloth or an electrostatic duster

Avoid using harsh chemicals and abrasives to clean the fixture and smooth the surface Deal

6: Use safety precautions

Your light is in the water, which will damage the wiring.

7: after-sales questions can be contacted on the platform order page

We hope you enjoy your new lighting as much as if your project achieved

Or exceed your expectations, we will be honored if you write us one

A review that shares your experience can help others and other customers get to know you

The idea. To your support like this we make money and we really appreciate it.

8: The finger mold and sweat left on the metal and crystal surface of the lamp body after installation

The trace can be cleaned with a soft dry cloth or an electrostatic duster.