## Assembly Instructions

Caution: You must read this before you proceed

### **Care & Maintenance**



• Not for commercial use. For residential use only.



 Furniture may scratch floors. We recommend using furniture pads to protect your floors.



Do not put hot items directly on furniture surface.



Do not clean furniture with harsh cleansers or polish.



Do not place furniture under direct sunlight.



Do not place furniture near heating or cooling vents.



 Do not write on furniture without a padded barrier to protect the surface.



Do not place furniture outside . For indoor use only.



 Stains may be removed with mild soap solution and damp cloth.




• Children should not climb or jump on the furniture.



 Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in Leg for hardware pack.

# Dining Chair

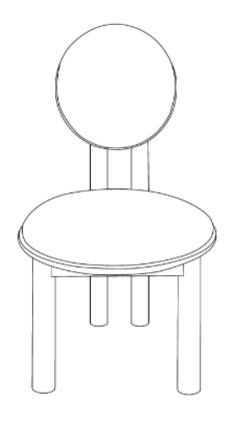

# Parts List

Label	Picture	Description	QTY
А		Chair Back	1
В		Chair Seat	1
С		Front Leg	2 Page 2 0F


<u>Hardware</u>					
Label	Picture	Description	QTY		
1		Bolt (M6*65mm)	9		
2		Spring Washer (M8)	9		
3		Flat Washer (M8)	9		
4		Allen Wrench	1		
Assembly Preparation					
Before			X 9 X 9		
Beginning Assembly:	X2		■ X9		
Read instructions, cover to cover-  Have 2 adults on hand for assembly-  Do not assemble on flooring or carpet-  Assemble on a clean non-marring surface (packing foam)-  Save all packaging until finished-					

## Assembly Steps

# Chair Seat (B) Chair Seat (B) Front Leg (C)


This Dining Chair has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Dining Chair parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly

FRONT FACING

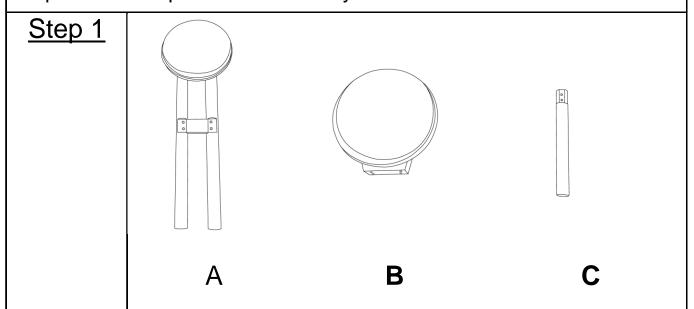

Place the Chair Back(A), the Chair Seat(B), the Front Leg(C) onto a clean, non-marring surface.

## Step 2

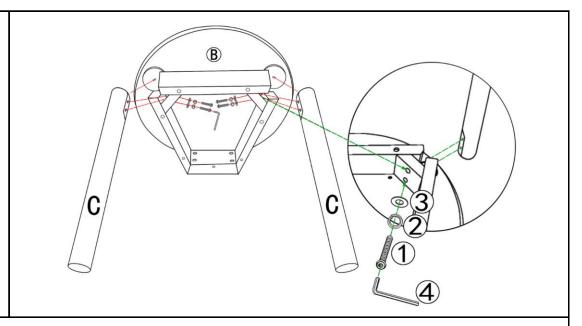


You will now have the Chair Seat (B) bottom and the Front Legs(C) facing upwards.

Insert the Front Legs(C) completely vertical into the Chair Seat (B) corners, then attach using Bolts(1)+Spring Washers(2)+Flat Washers(3) and the Allen Wrench(4).

At this point in the assembly.DO NOT fully tighten the connections.

## Step 3

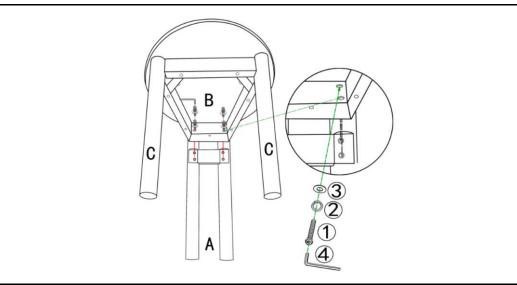

Place the Chair Back(A) on a clean, non-marring surface.

Align the mounting positions on the Chair Seat(B) to the mountings on the Back with Chair Back(A).


Attach the middle mounting position, using Bolts(①)+Spring Washers(②)+Flat Washers(③) with Allen Wrench(④).

Attach the three corner mounting positions using Bolts(①)+Spring Washers(②)+Flat Washers(③) with Allen Wrench(④), as shown in thepicture above.

#### Frendly notice:

If the mouonting positions cannot be aligned well which hinders the installation, then sway the Chair Seat (B) lightly when locking the Bolts, this action could help avoid the Bolts getting stuck and ensure assemble smoothly.

Do not fully tighten the Bolts.

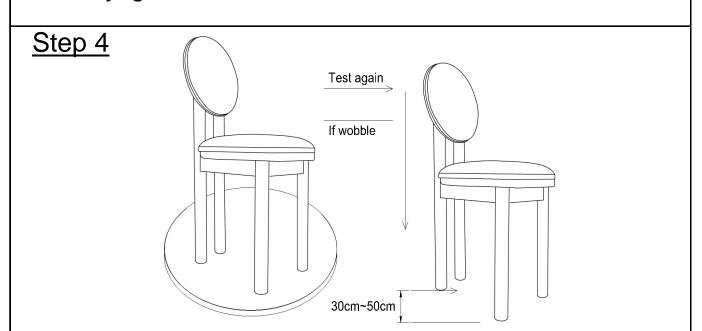

Place the Chair on a level Surface to check for wobbles.

If it wobbles, lift the Chair some 30cm to 50cm high from the ground. Keep your feet and toes well away from the drop zone.

Drop Chair freely and vertically, with all four legs hitting the ground at the same time.

This Drop Test will help to ensure that all Bolts and gaps reach full alignment status.

Test again for evenness on a Level Surface.

If no wobbles are found, proceed to tighten all the Bolts.

When tightening the Bolts, tighten sequentially.

Do not fully tighten any Bolt fully and then move on towards the next one. This may cause the frame to warp.

If there is still wobbles, loosen the Bolts and execute this same drop test.

