



















# PARTS CHECKLIST


 Ax1	 Bx1	 Cx1	 Dx1	 Ex2
 Fx2	 Gx2	 Hx1	 Ix2	 Jx2pcs
 Kx2pcs	 Lx1	 Mx6pcs  Nx12pcs	 Ox6pcs	 Px1




**Step 1 :** Attach Seat **C** to the Left Armrest **A** and Right Armrest **B** with Gasket **Ox6** and Screws **Mx6** by Allen Wrench **P** as the picture.

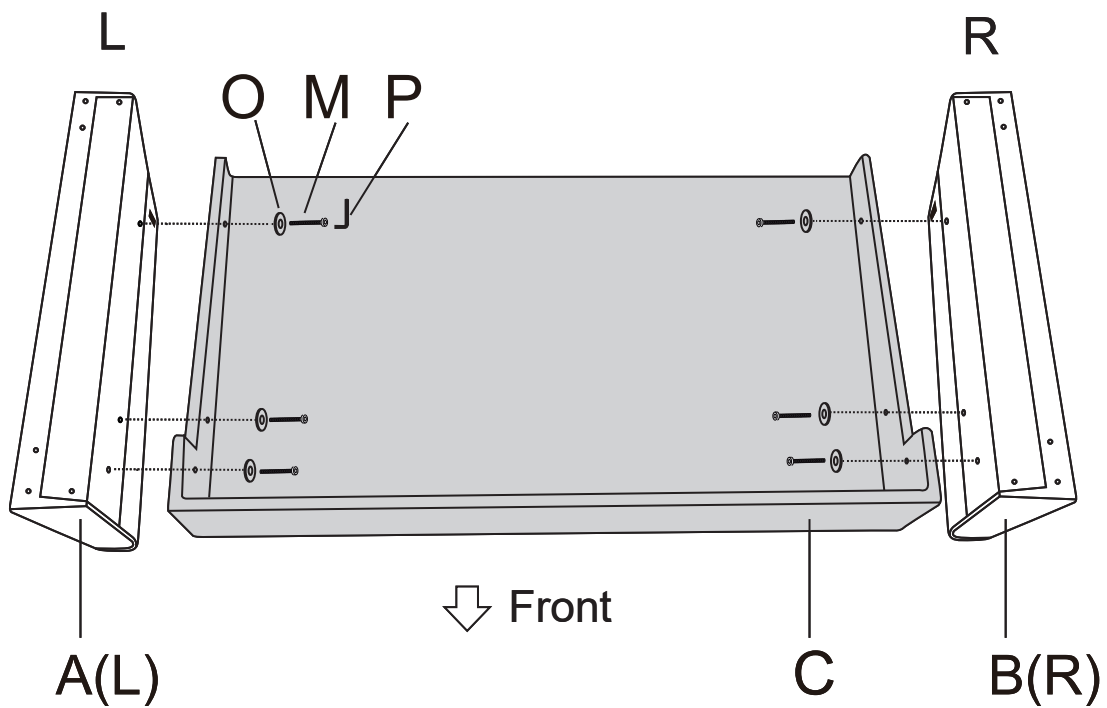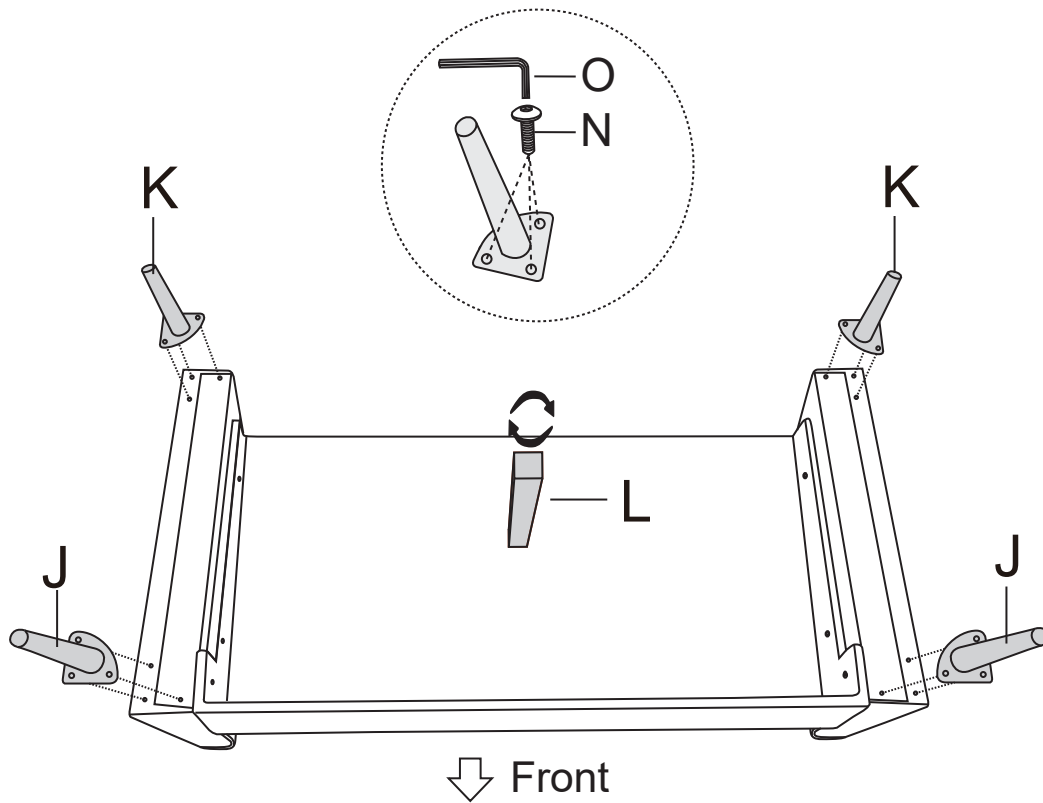


**Step 2:** Attach Foreleg **Jx2** and Hind Leg **Kx2** with Screws **Nx12** by Allen Wrench **P**.

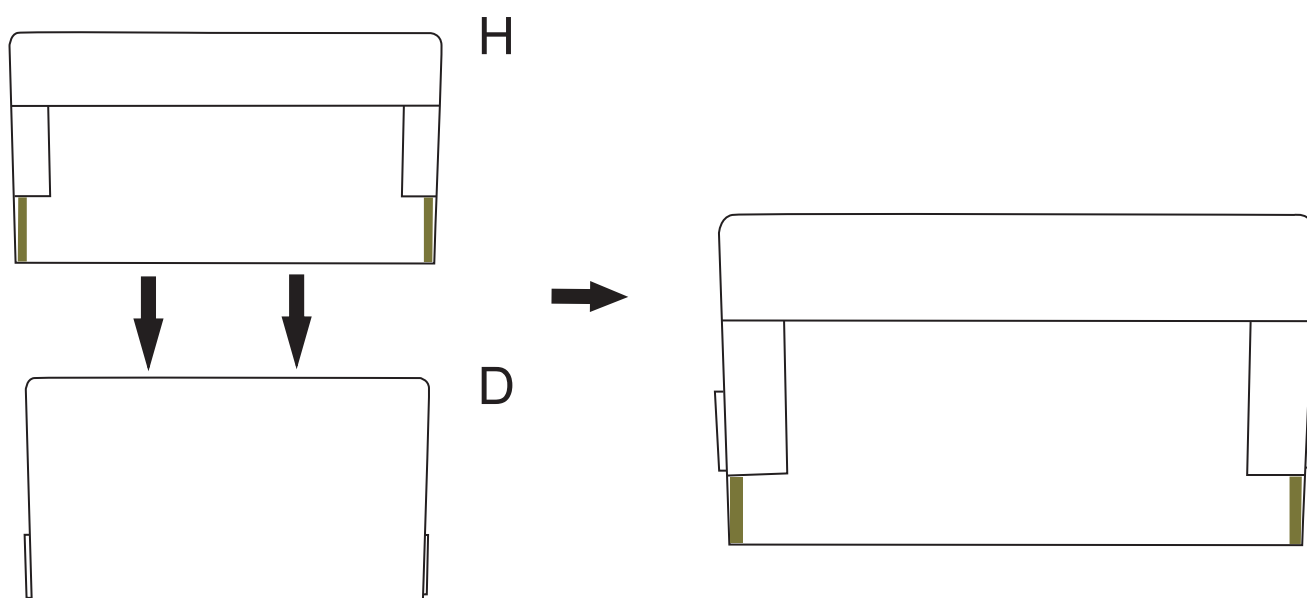


**Step 3:** Put the back cover **H** onto back frame **D**. Paste the velcor of back cover onto the fabric of back frame. Carefully align the edge of the back frame.

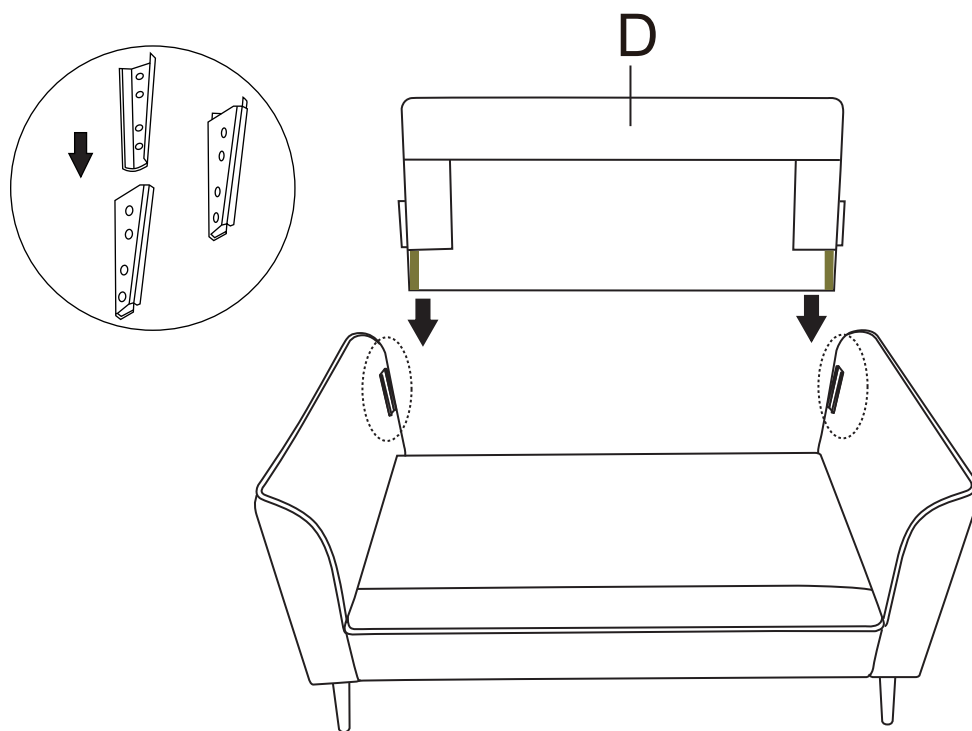


**Step 3 :** Attach the Backrest **D** to the armrest with the slots as picture.

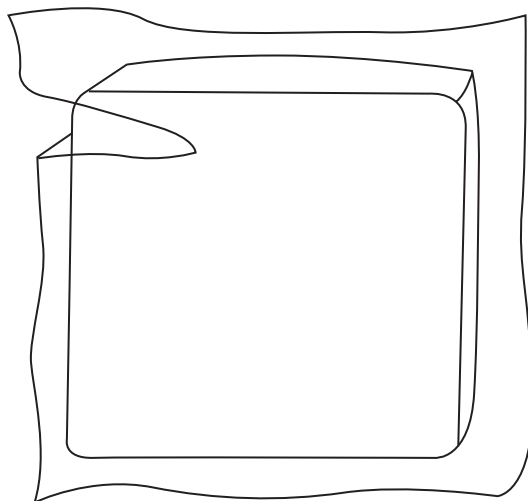

**Step 4:** Take out the Seat Cushion **F** from the package, knock it to restore the foam inside, the marks on the cushion will gradually disappear itself in 48 hours.

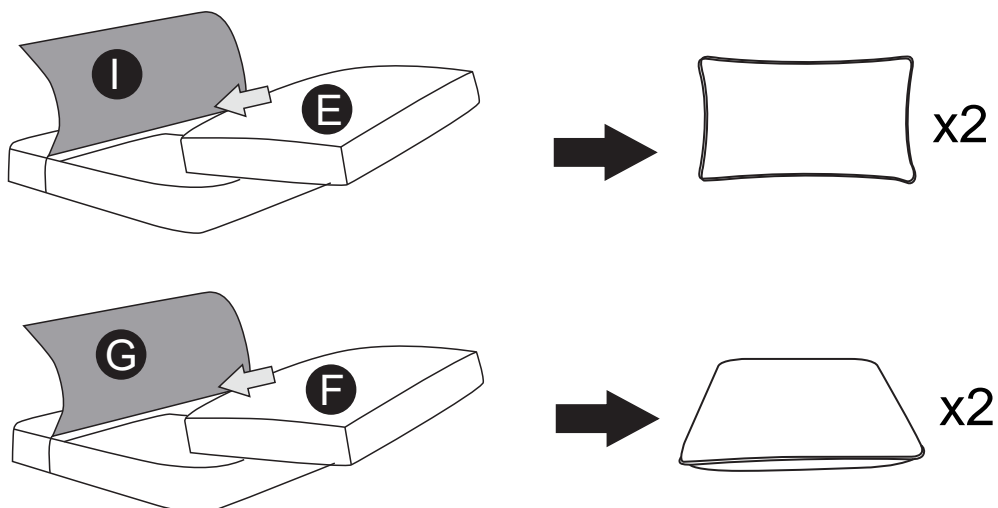

**Step 5:** Put the Back Cushions **E** into covers **I** accordingly, then zip them up.  
Put the expanded Seat Cushions **F** into covers **G** accordingly, then zip them up.

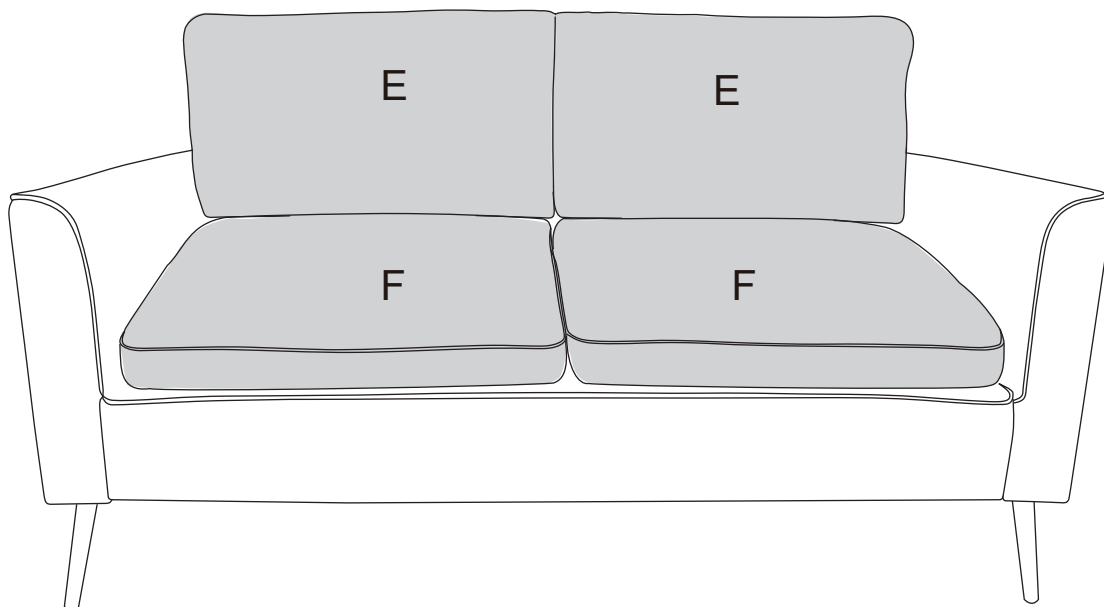

**Step 6:** Put the cushions on the sofa and adjust the back frame cover.  
Now, enjoy your new sofa!