Assembly Instructions

Caution: You must read this before you proceed

Care & Maintenance



Not for commercial use. For residential use only.



 Furniture may scratch floors. We recommend using furniture pads to protect your floors.



Do not put hot items directly on furniture surface.



• Do not clean furniture with harsh cleansers or polish.



• Do not place furniture under direct sunlight.



Do not place furniture near heating or cooling vents.



 Do not write on furniture without a padded barrier to protect the surface.



Do not place furniture outside . For indoor use only.



 Stains may be removed with mild soap solution and damp cloth.




Children should not climb or jump on the furniture.



 Dust and pick-up spills using a clean, non-colored, lint-free cloth.


Please look in boxes for hardware packs and legs. Sets often ship in multiple boxes and may arrive a day or two apart.


CHAIR



Parts List				
Label	Picture	Description	QTY	
А		Backrest	1	
В		Seat	1	
С		Front Foot	2	
D		Back Foot	2	

Hardware				
Label	Picture	Description	QTY	
1)		Bolt (M8X55mm)	3	
2		Bolt (M8X40mm)	9	
3		Bolt (M8X20mm)	5	
4		Bolt (M8X14mm)	9	
(5)		Spring Washer	11	
6		Flat Washer	15	
7		Allen Wrench	1	
8	0 0	L (50*50*30MM)	2	
9	00	L (30*30*30MM)	4	
Assembly Preparation				



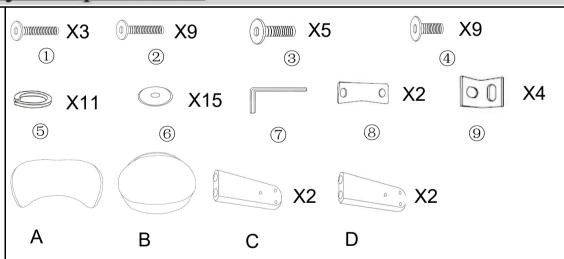



Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




Assemble on a clean non-marring surface (packing foam)-




Save all packaging until finished-

Assembly Steps

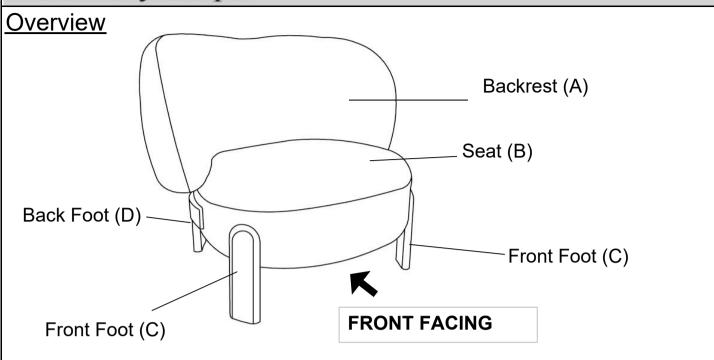

This Chair has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Barstool parts, the above picture is provided to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

Friendly reminder: Tighten all the screws after all holes are installed.

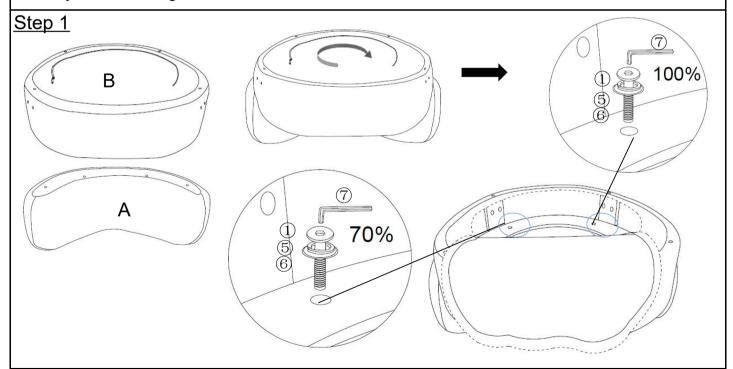


Take out Backrest(A) and Seat(B), attach Seat(B) to the Backrest(A) as shown.


Unzip the bottom of Seat(B) to expose the screw holes at the bottom of it.

Use Bolt (1), Spring Washer(5), Flat Washer(6) with Allen Wrench(7) to fix the holes for connecting the seat and backrest

After all the bolts are in place, use Allen Wrench(\bigcirc) to tighten all the bolts.

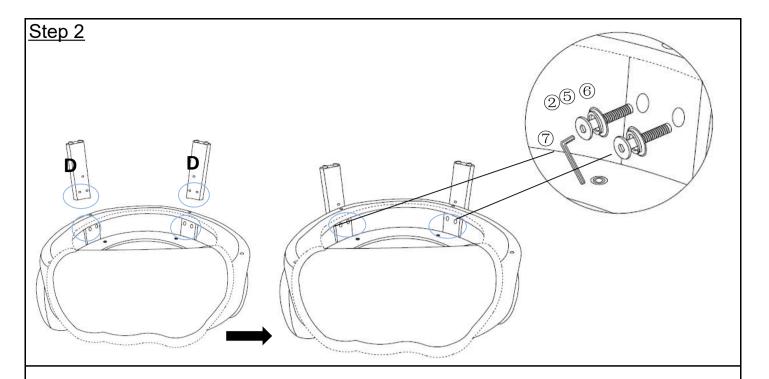


Take out Back Foot (D), align the holes to the back of the seat frame. Use Bolt (②), Spring Washer(⑤), Flat Washer(⑥) with Allen Wrench(⑦) to tighten it.

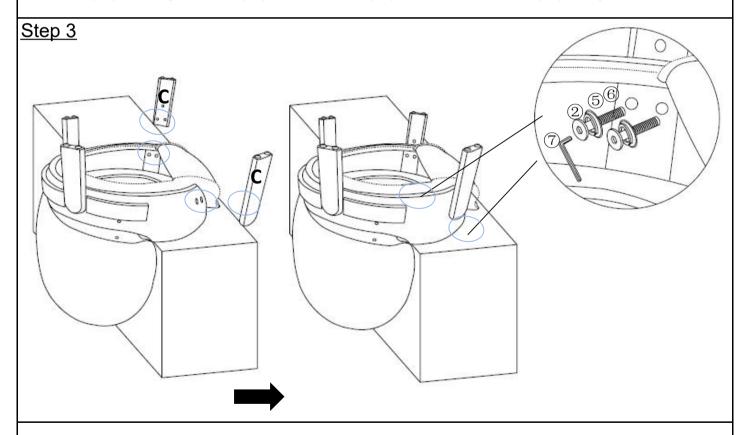


Take out Front Foot(C), align the holes to the front of the seat frame.


Use Bolt (②), Spring Washer(⑤), Flat Washer(⑥) with Allen Wrench(⑦) to tighten it.

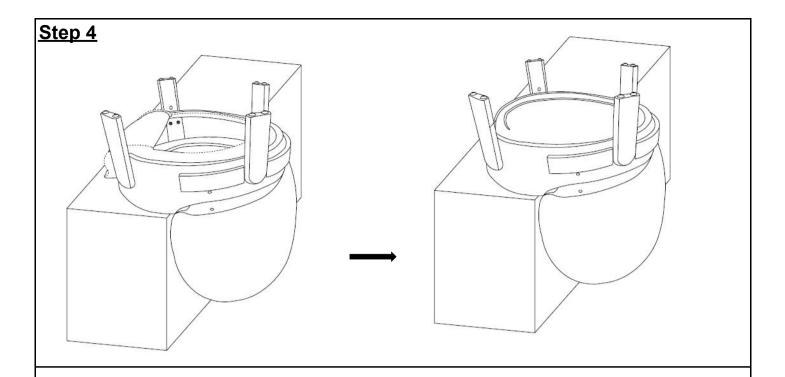

Zip up the bottom the Seat.

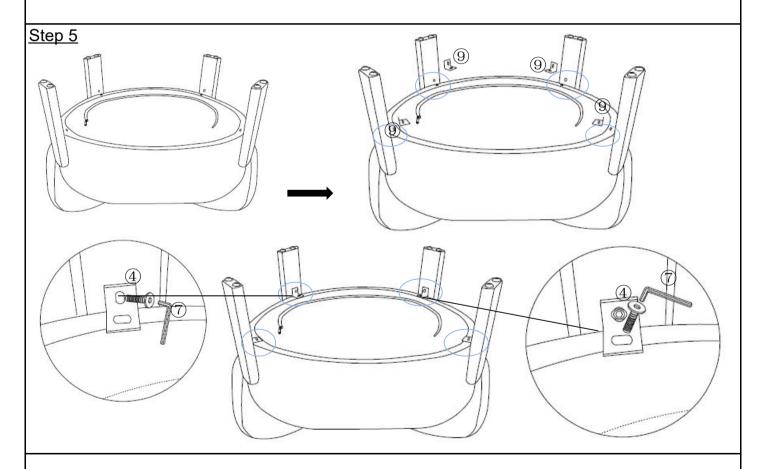


Take out L-shaped iron(\mathfrak{P}), asign it to the holes of the legs as shown. Then use bolt(\mathfrak{P}) with Allen Wrench(\mathfrak{P}) to tighten it.

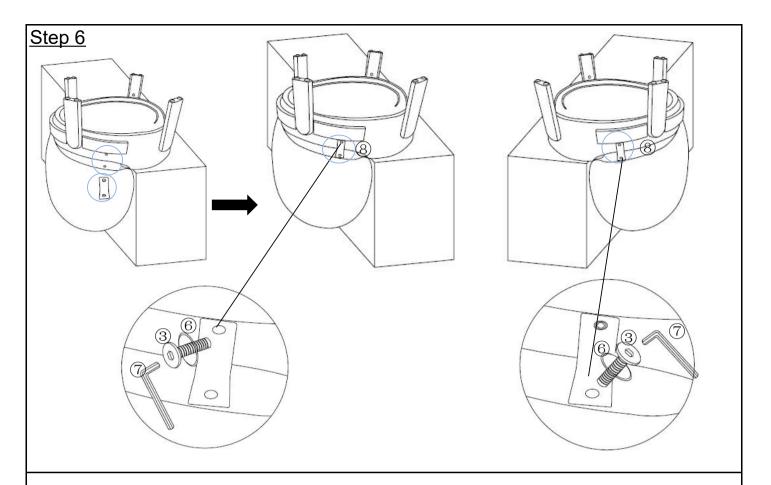

Take out L-shaped iron(8),asign it to the holes of the backrest as shown. Then use bolt(3) and Flat Washer(6) with Allen Wrench(7) to tighten it.

Step 7



Place the Chair right side up and tested for stability.

Fully Tighten all the bolts.

Your Chair is ready for use.

This CHAIR can only be used on a flat, level surface.