
Bestier ASSEMBLY INSTRUCTION







Know more about Bestier from

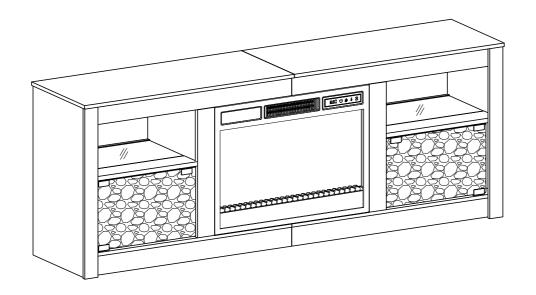







CUSTOMER SUPPORT

CONTACT US BY: PHONE: 888-666-1086 EMAIL: Service@bestier.net

Thanks for choosing Bestier!
Feel free to contact us if you need any help.
Please kindly share your shopping experience
with us on the platform if you are satisfied with it.

HELPFUL HINTS

⚠ BEFORE YOU START

- Inspect product packaging to ensure the appearance is good.
- Read the assembly instruction carefully and follow it step by step.
- To avoid any scratching, putting a soft blanket on the floor is suggested.
- Identify, sort and count all the parts with tags.
- Find out installation position according to the drawing and install it in correct steps.



OTHER


- People needed for assembly: 1-2.
- Estimated assembly time: 1.5-2h.

ACAUTION


- Be cautious when using a power drill or power screwdriver.
- Please be aware to slow down and stop when screw is nearly tight.
- Do Not use any harsh chemicals or abrasive cleaners for this item.
- Push, pull or drag this item carefully.


Dimensions & Weight Capacity


UNIT:INCH/CM

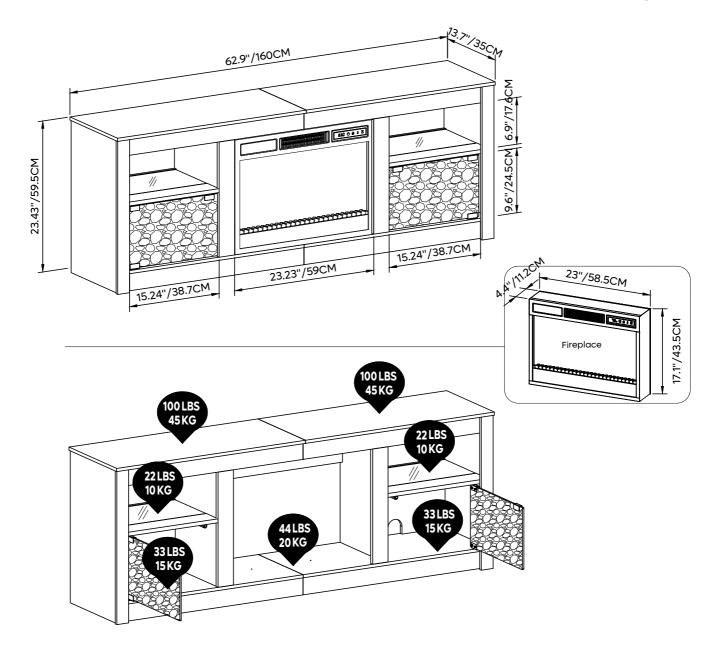

DETAILS

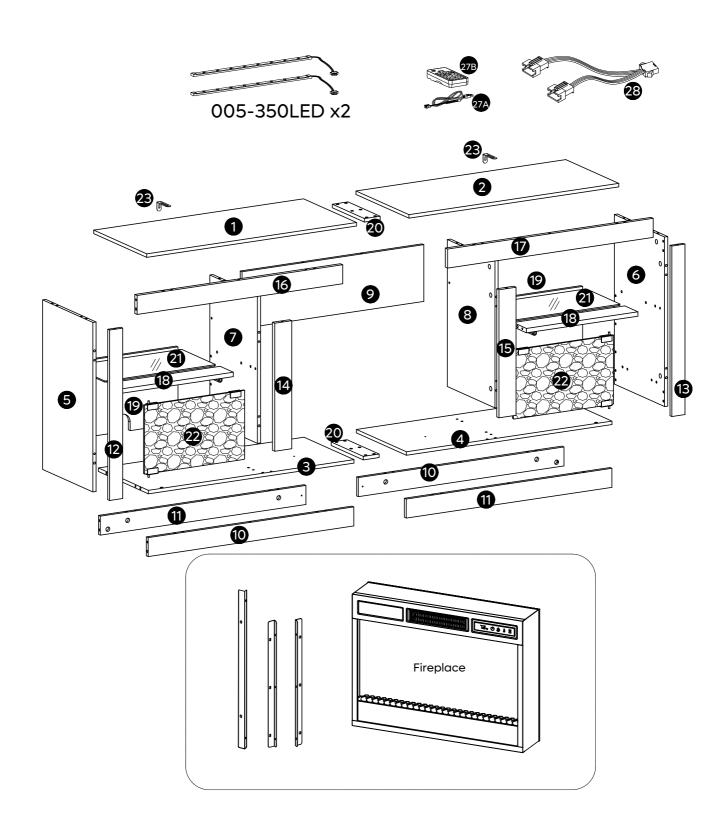


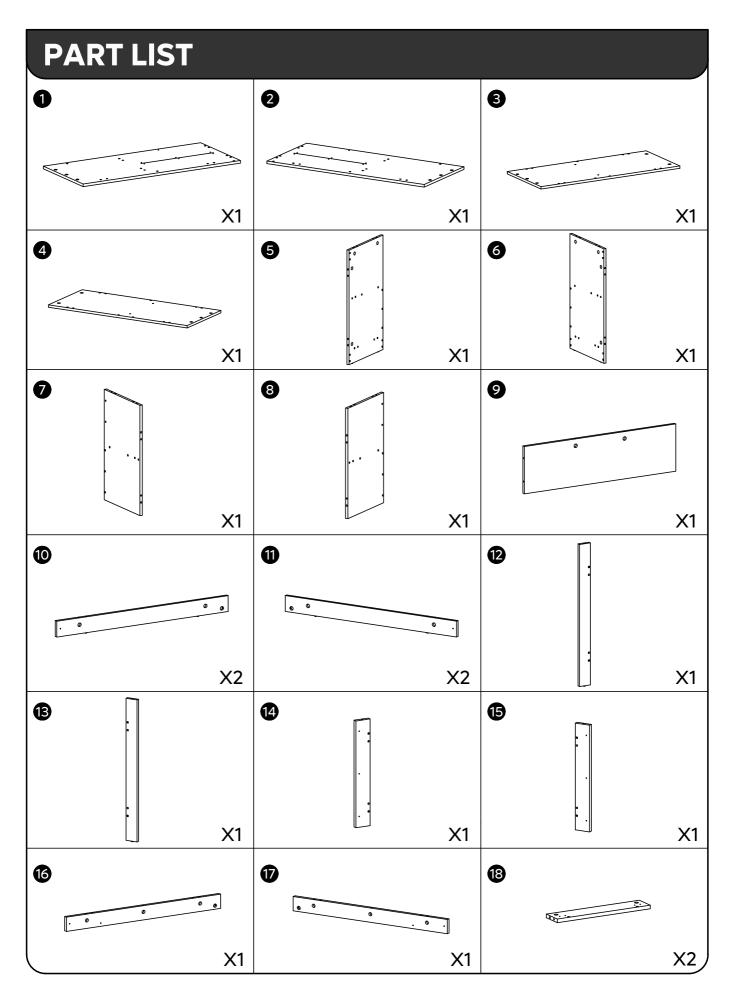

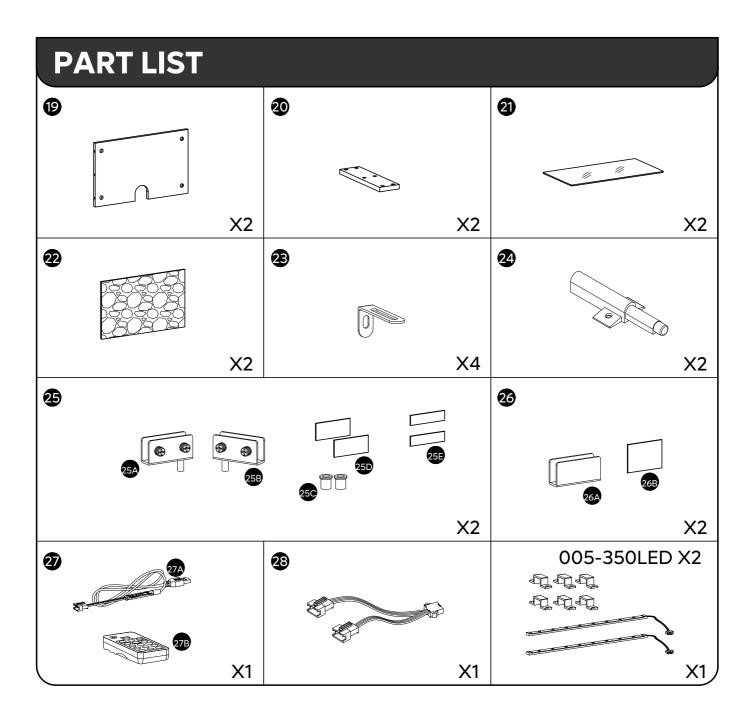

ACCESSORY LIST			
A	ST6x35mm	58+3	
В	Ø15mm	58+3	
C	Ø6x30mm	56+6	
D	ST5x40mm	10+1	
Œ	M6x20mm	12+1	
Œ	ST3.5x10mm	22+1	
G	ST3x14mm	4+1	
	M6x6-Ø9mm	8+1	
		3	0 0
	ST4x35mm	2	
K		2	Terror Jenn
	M4	1	


Detailed Installation for Accessory A B

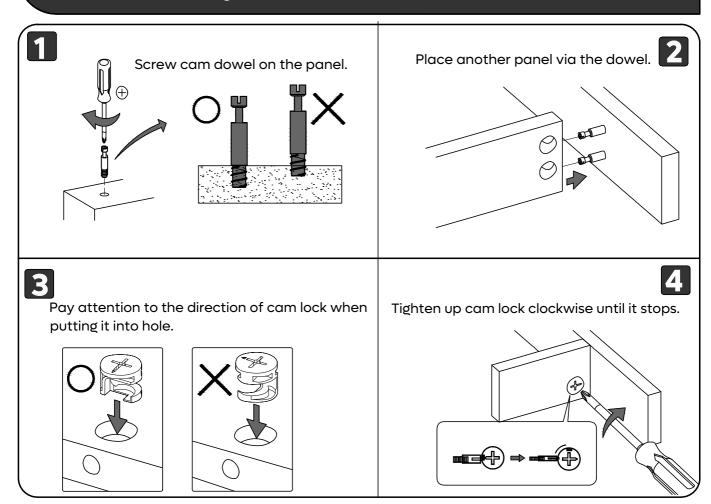

Detailed Installation for LED Strip


1

Remove about 25mm (1") of adhesive tape at both ends of LED light strip.

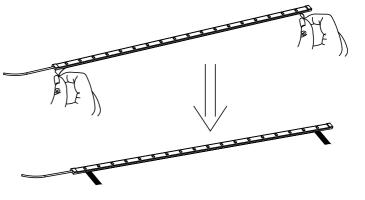


2

 The head and tail of the LED light strip are pasted in a straight line, and the fixing parts at both ends are locked with screws.

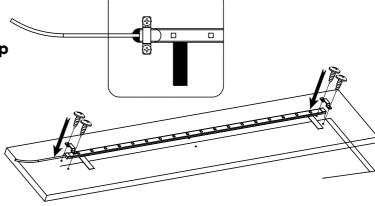


3

 Tear off the whole protective paper, and flatten the strip light so that the LED light strip is completely adhered to the wood.

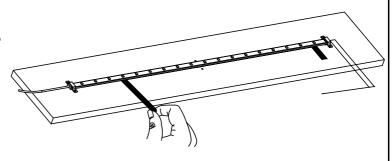


4

Lock the remaining fixings.

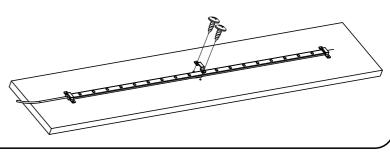

%Remote control battery installation procedure

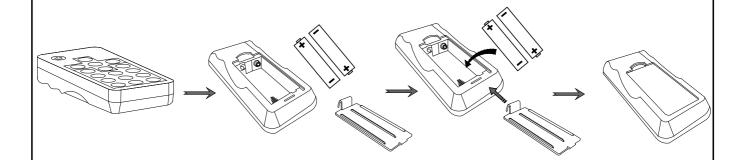



- 1. The battery compartment is located on the back end of the remote control.
- 2. Press and slide the battery door open.
- 3. Insert 2 AAA batteries, checking that the + and sides of the battery match inside the battery compartment.
- 4. Replace the battery compartment door.
- 5. Batteries are not included in the package due to safety transportation.


Note:


A. Do not mix old and new batteries together in the remote.


B. Do not mix alkaline, standard(carbon-zinc), or rechargeable (NiCad, NiMh, etc.) batteries together.

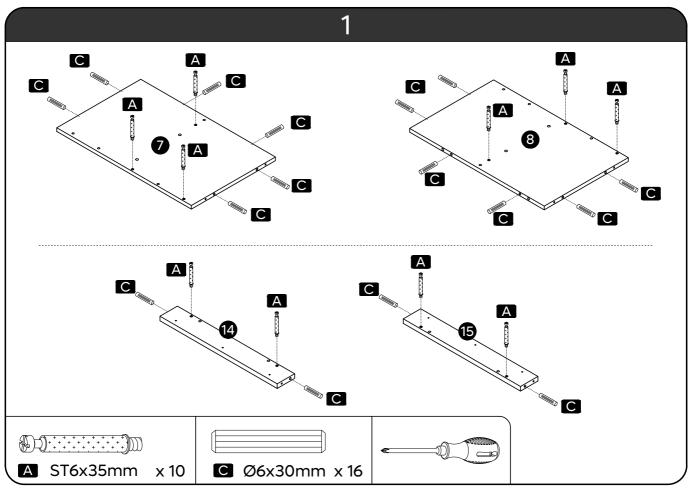


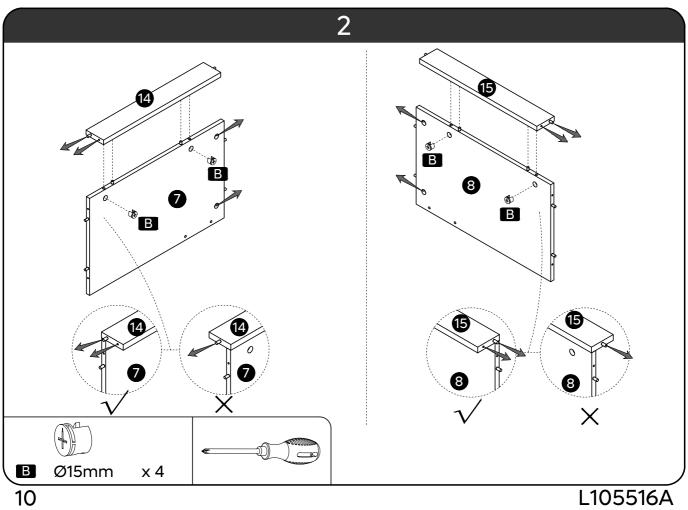


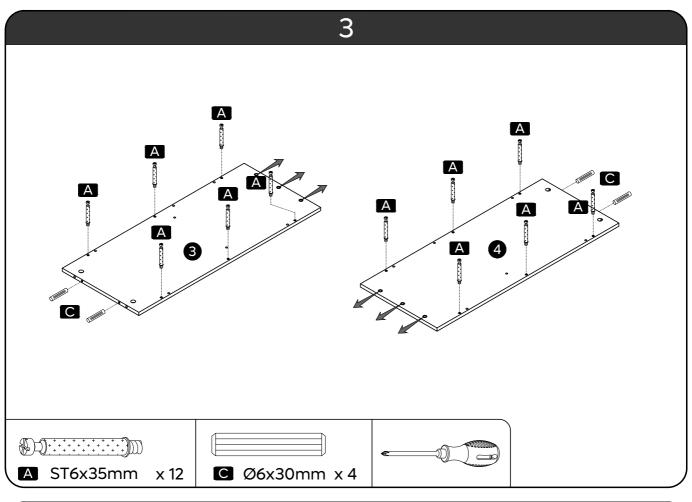


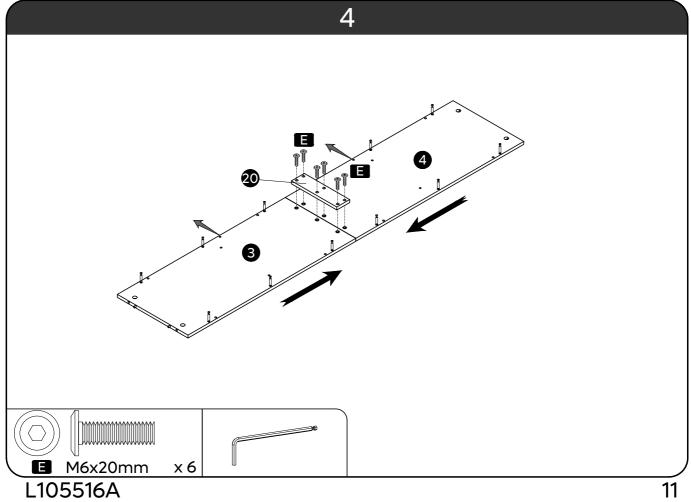


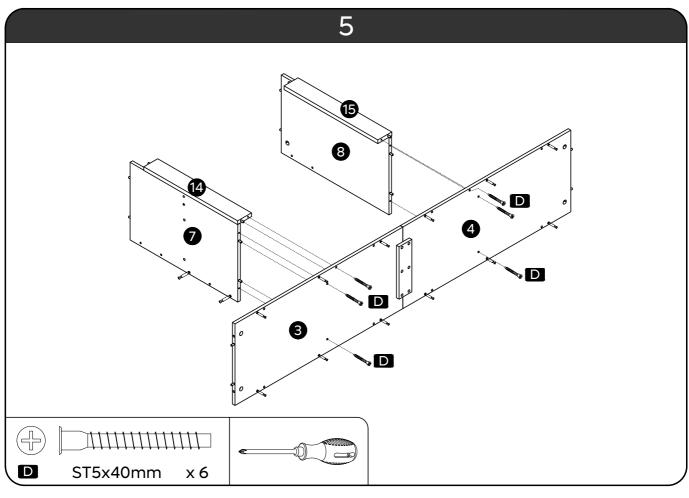


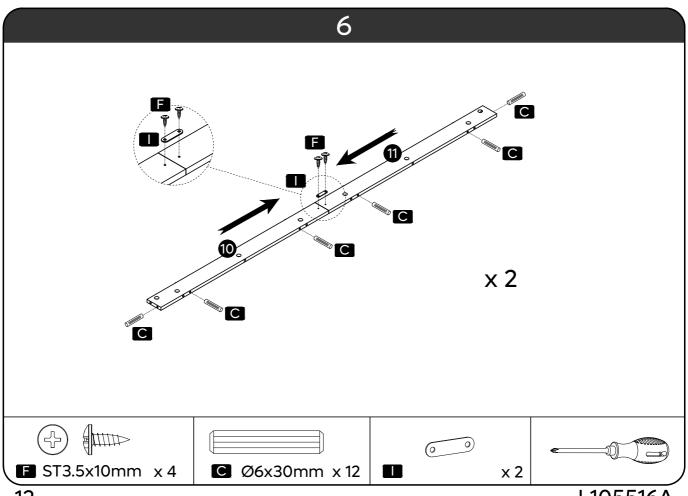


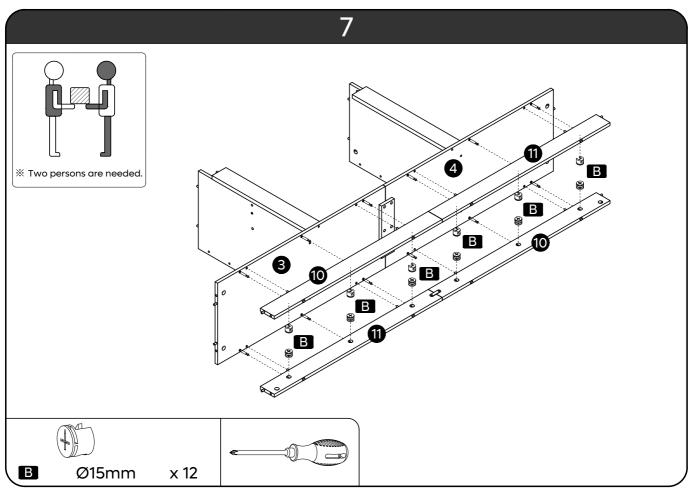


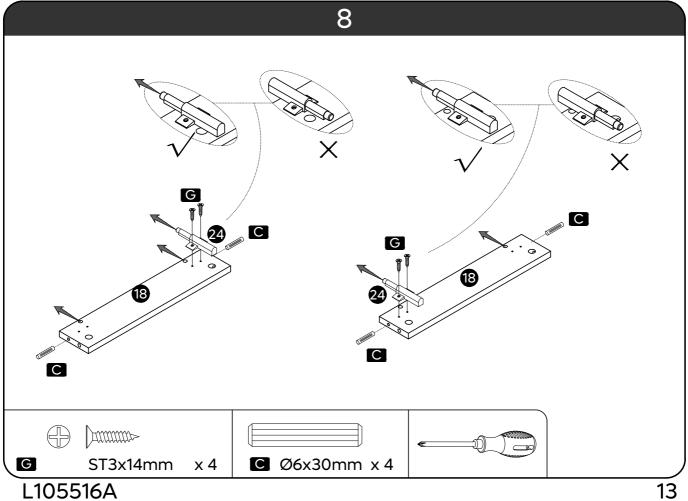


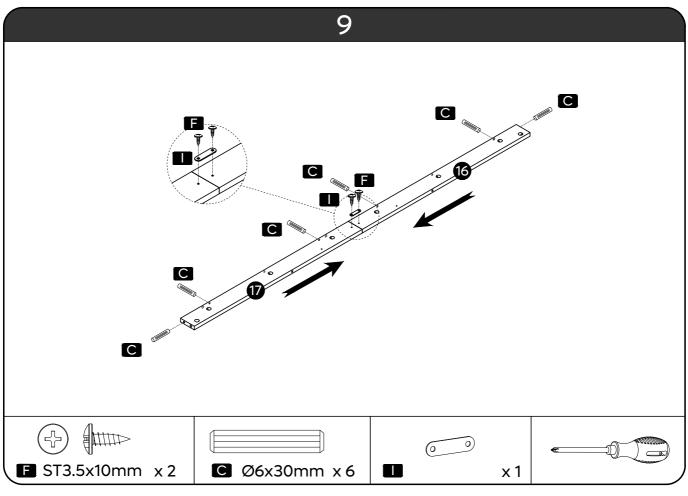


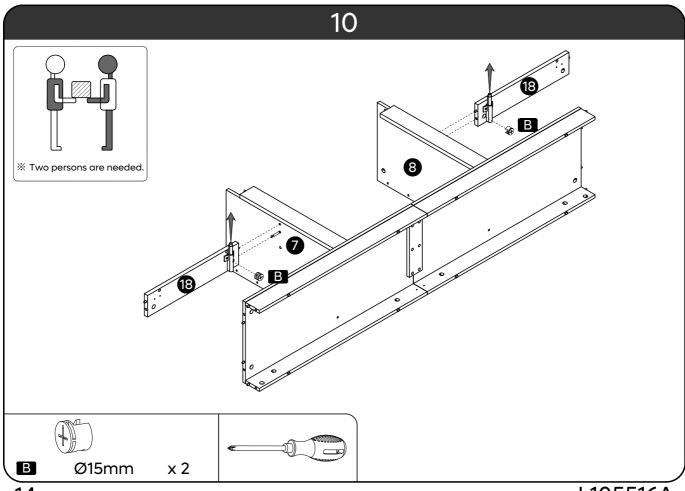


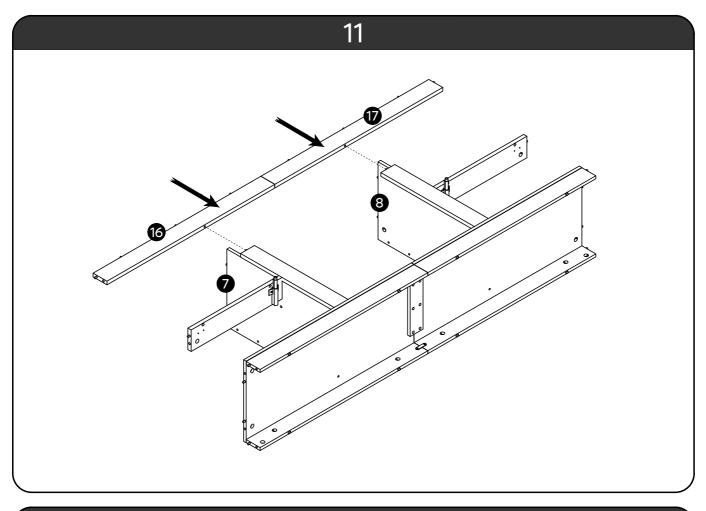


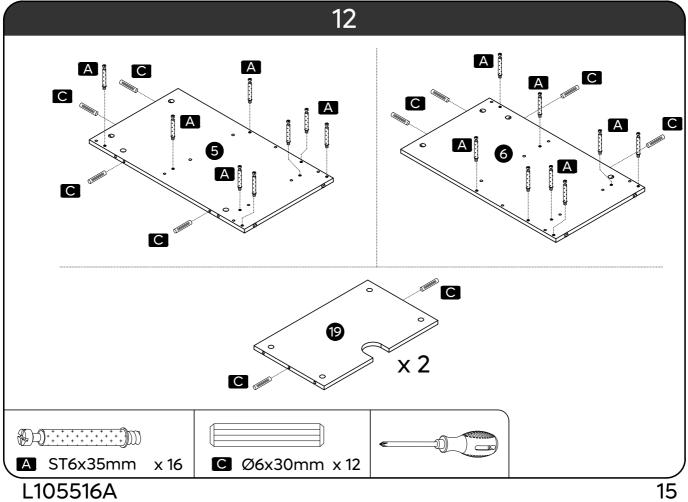


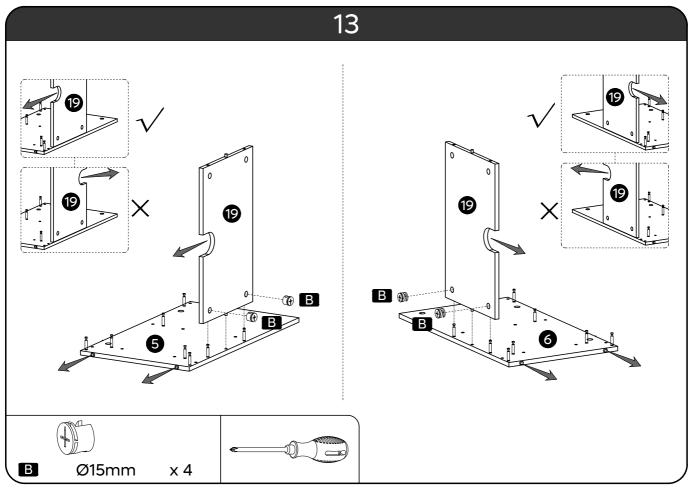


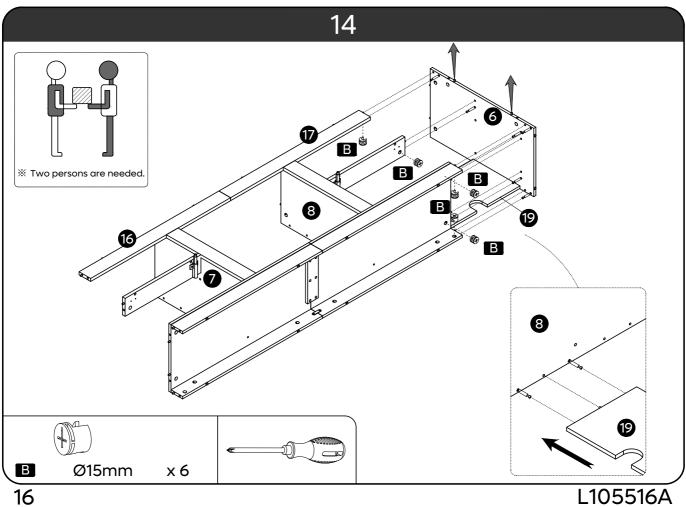


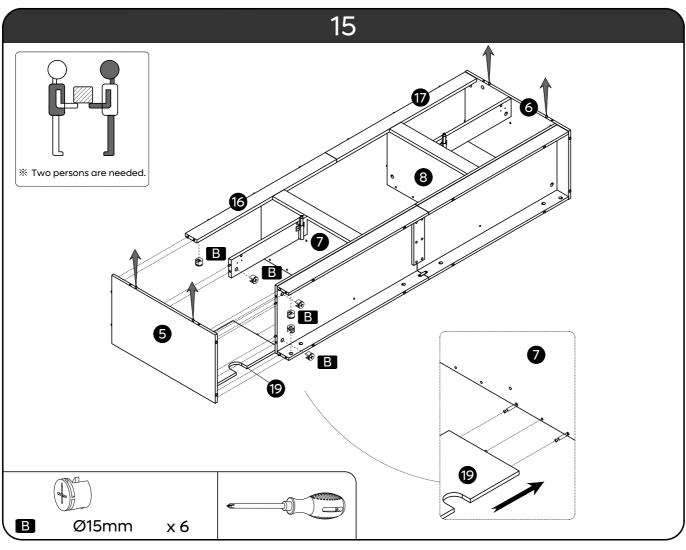


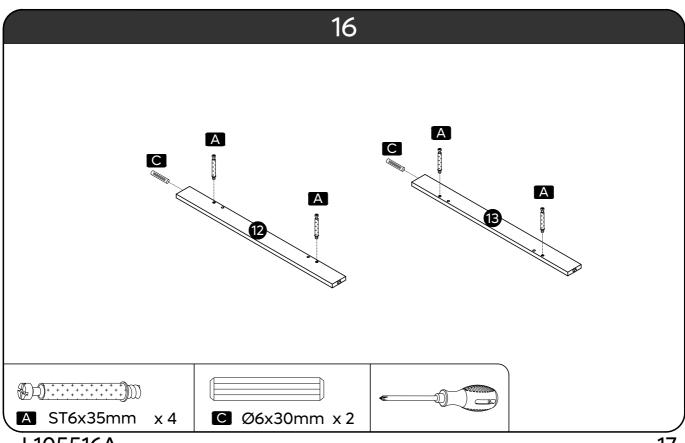

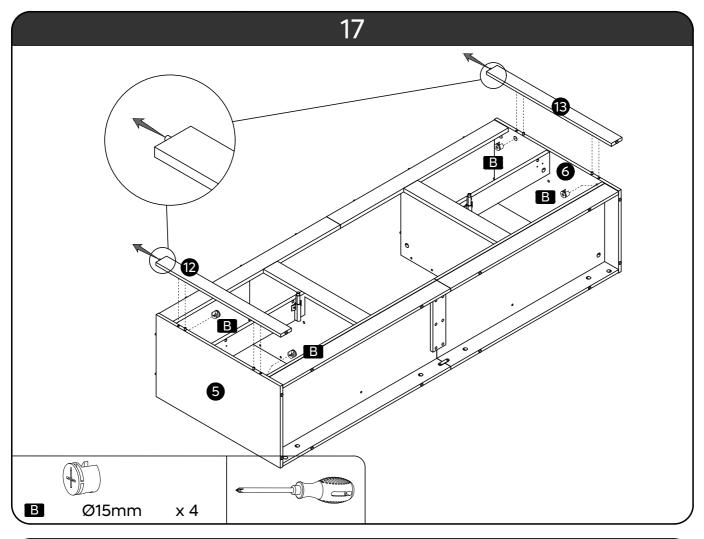

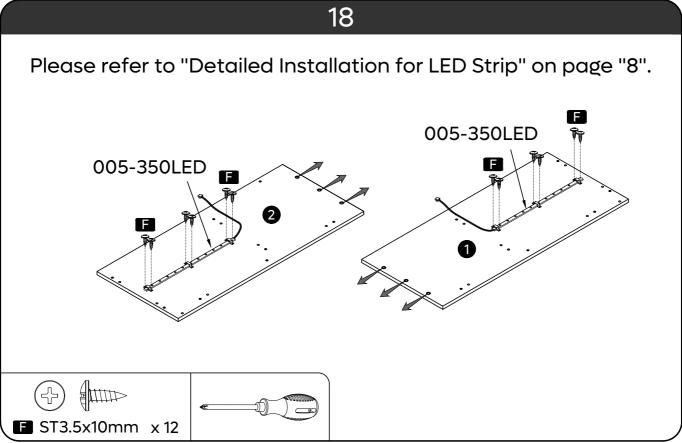


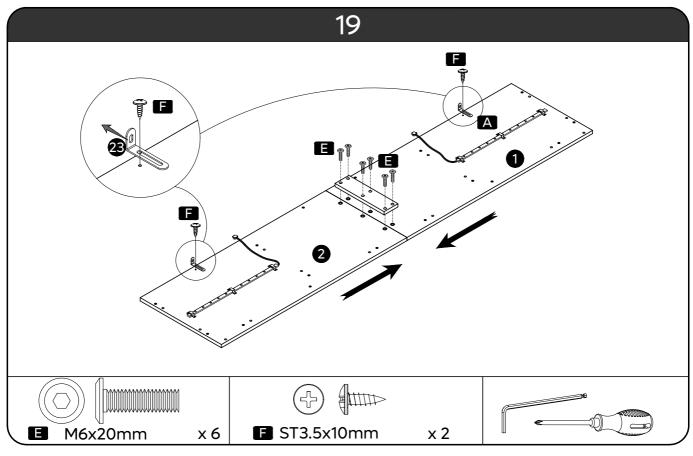

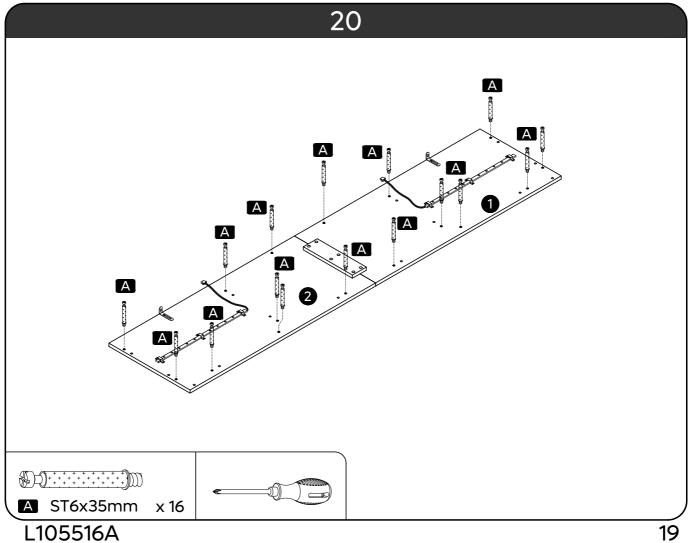








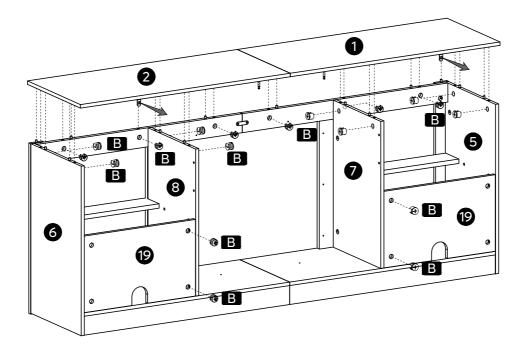




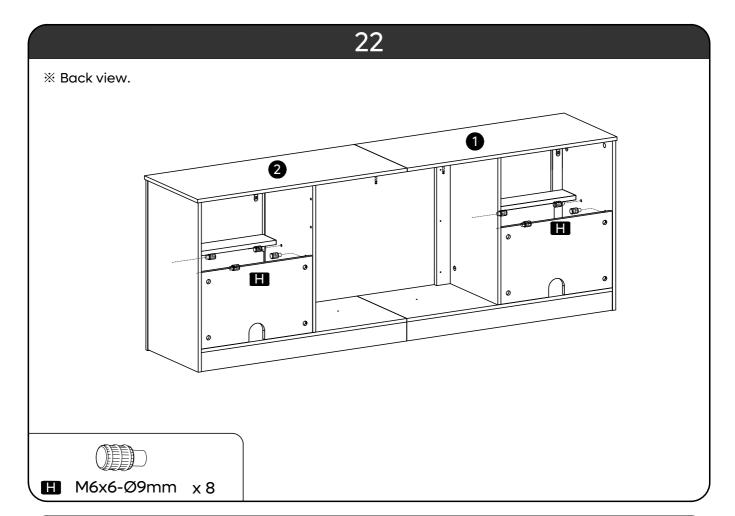


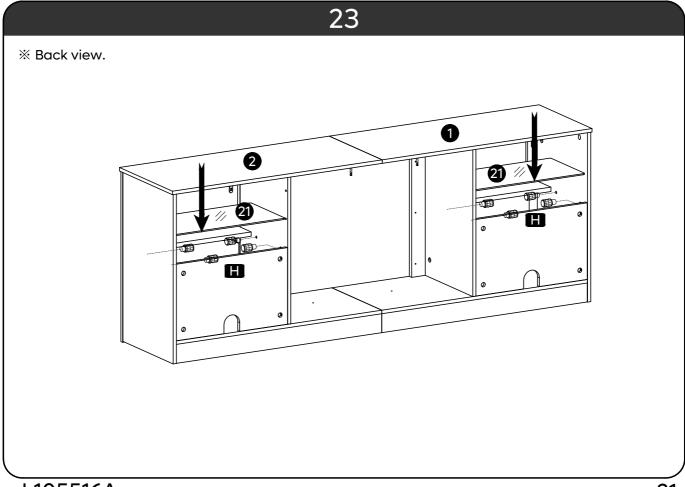


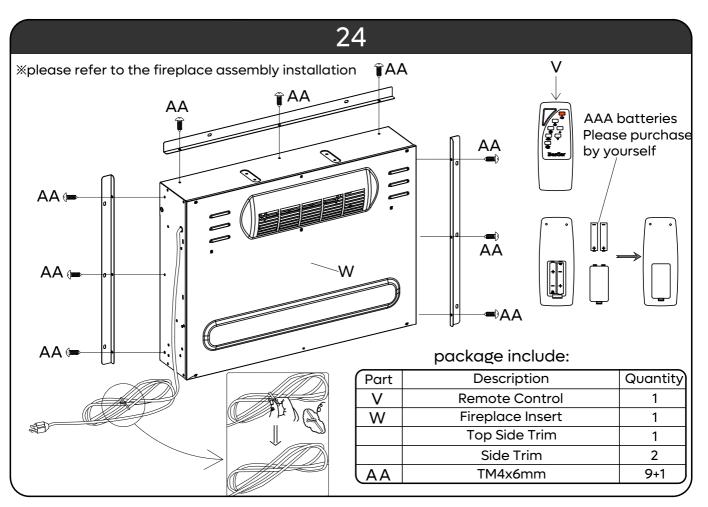


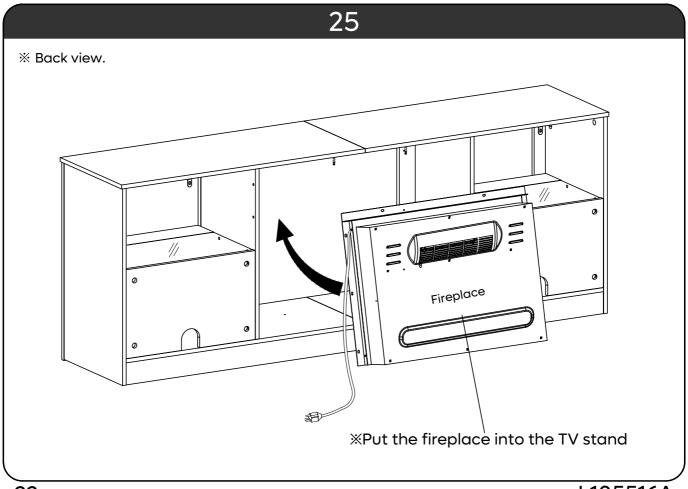



% Back view.

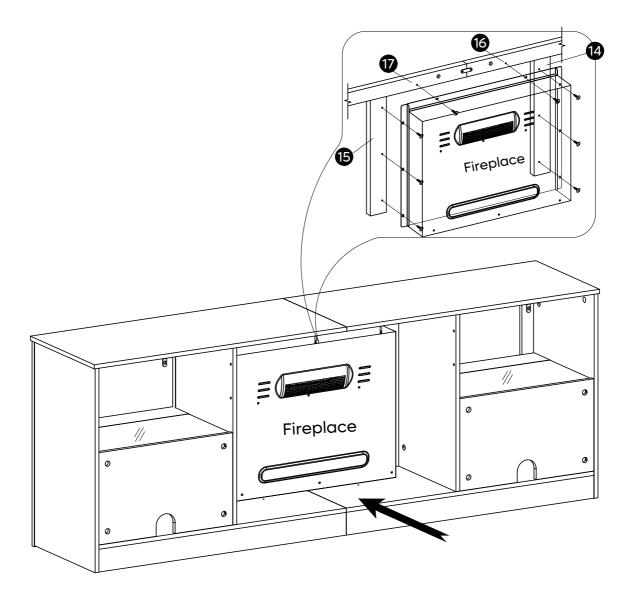


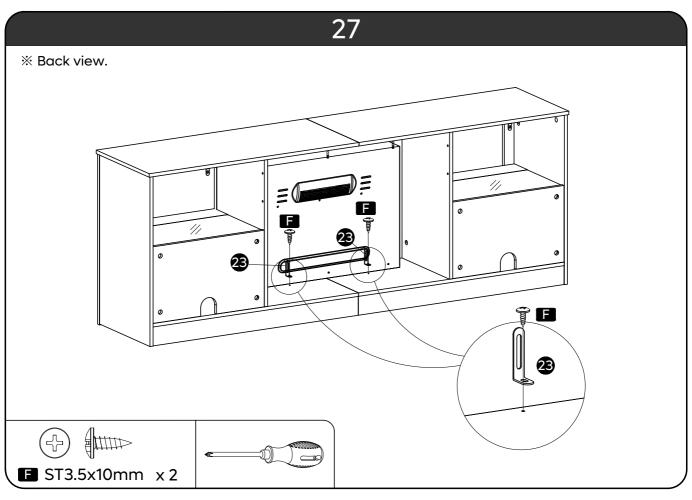

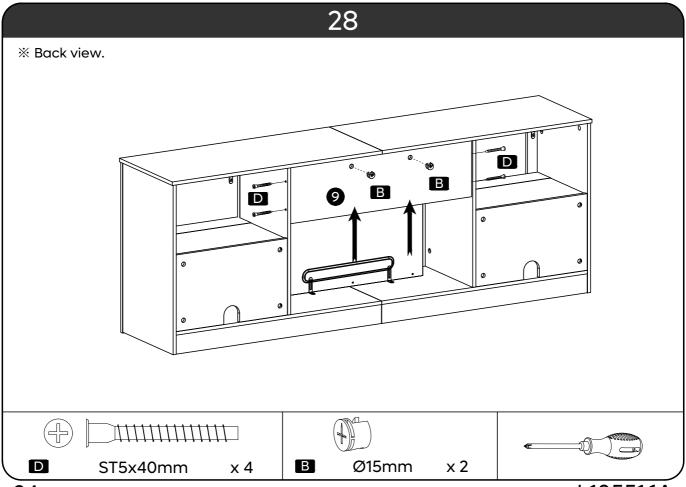


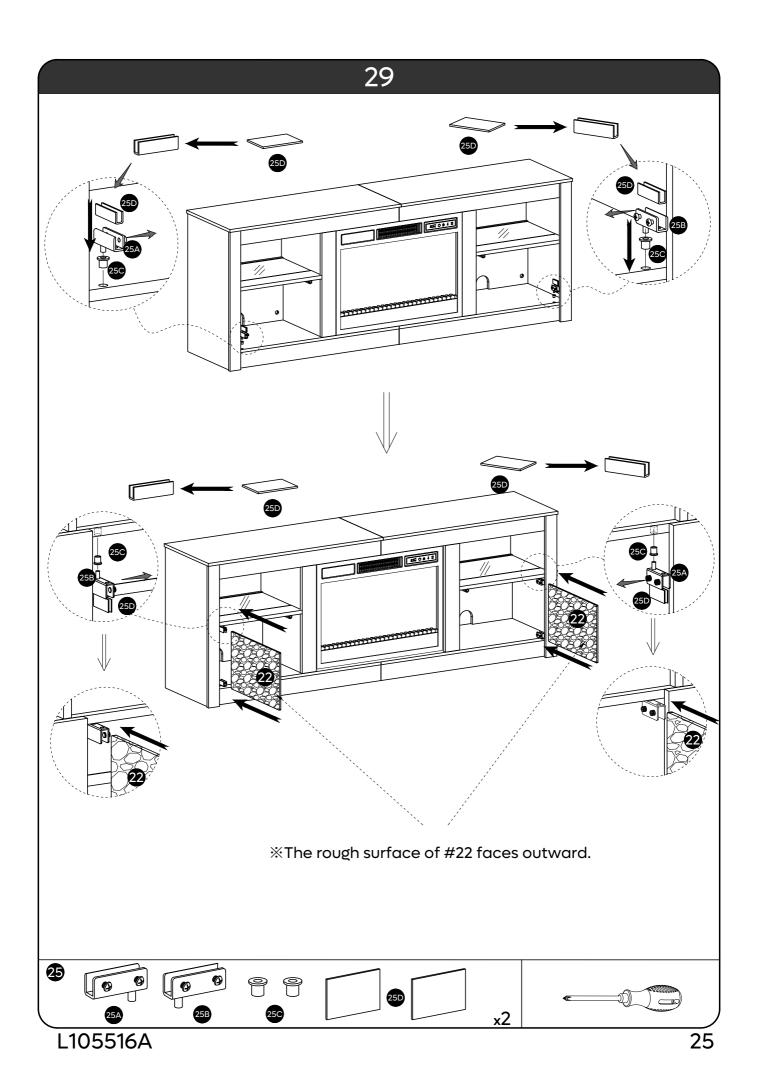

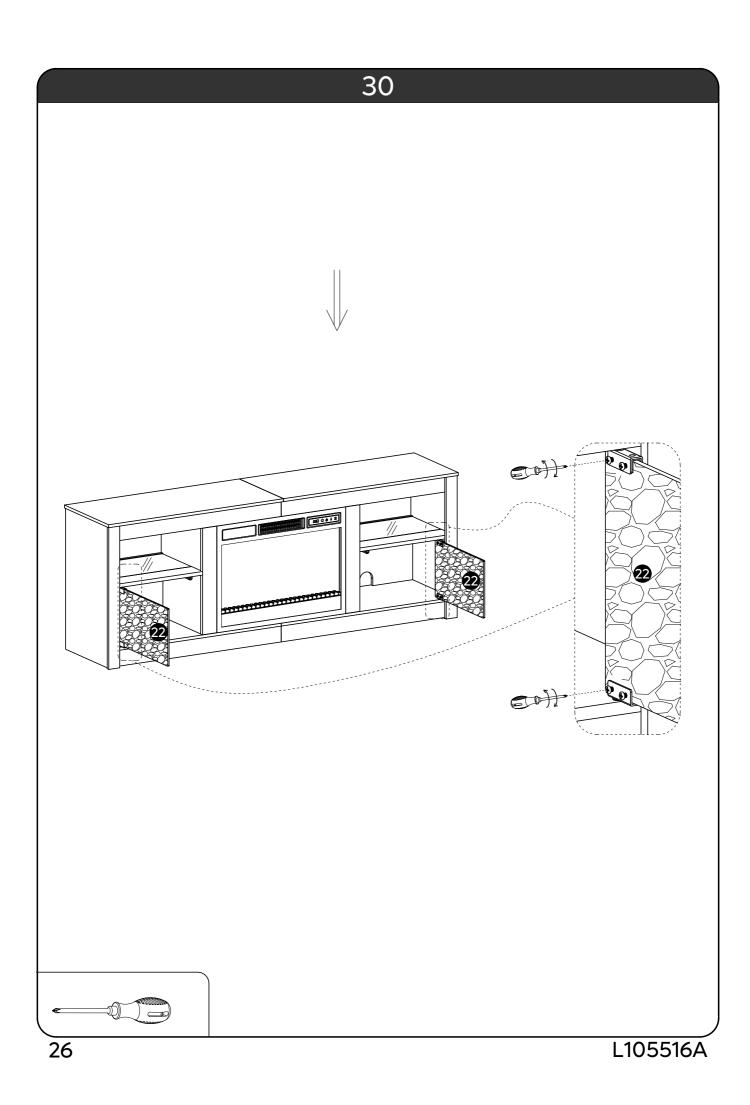


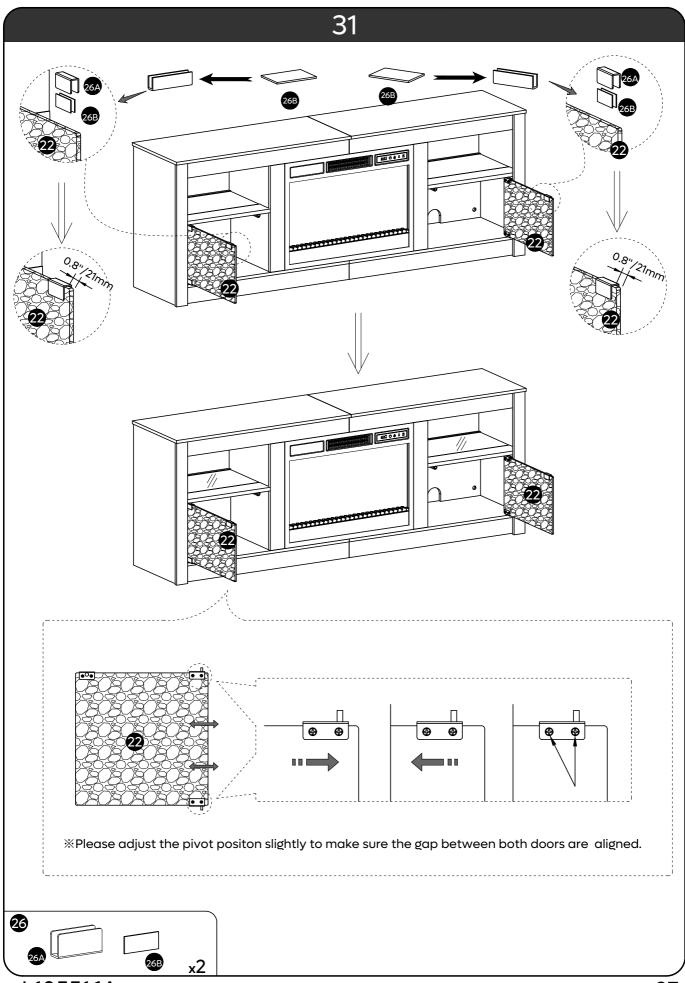


% Back view.

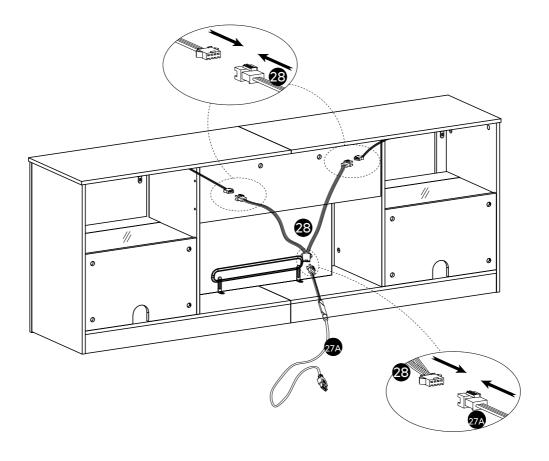



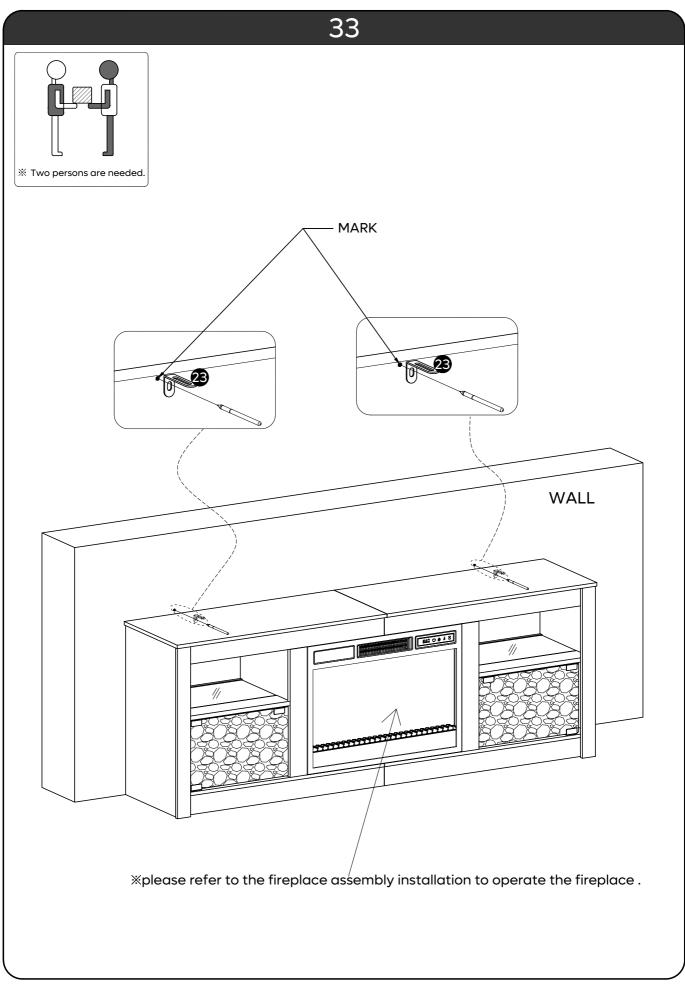

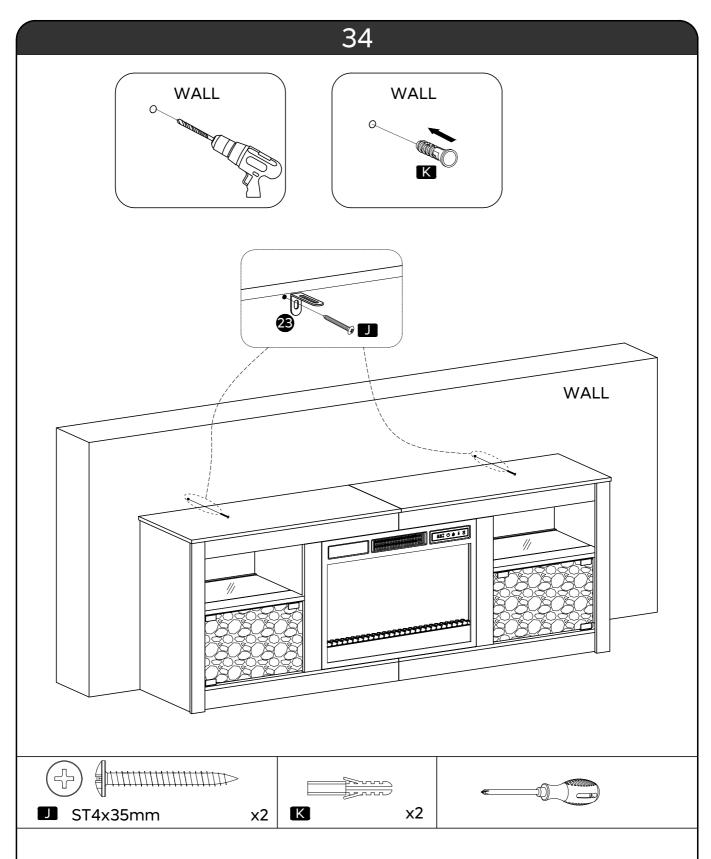

XPlease fasten this item to wall for protection and safety.

- 1. Drill 2 holes in the wall and insert "K" into holes.
- X You may need to use rubber mallet for tapping "K".
- 2. Use "J" to attach "K" with "23".