
JZQ1600-2

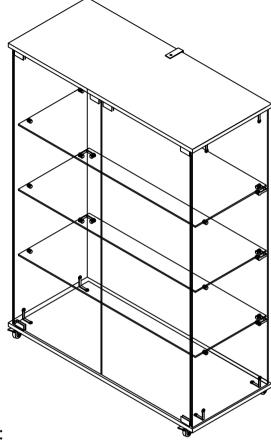


Important Note:


*Place all parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched.

*Kindly follow the assembly instruction step by step.


*Don't tighten all screws until the table is fully set-up.

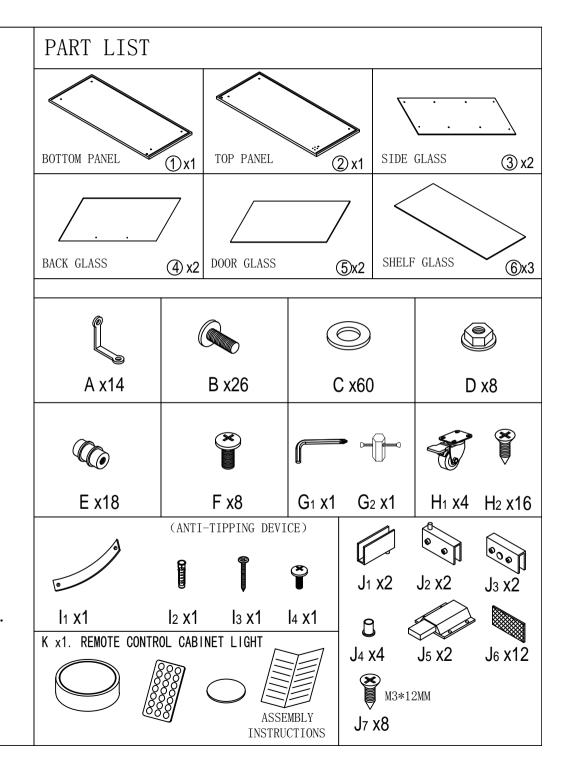


TWO PEOPLE REQUIRED FOR ASSEMBLY

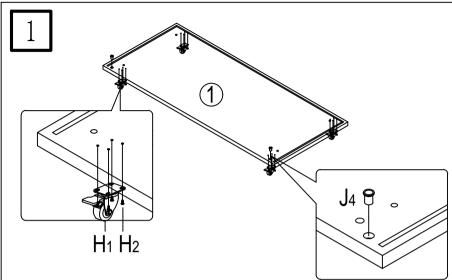


Attach the wheel parts [H] to [1] base plate. Attach the door holder [J4] to the [1] base plate.

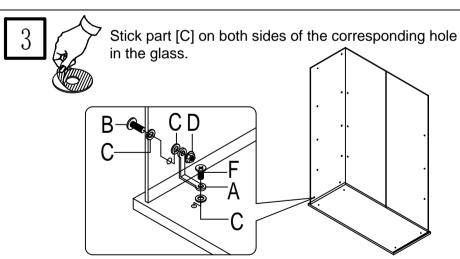

Align Fixing Parts [A] into the screw hole of the base plate[1], Temporarily tighten with screws [F]. Use screws [B],washers [C], nuts [D] in order in the hole (lead hole) on the glass (side), temporarily tighten fixing parts [A] and adjust the position. Finally, tighten all screws[B].

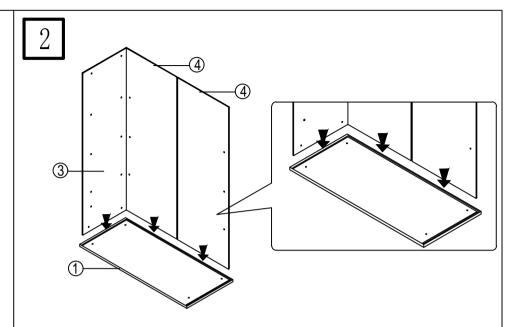


Insert the glass of $[\mathfrak{A}]$ and $[\mathfrak{A}]$ into the groove of $[\mathfrak{A}]$ base plate.

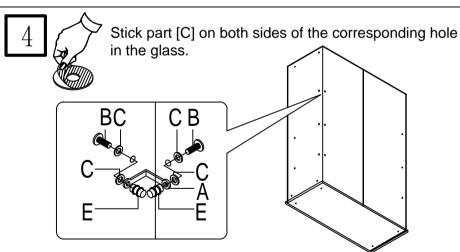



In the screw hole of the glass (side) Fixing parts [A], Temporarily tighten with dowels [E] .

Use screws [B] ,washers [C] , dowels [E] in order to temporarily tighten fixing parts [A] and adjust the position. Finally, tighten all screws [B].

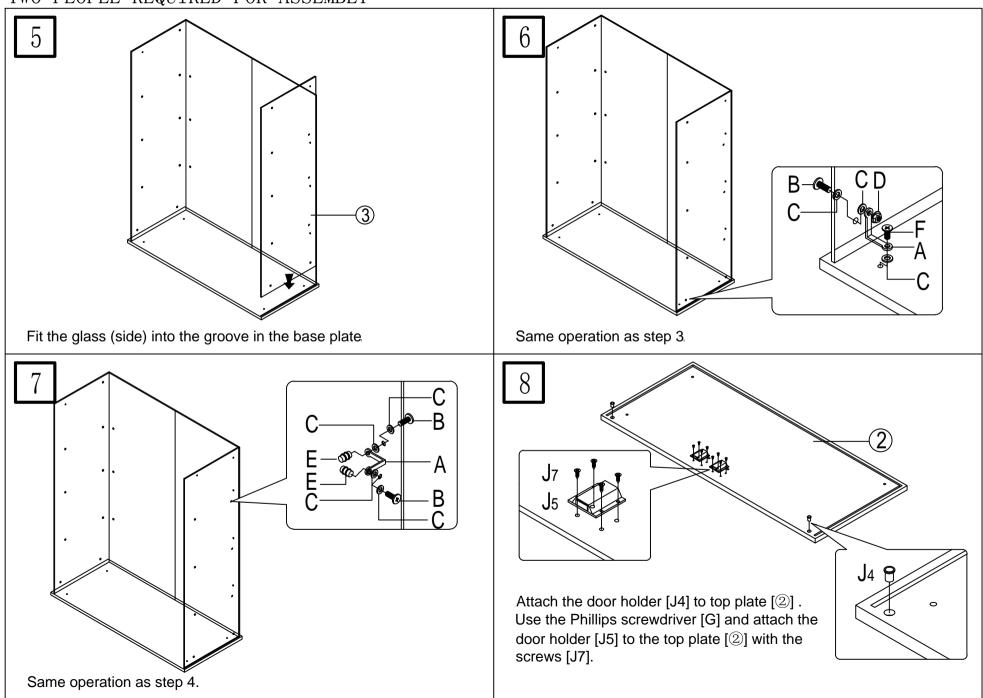



TWO PEOPLE REQUIRED FOR ASSEMBLY

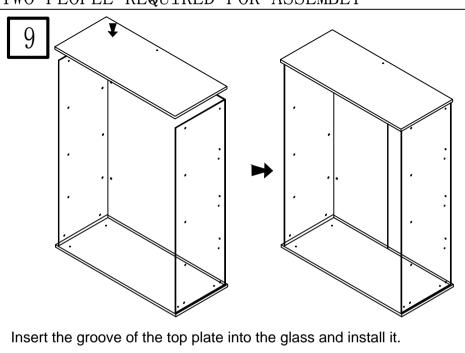

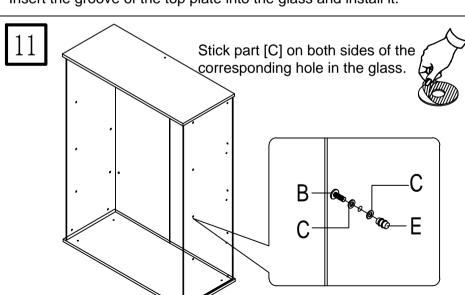


Use the washer [C] screws [B] to install the dowel [E] into the hole open on the side (lead hole).

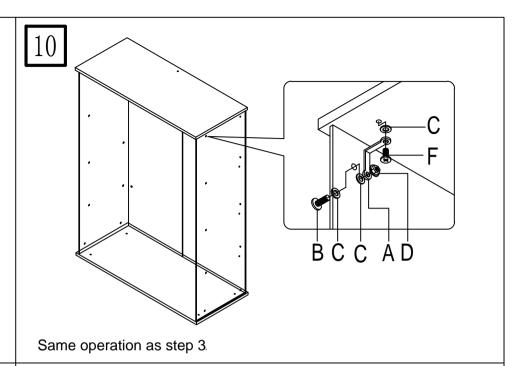

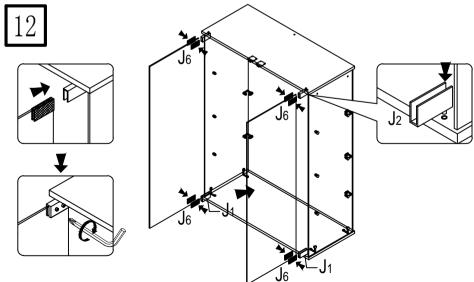


Door receiving metal fitting (lower part) [J1] cushion [J6] and Door receiving metal fitting (upper part) [J2] cushion [J6] Slide and insert, tighten screws to fix.

TWO PEOPLE REQUIRED FOR ASSEMBLY

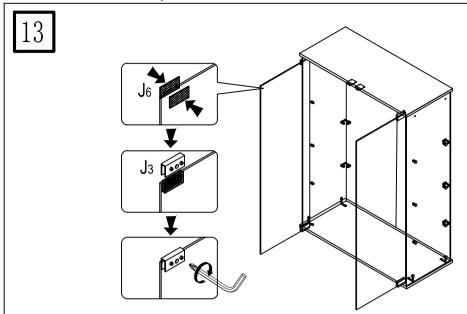


Use magnet [J3] and cushion [J6] to tighten screws to fix.

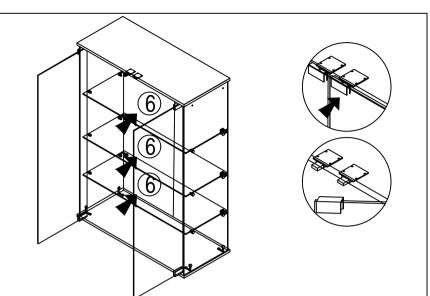

Put the glass shelf board into the main body while tilting it diagonally and place it on the dowel.

Adjust component [J3] to the appropriate position

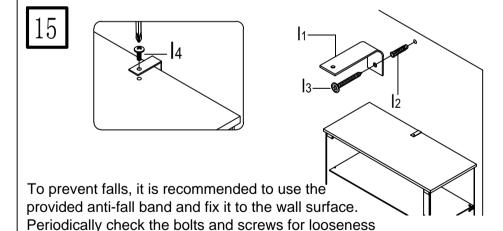

Mark 10mm below the height of the product, install the screw receiver [L2] on the wall, Secure the fall prevention band [L1] with screws [L3].

and re-tighten them if they are.

Place the product on the wall while pulling the attached anti-fall band [L1] upward and fix it to the top plate with screws [L4].

Check all screws for looseness and you're done.

**To balance and tilt the opening and closing of the glass (front screen), tighten the screws on the door support fitting (upper and lower parts), Please adjust the insertion position and adjust it.

**When moving products, please be sure to do so with two or more people.

Also, to prevent damage, please take the displayed collection out of the case and remove the glass shelf board before moving it.

Use remote control for on/off control, dimming and setting operation duration.



