


ITEM :663-1P-BK-8NT

 **INNOVATIONS LIGHTING**
CREATIVITY MEETS EVOLUTIONARY DESIGN®

DESIGN COPYRIGHT – 29/06/2021



ALL RIGHTS RESERVED AND MAY
NOT BE DUPLICATED WITHOUT OUR
WRITTEN PERMISSION

Adjust the wire to demand
length by adjusting the plastic
cable piece.

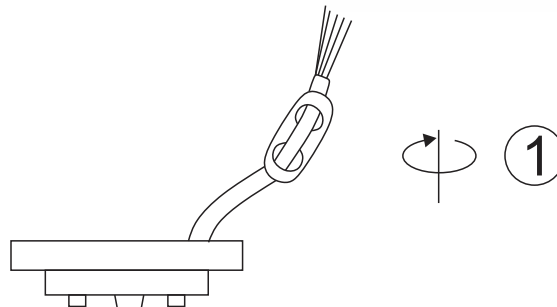


NOTE: This fabric cord is intended to have natural curves. However, if you prefer it to look straighter, you can follow these directions:

Bends in corded pendants are normal. If a heavy shade is being used, the cord will tend to strengthen more over time. To speed up the process, adding heat to the cord will often help. This can be accomplished with a hair dryer, a heat gun on a low setting to avoid burning the fabric or using a 100-watt incandescent bulb for a period rather than an LED.

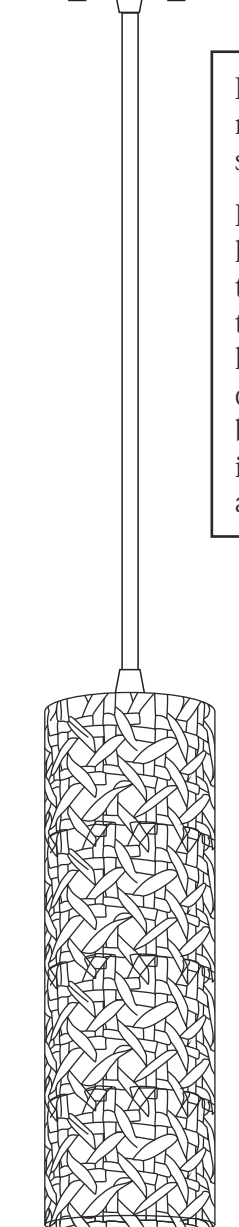

STANDARD MOUNTING PLATE INSTALLATION INSTRUCTIONS

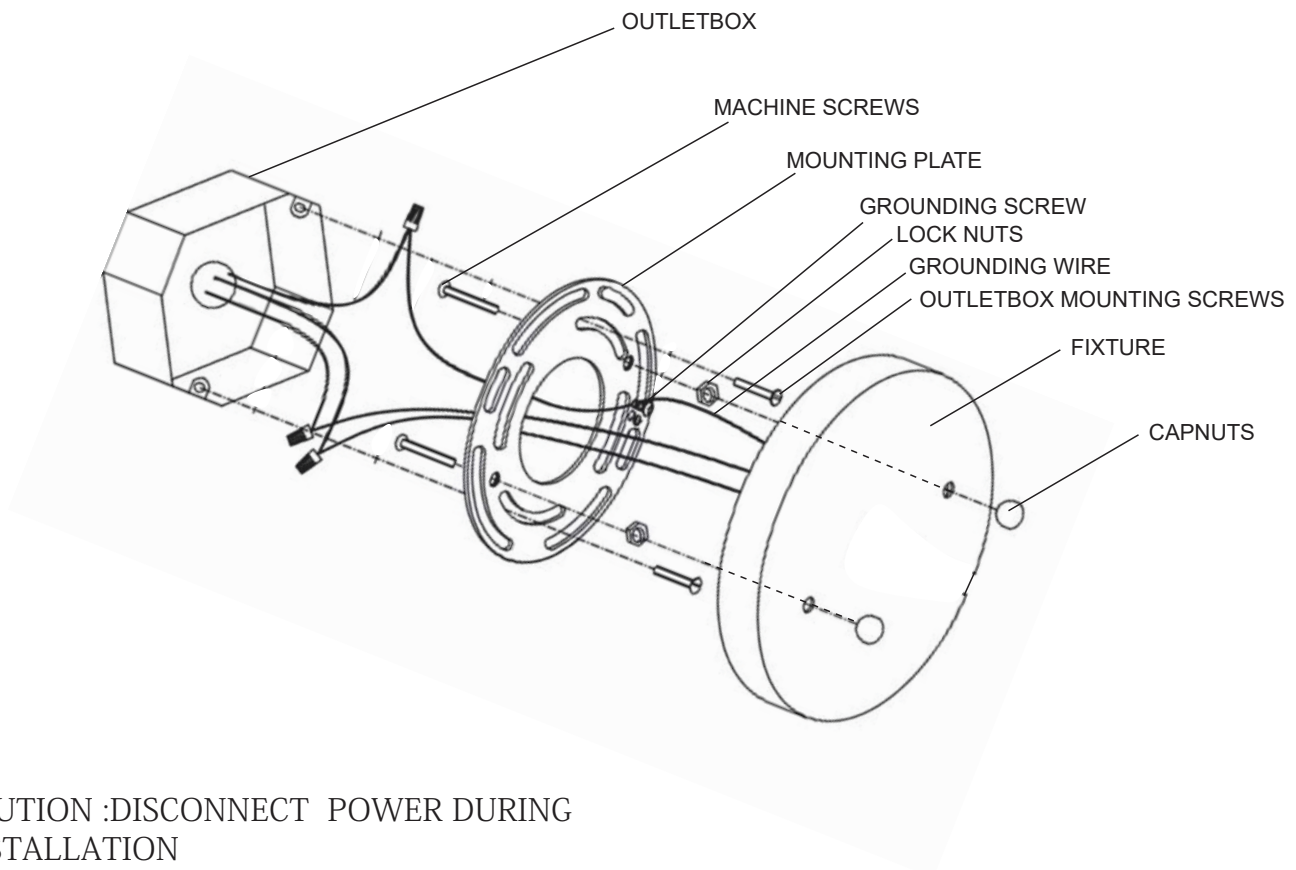

CAUTION :DISCONNECT POWER DURING INSTALLATION

1.) If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.

2.) Thread the machine screws into the opposite side of the mounting plate from the green ground screw, lock the machine screws into place with lock nuts.

3.) Fasten the mounting plate to the outlet box using the two screws supplied with the outlet box.

4.) Spread the electrical wires so that the black wires are on one side of the outlet box and the white wires are on the other side.

5.) Grounding instructions:

A.) On fixtures where mounting plate is provided with a green ground screw and two raised dimples, Wrap ground wire from outlet box around green ground screw and tighten.

B.) On fixtures where mounting plate is provided with a green ground wire attached. Connect mounting plate ground wire to ground wire from outlet box with wire connector (not provided).

If fixture is provided with ground wire, Connect fixture ground wire to ground wire from outlet box with wire connector (not provided). After following the above steps. Never connect ground wire to black or white power supply wires.

6.) To make electrical connections: Connect the white wire(s) from the fixture to the white wire of this outlet box. Connect the black wire(s) from the fixture to the black wire of the outlet box. NOTE: Black outlet box wire may be red, round & smooth and/or have copper conductor. White outlet box wire may be square & ridged and/or have a silver conductor.

7.) Place fixture against mounting surface allowing the machine screws to pass through the fixture cover plate. Secure with cap nuts.