


Remote control manual for variable frequency fan light

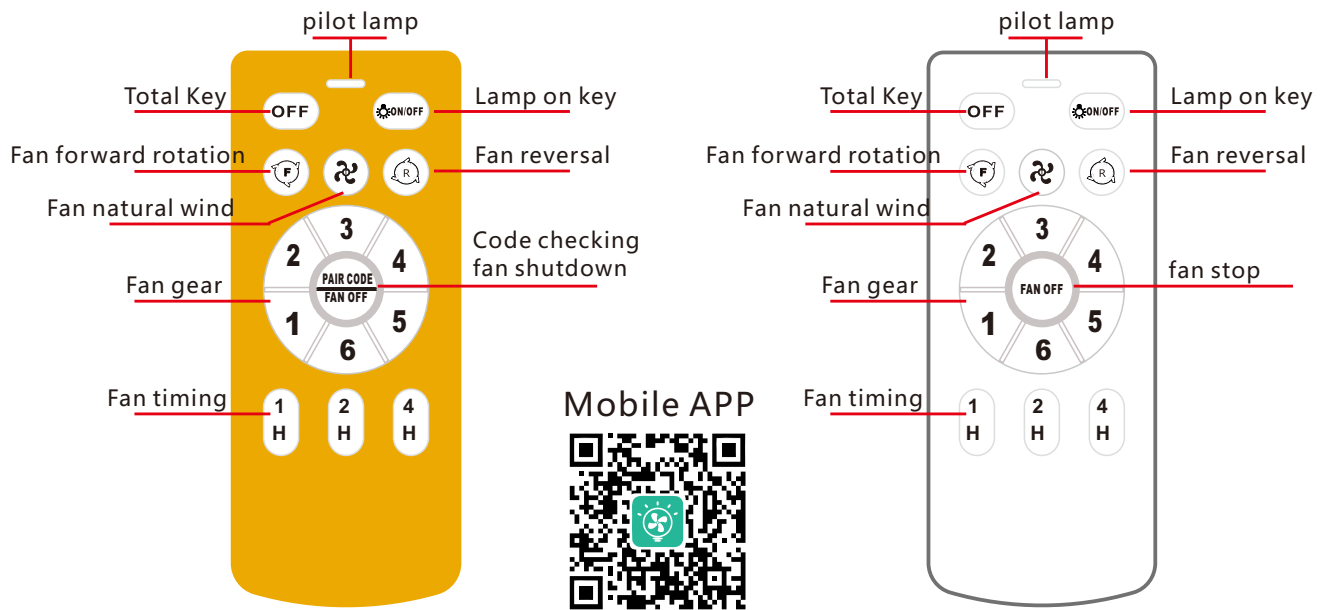

Scan and download the app

433 Code pairing: Turn on the power switch, hear a beep, and press and hold the "2nd gear and 2 hours" button for 3 seconds. The receiver emits a beep, indicating successful code pairing. If the code is not successfully matched, please turn off the power and wait for 1 minute to repeat the above operation.

2.4G code matching: Turn on the power switch, hear a beep, and press and hold the "fan stop" button for 3 seconds. The receiver will emit a beep, and the code matching is successful. If the code is not successfully matched, please turn off the power and wait for 1 minute to repeat the above operation.

The mobile app only supports 2.4G products and does not support 433 products.

When the remote control cannot be effectively controlled: please check the battery; Please remove the battery when not in use for a long time.

Precautions:

1. The receiver should not be installed upside down to avoid affecting the unevenness of the outer cover and the ceiling;
2. It is strictly prohibited to switch the input and output wiring of the receiver between input and output;
3. Please refer to the wire color and the instructions on the sleeve for wiring;
4. When using the remote control, please check if the battery is installed correctly (pay attention to the positive and negative battery). The indicator light on the handle control button will flash once every time it is pressed.

