
Assembly Instructions

Caution: You must read this before you proceed

Care & Maintenance





Do not put hot items directly on furniture surface.

Do not clean furniture with harsh cleansers or polish.

Do not place furniture under direct sunlight.

Do not place furniture near heating or cooling vents.

 Do not write on furniture without a padded barrier to protect the surface.

Do not place furniture outside . For indoor use only.


 Stains may be removed with mild soap solution and damp cloth.

Children should not climb or jump on the furniture.

 Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in Sectionals for hardware packs and legs. Sets often ship in multiple boxes and may arrive a day or two apart.

SECTIONALS

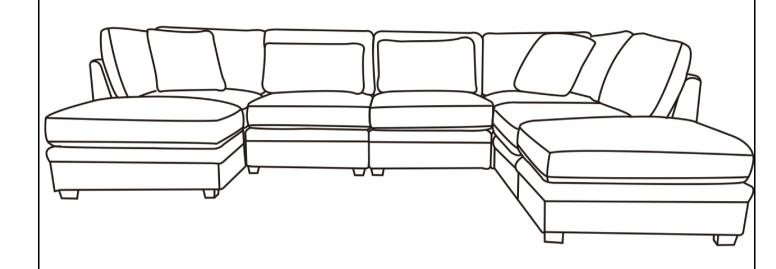

Parts List			
Label	Picture	Description	QTY
Α		Left Seat Board	1
В		Right Seat Board	1
С		Middle Seat Board	3

D	Footrest	2
E	Headrest	3
F	Lumbar Pillow	2
G	Left Headrest	1
Н	Right Headrest	1
I	Small Cushion	2

J		Foot Mat	2
K		Seat Cushion	4
L		Leg	28
М		Left Armrest	1
N		Right Armrest	1
O	0 0	Backrest	4

Р		Wooden Backrest	1	
Q		Left Side Cushion	1	
R		Right Side Cushion	1	
S		Velcro	6	
Т		Corner Seat Cushion	1	
Hardw	Hardware			
Label	Picture	Description	QTY	
1)		Single Head Screw(M8×60mm)	53	
2		Spring Shims(M8)	31	

-			
3		Gaskets(M10×25)	34
4		Single Head Screw(M8×90mm)	7
5		Allen Wrench(M8)	1
6		Metal Pins	2
7		Nut(M8)	4
8		Wrenches	1
Assembly Preparation			
Before Beginnin g Assembly :	E×3 F×2 G×1	Q1	R×1 8×1



Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




Assemble on a clean non-marring surface (packing foam)-



Save all packaging until finished-

Assembly Steps

Overview

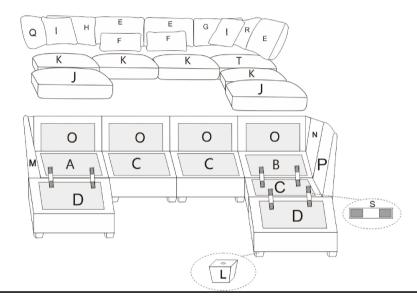

This Sectionals has multiple parts and may require up to some 60 minutes to assemble.


To give you an overview of the Sectionals parts, the above picture is to help you put the various parts into perspective.

Please read through the instructions below to familiarise yourself with the parts and steps before assembly.


Note: It is recommended that you have an adult partner to assist during the entire assembly process.

Step 1 Cardboard box 4-1 Cx2 Kx2 Fx2 Ex2


Remove Middle Seat Board (C), Seat Cushion (K), Lumbar Pillow (F), Headrest (E), Backrest (O), Leg (L) from the cardboard box and place on a flat, clean surface free of dents.

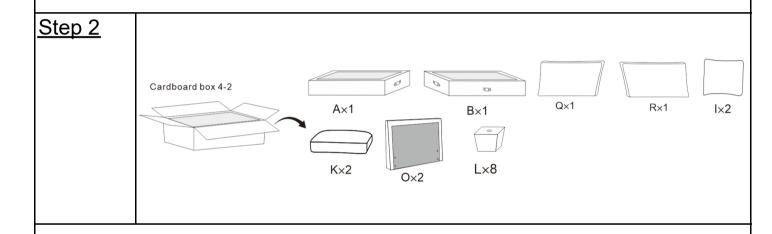


Remove Left Seat Board (A), Right Seat Board (B), Left Side Cushion (Q), Right Side Seat (R), Small Cushion (I), Seat Cushion (K), Backrest (O), Leg (L) from the cardboard box and place on a flat, clean surface free of dents.

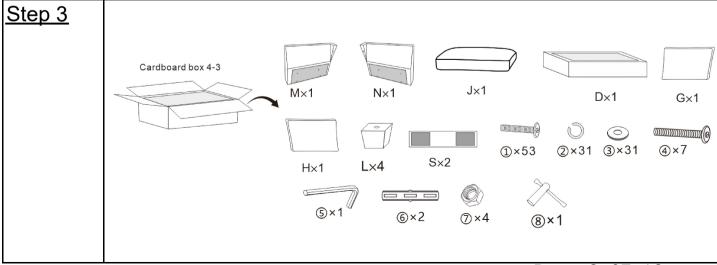

Remove Left Armrest (M), Right Armrest (N), Foot Mat (J), Footrest (D), Left Headrest (G), Right Headrest (H), Leg (L), Velcro (S), Single Head Screw (1), Spring Shims (2), Gaskets (3), Single Head Screw (4), Allen Wrench (5), Metal Pins (6), Nut (7) and Wrenches (8) from the cardboard box and place on a flat, clean surface free of dents.

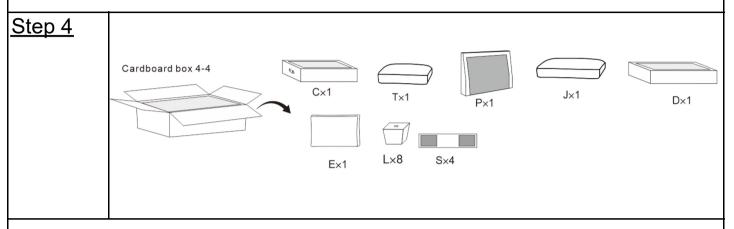


Remove Middle Seat Board (C), Corner Seat Cushion (T), Wooden Backrest (P), Foot Mat (J), Footrest (D), Headrest (E), Legs (L), Velcro (S) from the cardboard box and place on a flat, clean surface free of dents.

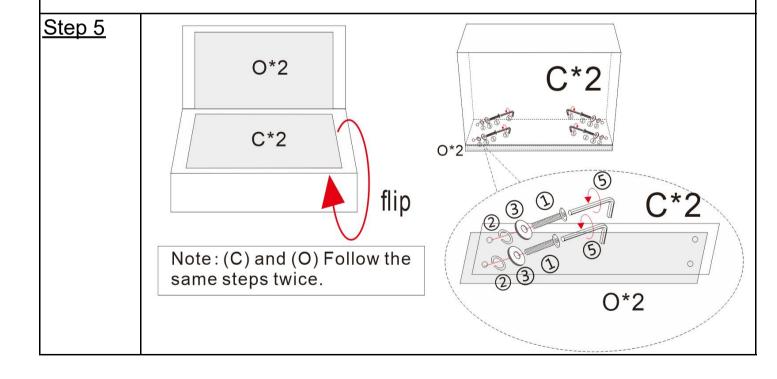

Align Backrest (O) with Middle Seat Board (C) and flip it upside down. Align the holes at the bottom, and use Allen Wrench (5) to lock Spring Shims (2), Gaskets (3) and Single Head Screw (1) together in sequence. Tighten Single Head Screw (1) in this step. Repeat the same steps for both Middle Seat Board (C) and Backrest (O).


Step 6

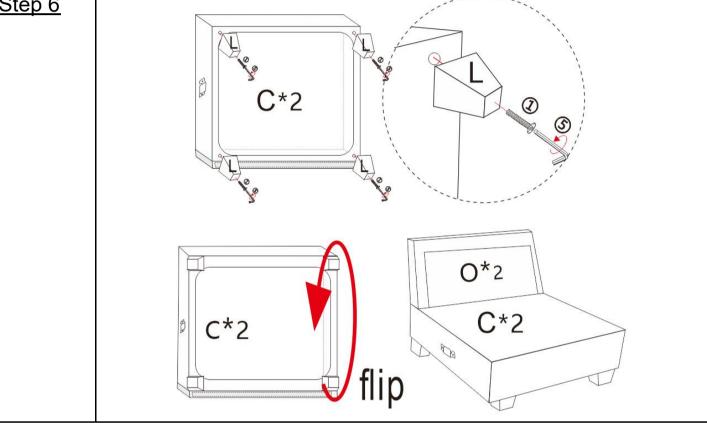


Align the holes on all four sides of the two Middle Seat Board (C) with the Legs (L) after installing the Backrest (O), and use a Allen Wrench (⑤) to secure the Legs (L) and Single Head Screw (1) in order. Tighten the Single Head Screw (1) in this step. Finally, place the installed seat flat on the ground.

Repeat the same steps for both Middle Seat Board (C).

Step 7

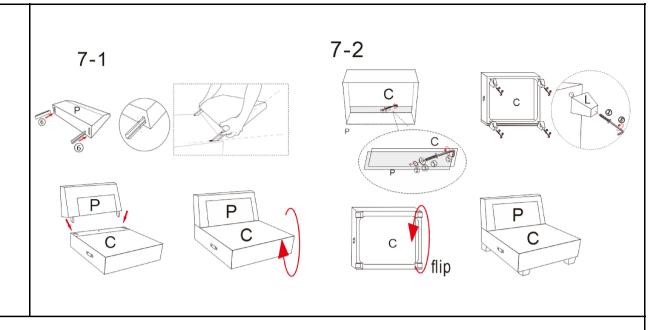


7-1:Insert Metal Pins (⑥) into Wooden Backrest (P), then tilt Wooden Backrest (P) while supporting it with both hands and insert it into the two holes in Middle Seat Board (C). Turn Middle Seat Board (C) over with Wooden Backrest (P) attached until it reaches the bottom.
7-2:Align the holes at the base of Middle Seat Board (C) with Wooden Backrest (P), then use Allen Wrench (⑤) to install Spring Shims (②), Gaskets (③), and Single Head Screw (①) in sequence, tightening them securely. Next, align Leg (L) with the holes at the base of Middle Seat Board (C) and use Allen Wrench (⑤) to tighten Single Head Screw (①) firmly. This step completes the tightening of the screws.

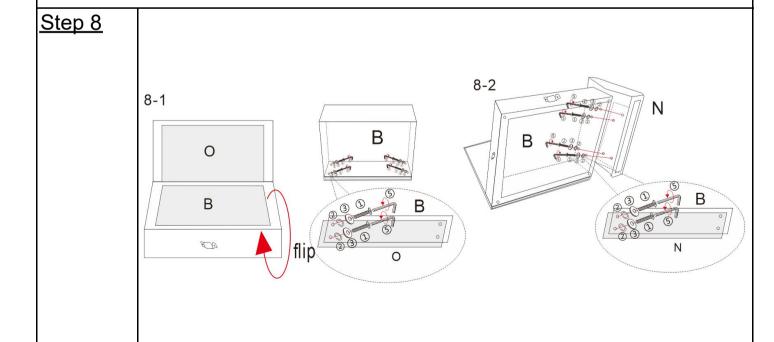

8-1: Align the Backrest (O) with the Right Seat Board (B), then flip it over. Align the holes at the bottom and use a Allen Wrench (⑤) to tighten the Spring Shims (②), Gaskets (③), and Single Head Screw (①) in sequence. Tighten the Single Head Screw (①) in this step.

8-2: Align the holes on the Right Armrest (N) with the holes on the side of the Right Seat Board (B), then use a Allen Wrench (⑤) to tighten the Spring Shims (②), Gaskets (③), and Single Head Screw (①) in sequence. Tighten the Single Head Screw (①) in this step.


Step 9

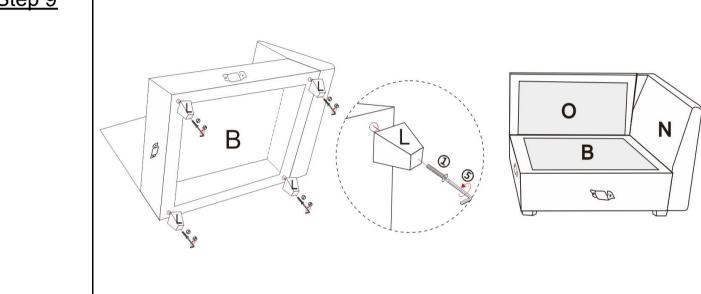

Lay Right Seat Board (B) flat, align Leg (L) with the holes at the bottom of Right Seat Board (B), and use Allen Wrench (⑤) to tighten Single Head Screw (①). This step tightens Single Head Screw (①).


Step 10 10-1 A 10-2 M A flip O M M

- 10-1: Align Left Seat Board (A) with Backrest (O) and flip it over, aligning the holes at the bottom, and use Allen Wrench (⑤) to tighten Spring Shims (②), Gaskets (③) and Single Head Screw (①) in order. Tighten Single Head Screw (①) in this step.
- 10-2: Align the hole on the right side of Left Seat Board (A) with Left Armrest (M), and use Allen Wrench (⑤) to tighten Spring Shims (②), Gaskets (③) and Single Head Screw (①) in order. This step will tighten Single Head Screw (①).

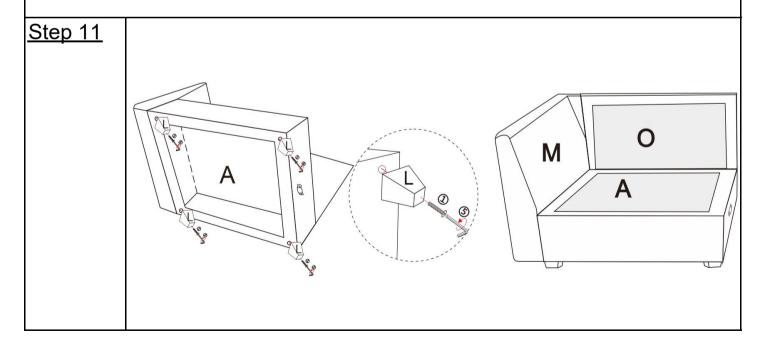


Lay Left Seat Board (A) flat, align Leg (L) with the holes at the bottom of Left Seat Board (A), and use Allen Wrench (⑤) to tighten Single Head Screw (①). This step tightens Single Head Screw (①).

<u>Step 12</u>

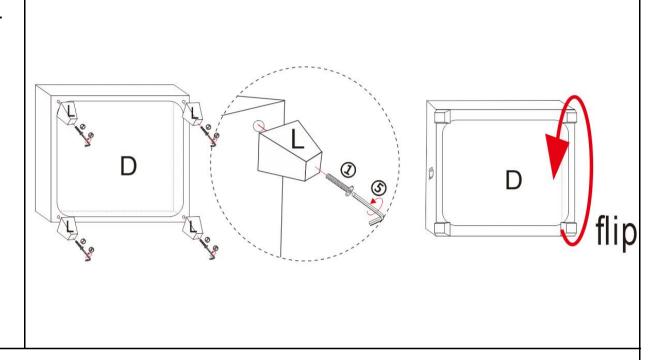

Lay Footrest (D) flat, align Leg (L) with the holes at the bottom of Footrest (D), and use Allen Wrench (⑤) to tighten Single Head Screw (①). This step tightens Single Head Screw (①).

Repeat the same steps for the two Footrest (D) parts.

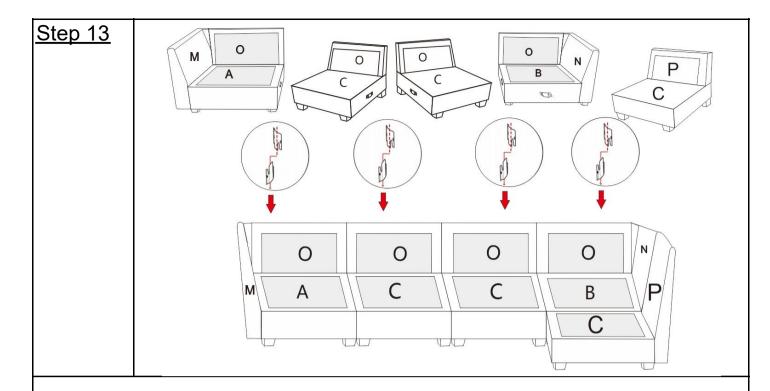


Align Left Seat Board (A) with Middle Seat Board (C), align Middle Seat Board (C) with Middle Seat Board (C), align Middle Seat Board (C) with Right Seat Board (B), then align Right Seat Board (B) with Middle Seat Board (C), and finally fasten the buckle to secure.


NOTE:

- 1. Insert only half of the hardware into the arm frame or backrest frame box. Do not insert completely.
- 2. Gently press down on your fingers to prevent the hardware from falling out.
- 3. At an angle of approximately 45 degrees, first align the hardware with the gap in the seat box.
- 4. Once the holes are aligned, hold it vertically down vertically and press with both hands at the same time.

<u>Step 14</u>

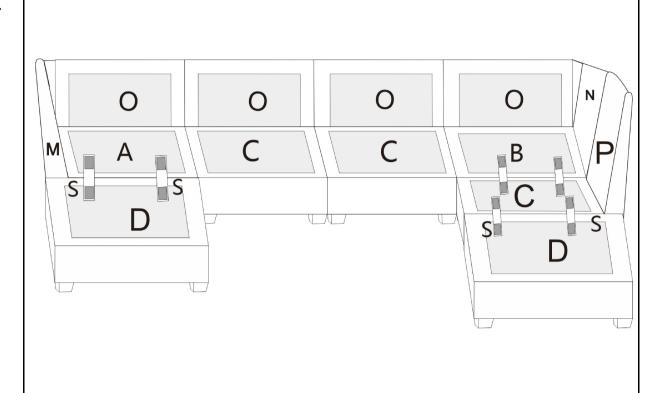


Use Velcro (S) to link Footrest (D) to Left Seat Board (A), and follow the same steps for Right Seat Board (B) and Middle Seat Board (C), Footrest (D) and Middle Seat Board (C).

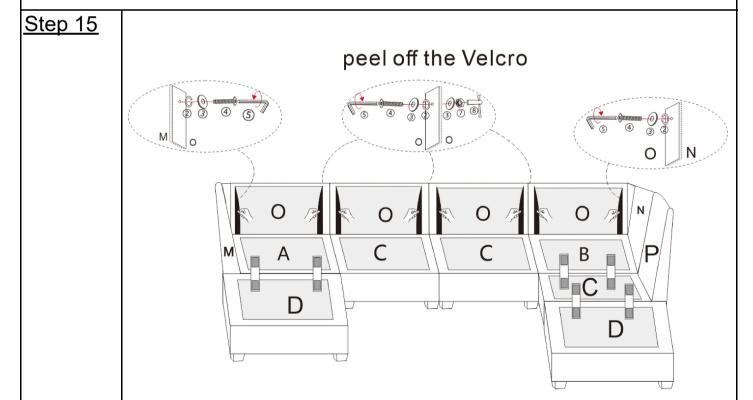


Unfasten the Velcro on both sides of Backrest (O) to align the holes with Left Armrest (M), then use Allen Wrench (⑤) to tighten Single Head Screw (④), Spring Shims (②) and Gaskets (③). This step will tighten Single Head Screw (④). The installation sequence for Backrest (O) and Right Armrest (N) is the same as above.


Align the holes between Backrest (O) and Backrest (O), then insert Gaskets (③), Spring Shims (②) and Single Head Screw (④) into the holes in sequence. Screw Nut (⑦) and Gaskets (③) sequentially onto the opposite end of the Single Head Screw (④), then use the tool Wrenches (⑧) to tighten Nut (⑦). Repeat the remaining two steps as described above.

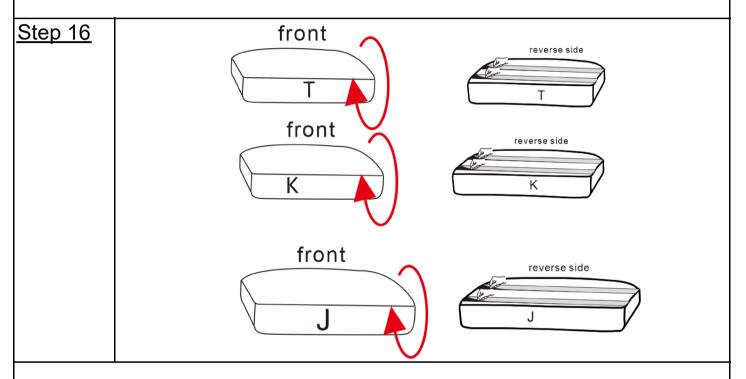

Peel off the Velcro strips behind Seat Cushion (K) and Foot Mat (J).

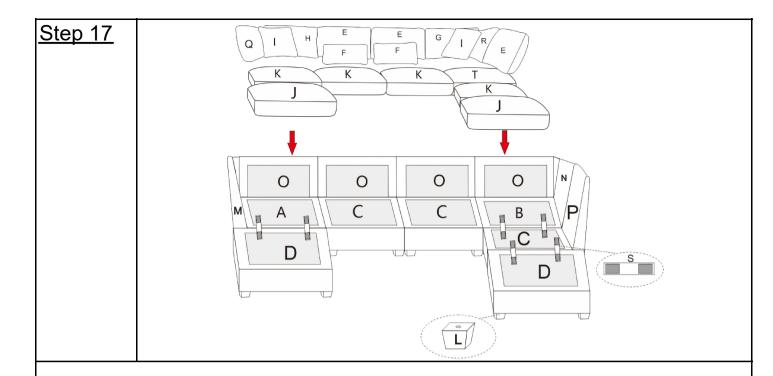

Place Left Side Seat (Q), Small Cushion (I), Lumbar Pillow (F), Right Headrest (H), Headrest (E), Left Headrest (G), Right Side Seat (R), Seat Cushion (K), Corner Seat Cushion (T) and Foot Mat (J) on the sofa.

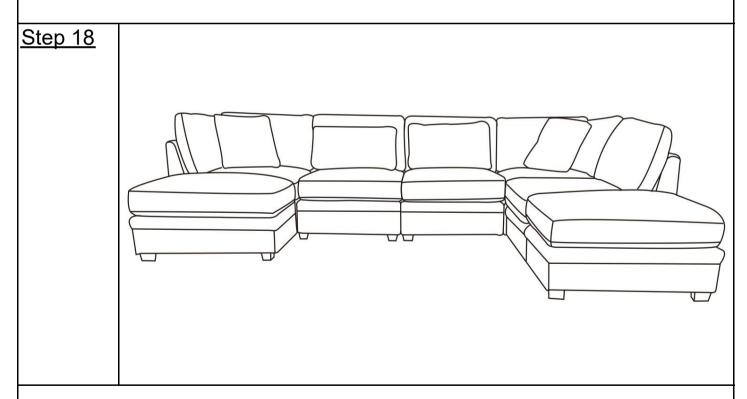

Your sofa is ready for use.

This sofa should only be used on flat, level surfaces.