












Assembly Instructions


Caution : You must read this before you proceed

Care & Maintenance



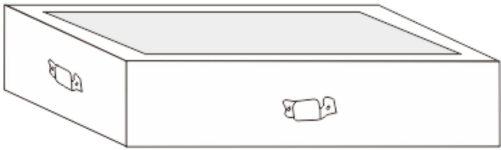
- ⊘  • Not for commercial use. For residential use only.
 - ✓  • Furniture may scratch floors. We recommend using furniture pads to protect your floors.
 - ⊘  • Do not put hot items directly on furniture surface.
 - ⊘  • Do not clean furniture with harsh cleansers or polish.
 - ⊘  • Do not place furniture under direct sunlight.
 - ⊘  • Do not place furniture near heating or cooling vents.
 - ⊘  • Do not write on furniture without a padded barrier to protect the surface.
 - ⊘  • Do not place furniture outside . For indoor use only.
 - ⊘  • Stains may be removed with mild soap solution and damp cloth.
 - ⊘  • Children should not climb or jump on the furniture.
-
- ✓  • Dust and pick-up spills using a clean, non-colored, lint-free cloth.







Please look in Sectionals for hardware packs and legs.
Sets often ship in multiple boxes and may arrive a day or two apart.


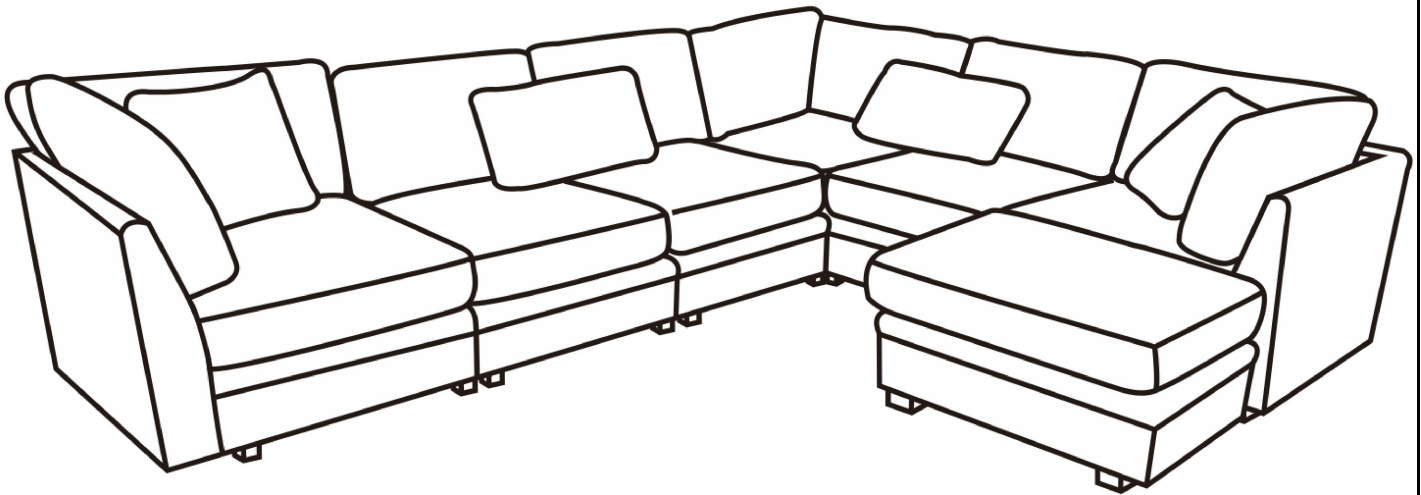



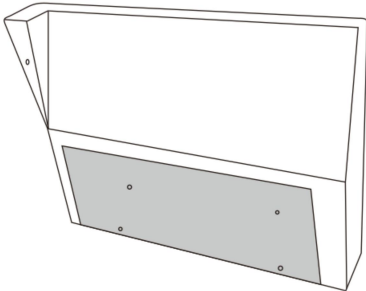
SECTIONALS










Parts List

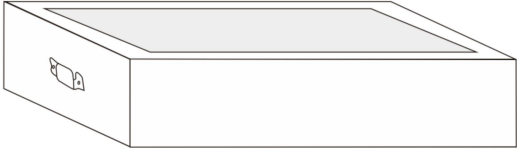Label	Picture	Description	QTY
A		Left Seat Board	1
B		Right Seat Board	1
C		Corner Bottom Frame	1

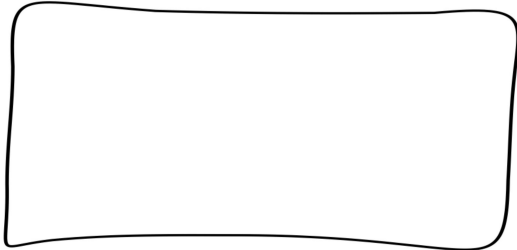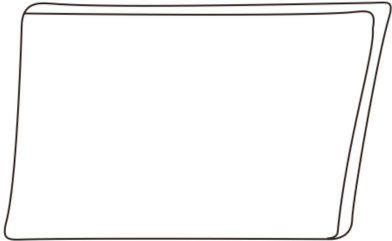





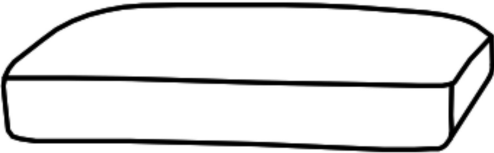
D		Middle Seat Board	3
E		Footrest	1
F		Headrest	3
G		Lumbar Pillow	2
H		Left Headrest	1
I		Right Headrest	1

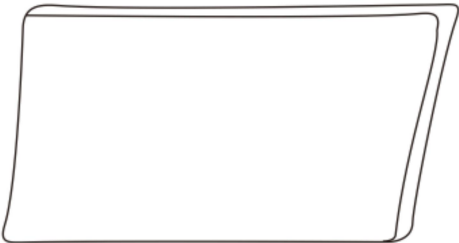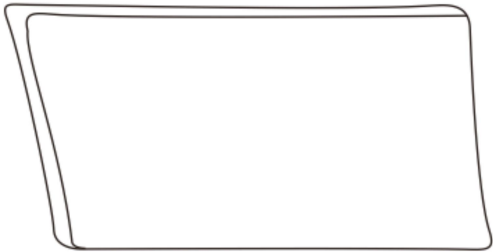J		Small Cushion	2
K		Seat Cushion	5
L		Corner Seat Cushion	1
M		Leg	28
N		Left Armrest	1
O		Right Armrest	1

P		Backrest	5
Q		Left Centre Backrest	1
R		Right Centre Backrest	1
S		Left Back Cushion	2
T		Right Back Cushion	2
U		Velcro	2


V		Foot Mat	1
---	---	----------	---

Hardware

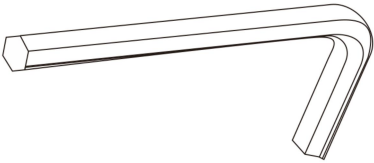Label	Picture	Description	QTY
①		Single Head Screw(M8×60mm)	65
②		Spring Shims(M8)	45
③		Gaskets(M10×25)	45
④		Nut(M8)	7
⑤		Single Head Screw(M8×90mm)	9
⑥		Allen Wrench(M8)	1
⑦		Wrenches	1

Assembly Preparation

Before
Beginnin
g
Assembly
:

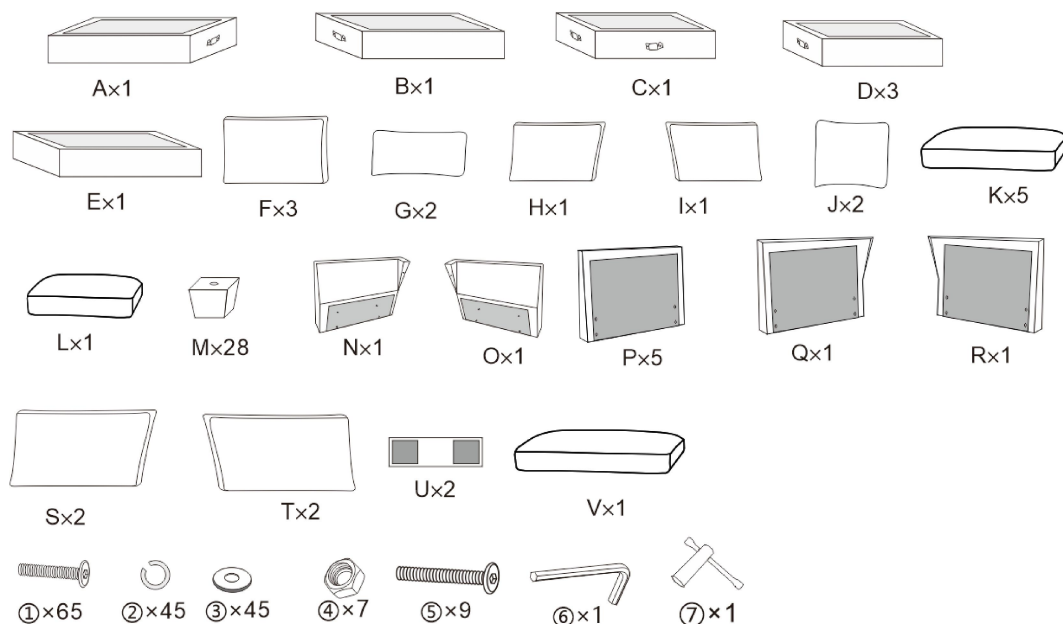

- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-

Assembly Steps

Overview

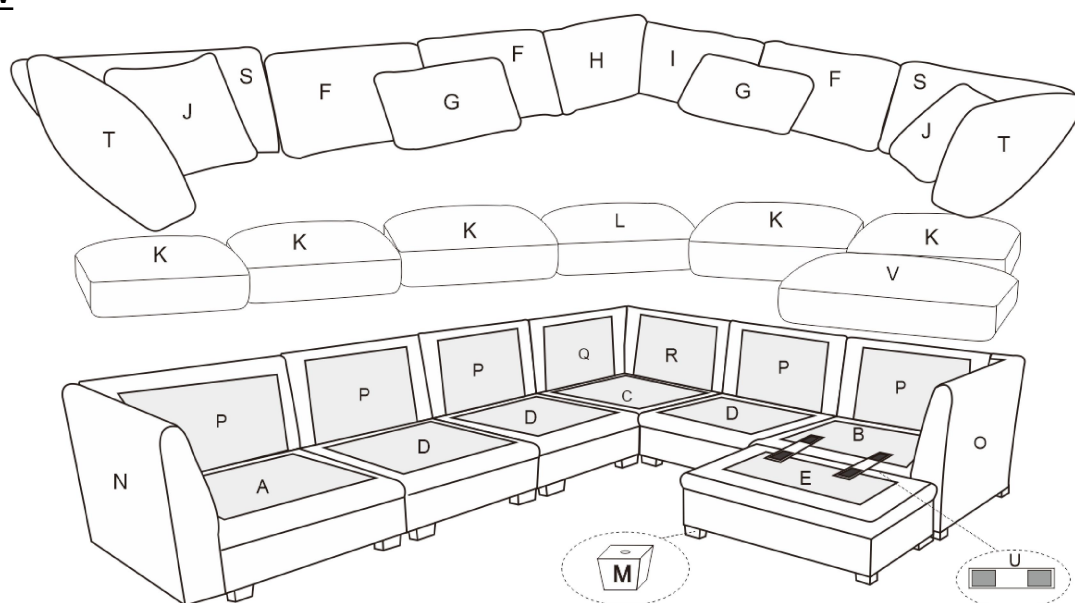


This Sectionals has multiple parts and may require up to some 60 minutes to assemble.

To give you an overview of the Sectionals parts, the above picture is to help you put the various parts into perspective.

Please read through the instructions below to familiarise yourself with the parts and steps before assembly.


Note:It is recommended that you have an adult partner to assist during the entire assembly process.

Step 1

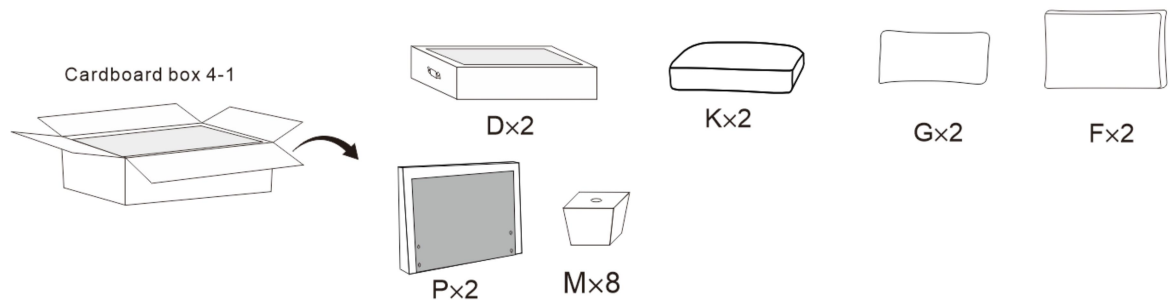


Remove the Middle Seat Board (D), Seat Cushion (K), Lumbar Pillow (G), Headrest (F), Backrest (P), and Leg (M) from carton 4-1, and place them on a clean, scratch-free surface.

Step 2

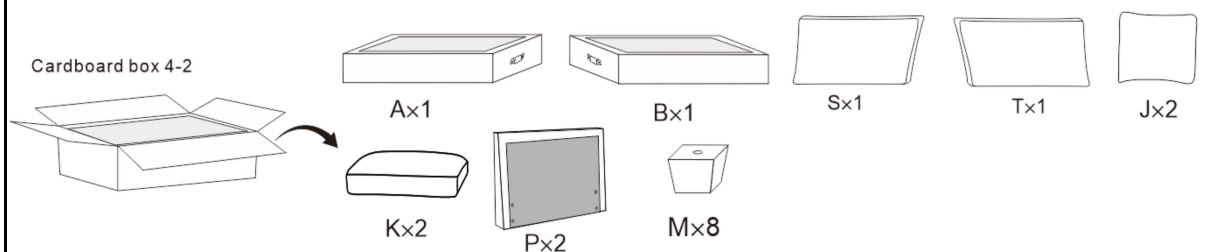


Remove the Left Seat Board (A), Right Seat Board (B), Left Back Cushion (S), Right Back Cushion (T), Small Cushion (J), Seat Cushion (K), Backrest (P), and Leg (M) from carton 4-2, and place them on a clean, scratch-free surface.

Step 3

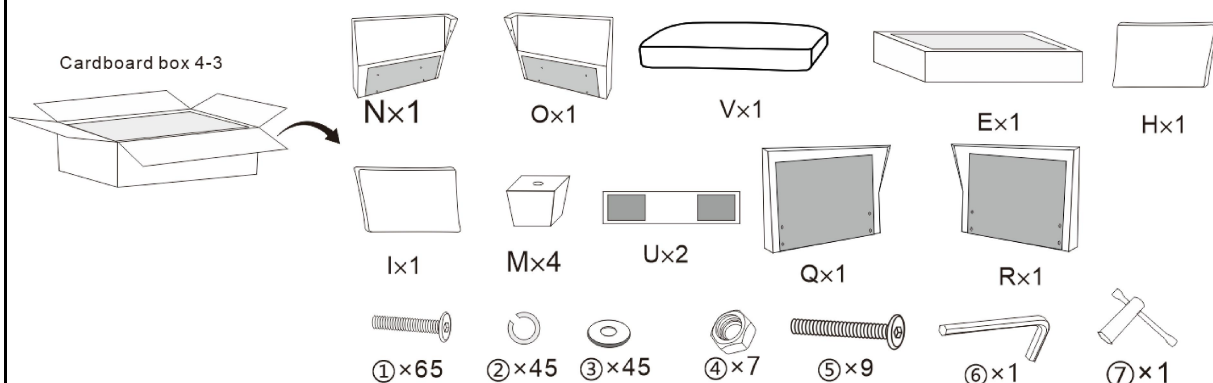


Remove the Left Armrest (N), Right Armrest (O), Foot Mat (V), Footrest (E), Left Headrest (H), Right Headrest (I), Leg (M), Velcro (U), Left Centre Backrest (Q), Right Centre Backrest (R), Single Head Screw (①), Spring Shims (②), Gaskets (③), Nut (④), Single Head Screw (⑤), Allen Wrench(⑥), Wrenches (⑦) from carton 4-3, and place them on a clean, scratch-free surface.

Step 4

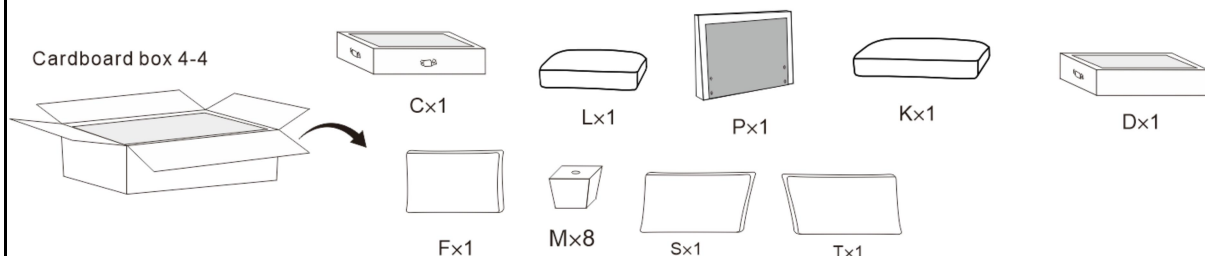


Remove the Corner Bottom Frame (C), Corner Seat Cushion (L), Backrest (P), Seat Cushion (K), Middle Seat Board (D), Headrest (F), Leg (L), Left Back Cushion (S), and Right Back Cushion (T) from carton 4-4, and place them on a clean, scratch-free surface.

Step 5

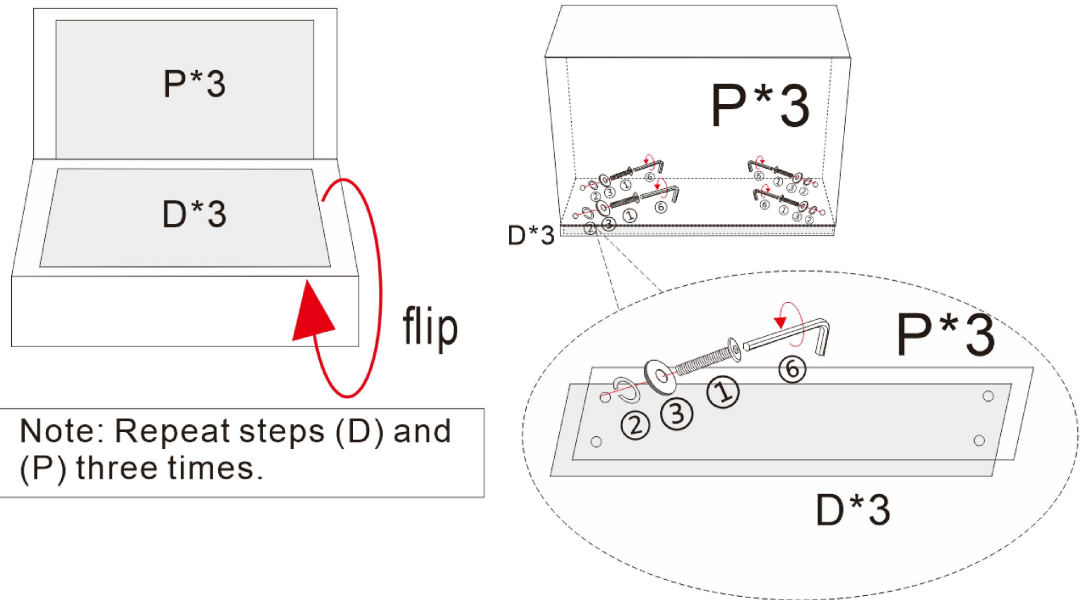


Align Middle Seat Board (D) with Backrest (P) and flip it upside down. Align the holes at the bottom, and use Allen Wrench (⑥) to lock Spring Shims (②), Gaskets (③) and Single Head Screw (①) together in sequence. Tighten Single Head Screw (①) in this step.

Step 6

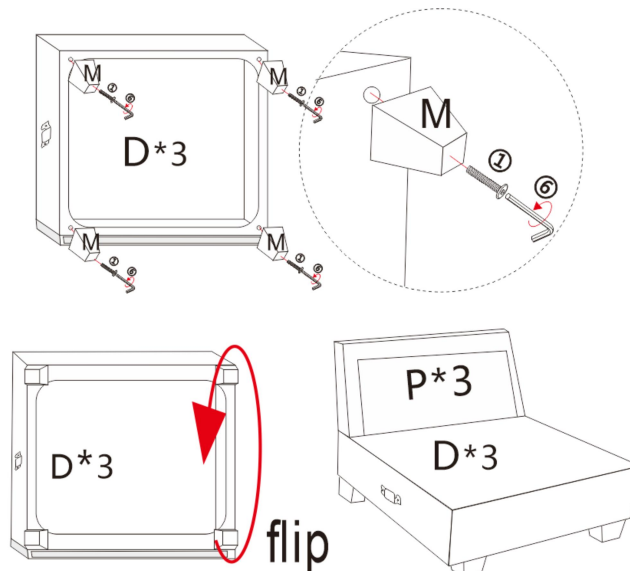

Align the holes on all four sides of the three Middle Seat Board (D) with the Leg (M) after installing the Backrest (P), and use a Allen Wrench (⑥) to secure the Leg (M) and Single Head Screw (①) in order. Tighten the Single Head Screw (①) in this step. Finally, place the installed seat flip on the ground.


Step 7

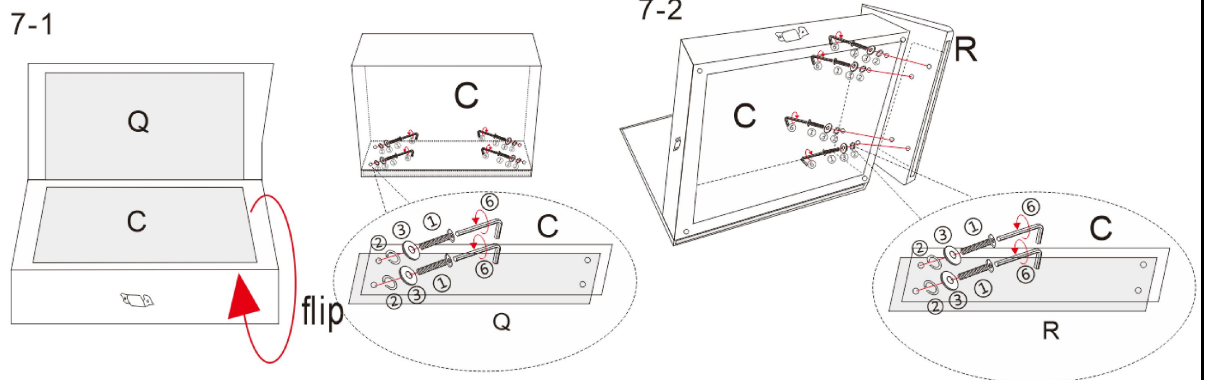

7-1:Align the Left Centre Backrest (Q) with the Corner Bottom Frame (C), then flip it over. Align the holes at the bottom and use a Allen Wrench (⑥) to tighten the Spring Shims (②), Gaskets (③), and Single Head Screw (①) in sequence. Tighten the Single Head Screw (①) in this step.


7-2:Align the holes on the Corner Bottom Frame (C) with the holes on the side of the Right Centre Backrest (R), then use a Allen Wrench (⑥) to tighten the Spring Shims (②), Gaskets (③), and Single Head Screw (①) in sequence. Tighten the Single Head Screw (①) in this step.

Step 8

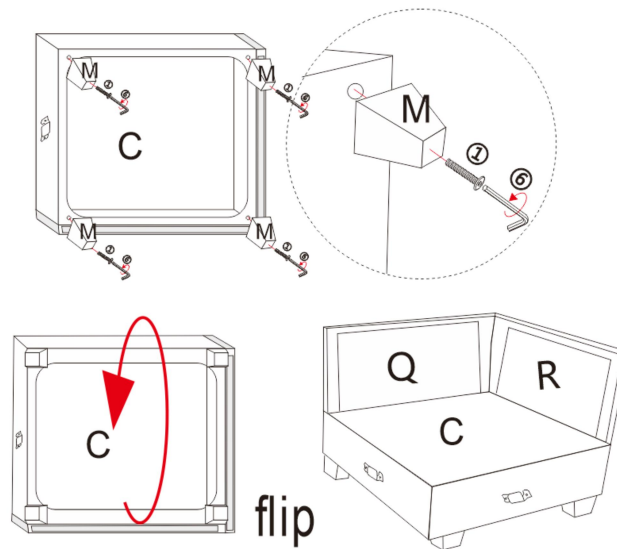

After installing the Corner Bottom Frame (C) and Right Centre Backrest (R), align the four holes on the Corner Bottom Frame (C) with the Leg (M) and use a Allen Wrench (⑥) to secure the Leg (M) and Single Head Screw (①) in order. Tighten the Single Head Screw (①) in this step. Finally, place the installed seat flip on the ground.


Step 9

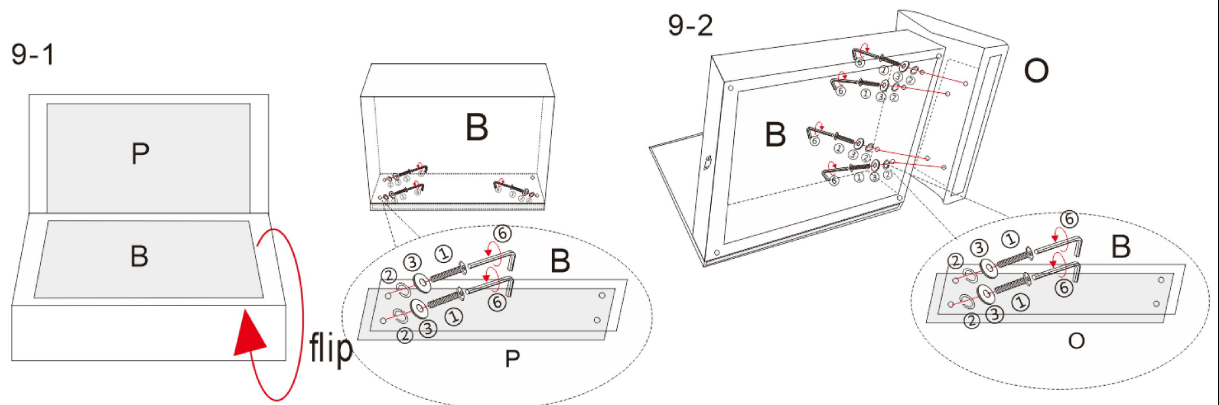

9-1: Align the Backrest (P) with the Right Seat Board (B), then flip it over. Align the holes at the bottom and use a Allen Wrench (⑥) to tighten the Spring Shims (②), Gaskets (③), and Single Head Screw (①) in sequence. Tighten the Single Head Screw (①) in this step.


9-2: Align the holes on the Right Armrest (O) with the holes on the side of the Right Seat Board (B), then use a Allen Wrench (⑥) to tighten the Spring Shims (②), Gaskets (③), and Single Head Screw (①) in sequence. Tighten the Single Head Screw (①) in this step.

Step 10

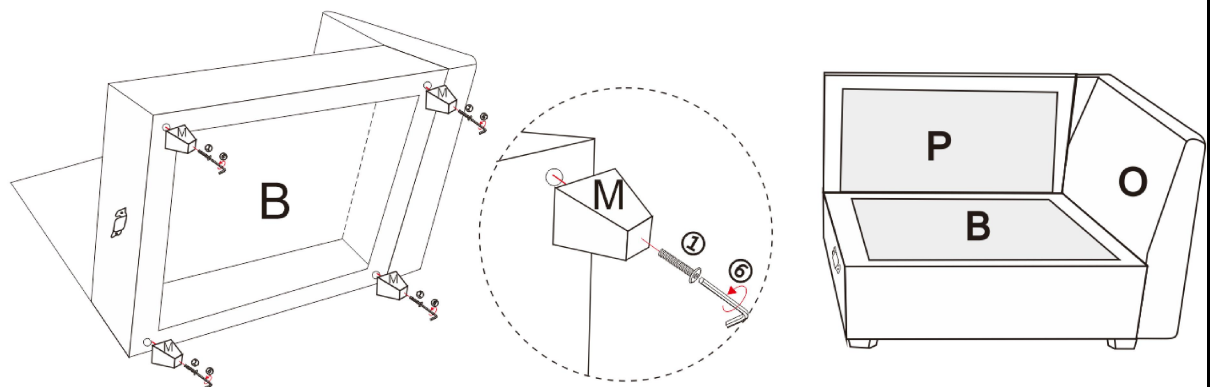

Lay Right Seat Board (B) flat, align Leg (M) with the holes at the bottom of Right Seat Board (B), and use Allen Wrench (⑥) to tighten Single Head Screw (①). This step tightens Single Head Screw (①).


Step 11

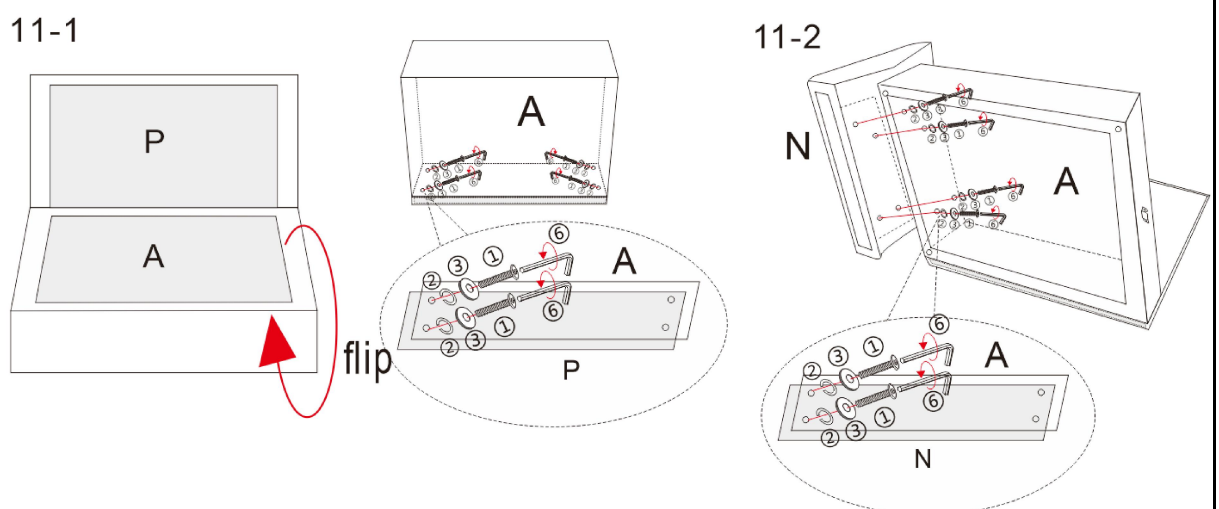

11-1: Align Left Seat Board (A) with Backrest (P) and flip it over, aligning the holes at the bottom, and use Allen Wrench (⑥) to tighten Spring Shims (②), Gaskets (③) and Single Head Screw (①) in order. Tighten Single Head Screw (①) in this step.


11-2: Align the hole on the right side of Left Seat Board (A) with Left Armrest (N), and use Allen Wrench (⑥) to tighten Spring Shims (②), Gaskets (③) and Single Head Screw (①) in order. This step will tighten Single Head Screw (①).

Step 12

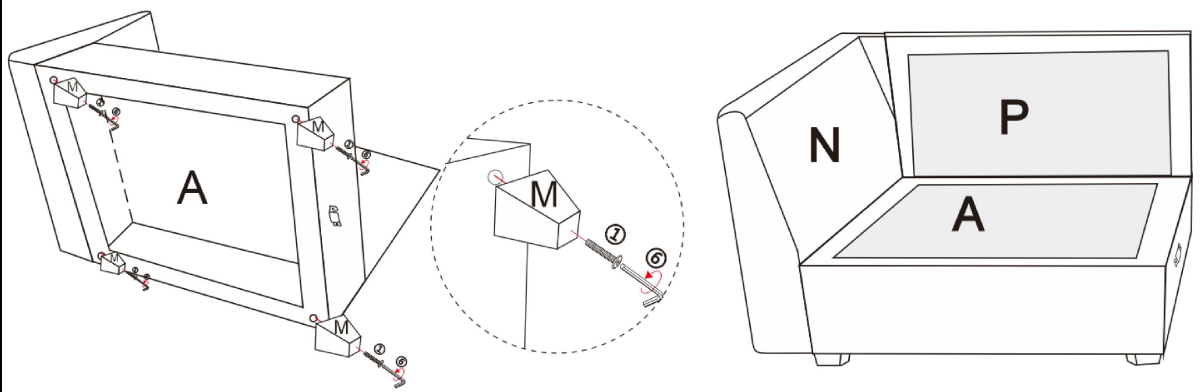


Lay Left Seat Board (A) flat, align Leg (M) with the holes at the bottom of Left Seat Board (A), and use Allen Wrench (⑥) to tighten Single Head Screw (①). This step tightens Single Head Screw (①).

Step 13

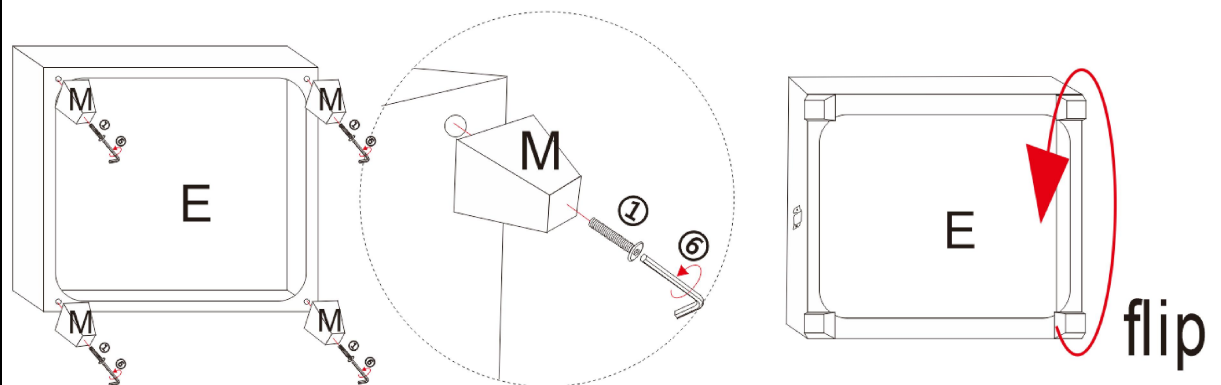

Lay Footrest (E) flat, align Leg (M) with the hole at the bottom of Footrest (E), and use Allen Wrench (⑥) to tighten Single Head Screw (①). This step will completely tighten Single Head Screw (①).

Step 14

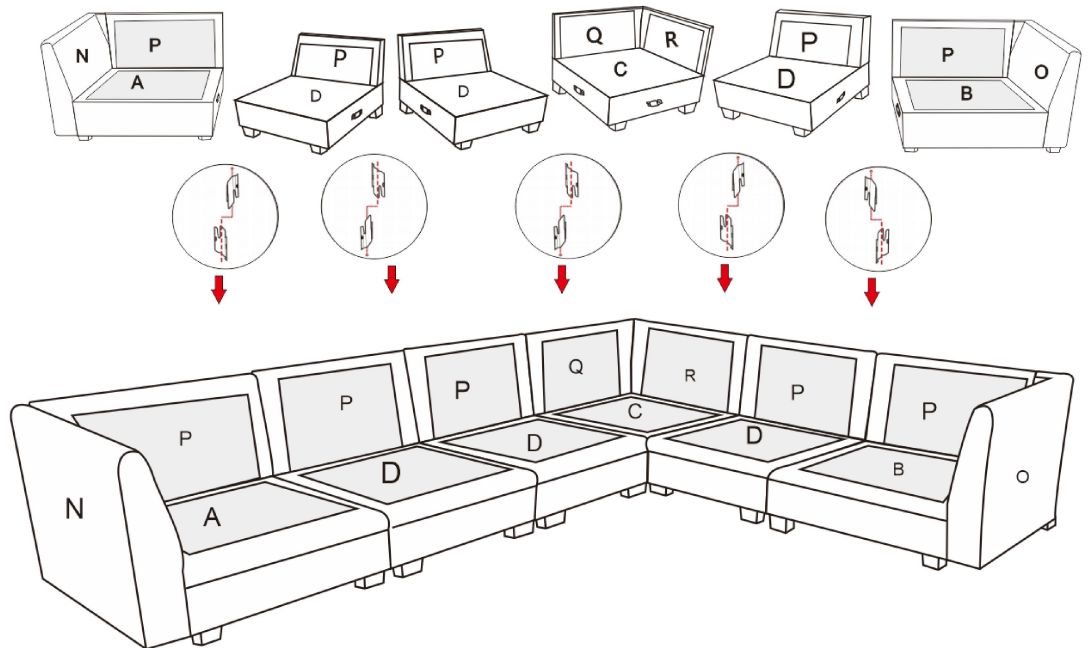


Align Left Seat Board (A) with Middle Seat Board (D), then align Middle Seat Board (D) with Middle Seat Board (D), align Middle Seat Board (D) with Corner Bottom Frame (C), then align Middle Seat Board (D) with Right Seat Board (B), and finally fasten the button to secure it.

NOTE:

1. Insert only half of the hardware into the arm frame or backrest frame box. Do not insert completely.
2. Gently press down on your fingers to prevent the hardware from falling out.
3. At an angle of approximately 45 degrees, first align the hardware with the gap in the seat box.
4. Once the holes are aligned, hold it vertically down vertically and press with both hands at the same time.


Step 15

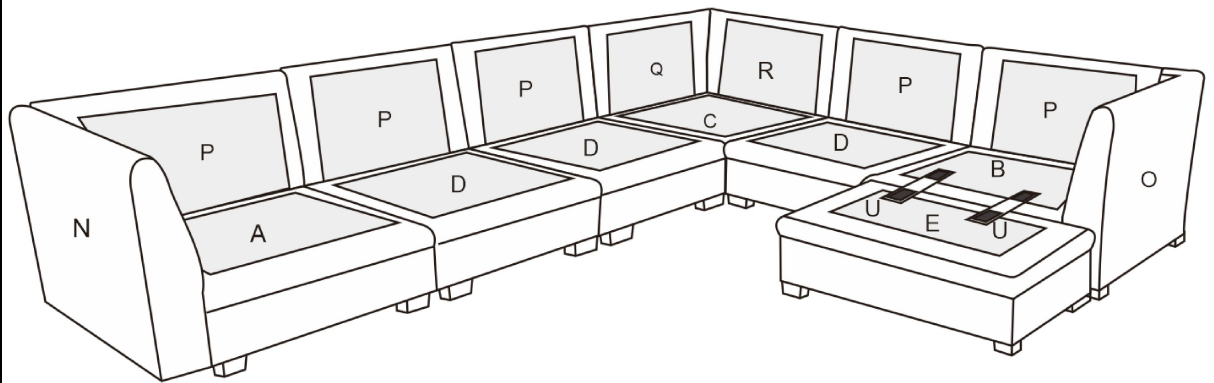

Use Velcro (U) to link Footrest (E) with Right Seat Board (B).

Step 16


peel off the Velcro

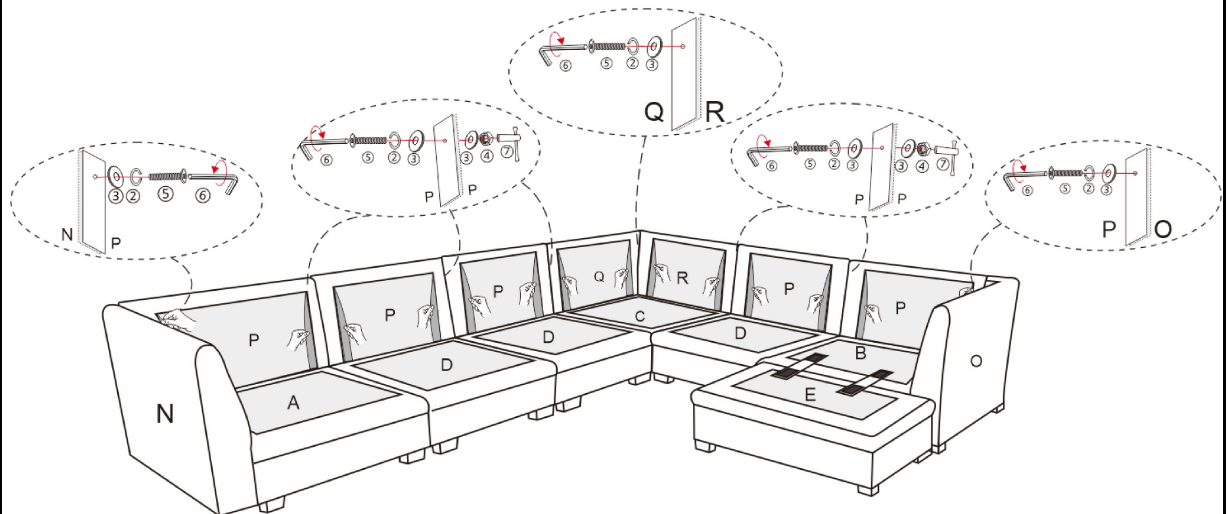

Unfasten the Velcro on both sides of Backrest (P) to align the holes with Left Armrest (N), then use Allen Wrench (⑥) to tighten Single Head Screw (⑤) , Spring Shims (②) and Gaskets (③) . This step will tighten Single Head Screw (⑤). The installation sequence for Right Armrest (O) and Backrest (P),and Left Centre Backrest (Q) and Right Centre Backrest (R) is the same as above.


Align the holes between Backrest (P) and Backrest (P), then insert Gaskets (③) ,Spring Shims (②) and Single Head Screw (⑤) into the holes in sequence. Screw Nut (④) and Gaskets (③) sequentially onto the opposite end of the Single Head Screw (⑤), then use the tool Wrenches (⑦) to tighten Nut (④). Repeat the remaining four steps as described above.

Step 17

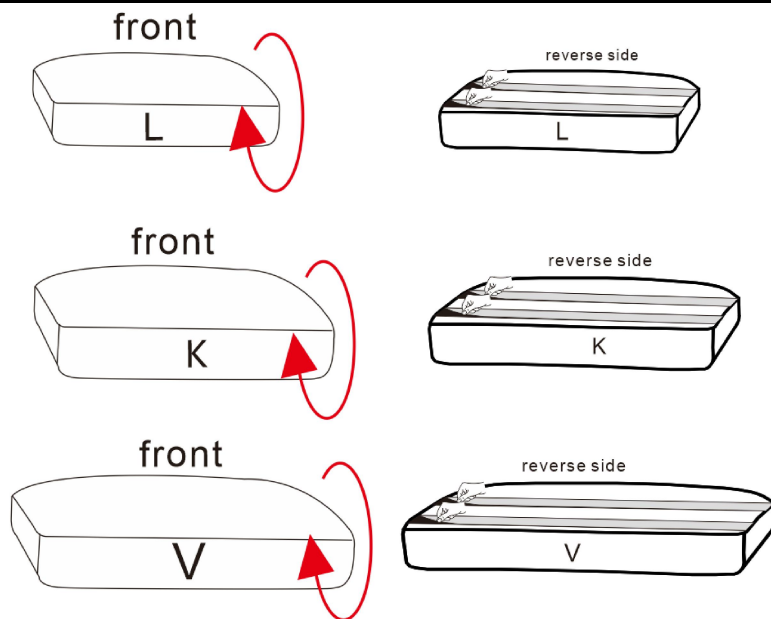


Peel off the Velcro strips behind Corner Seat Cushion (L),Seat Cushion (K) and Foot Mat (V).

Step 18

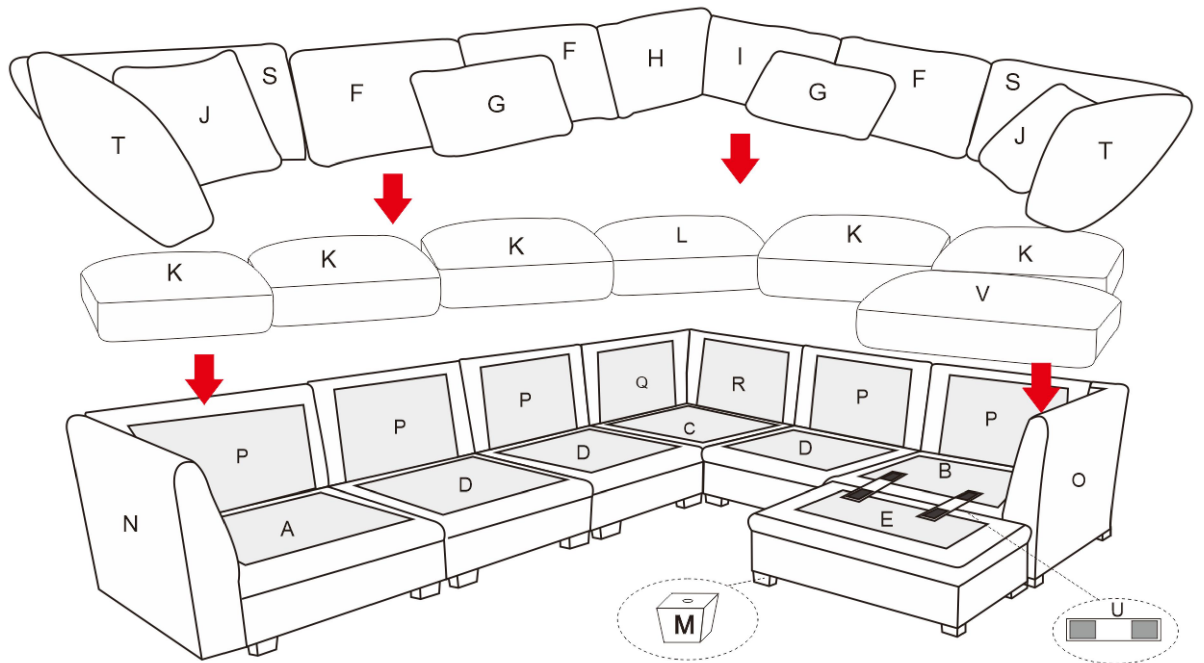

Place Seat Cushion (K), Corner Seat Cushion (L), Foot Mat (V), Right Back Cushion (T), Left Back Cushion (S), Headrest (F), Lumbar Pillow (G), Left Headrest (H), Right Headrest (I), and Small Cushion (J) on the sofa.

Step 19

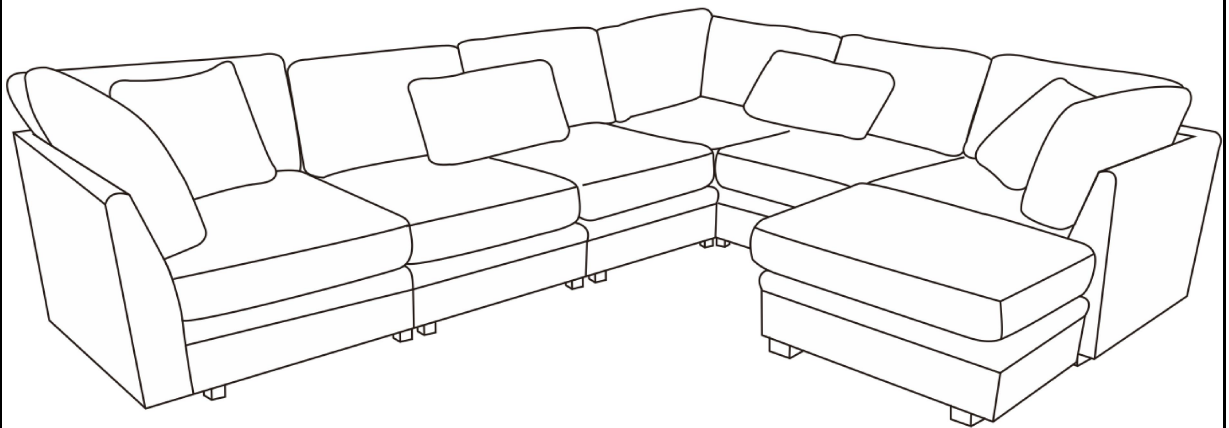

Your sofa is ready for use.

This sofa should only be used on flat, level surfaces.