


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0341

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save this instructions.


Hardware Package (included):

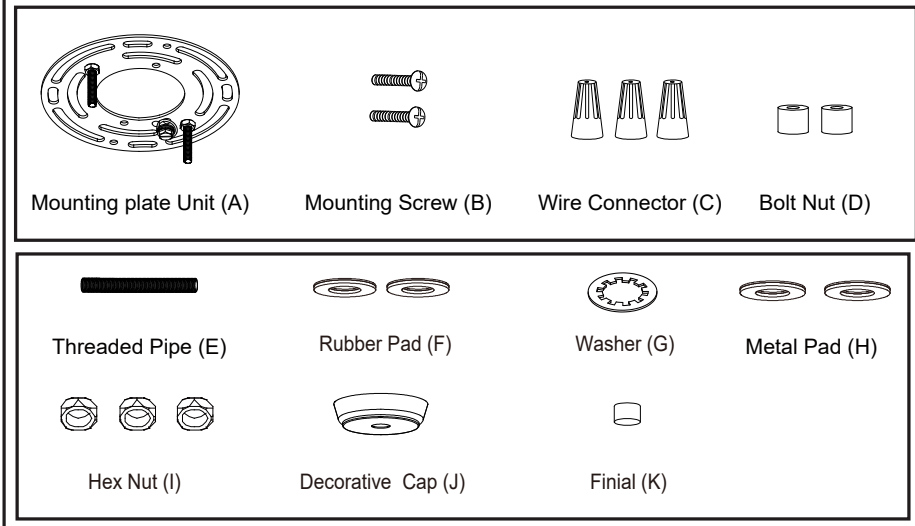

Installation Steps





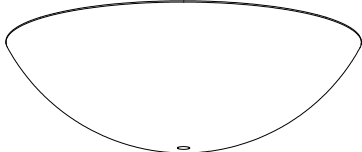


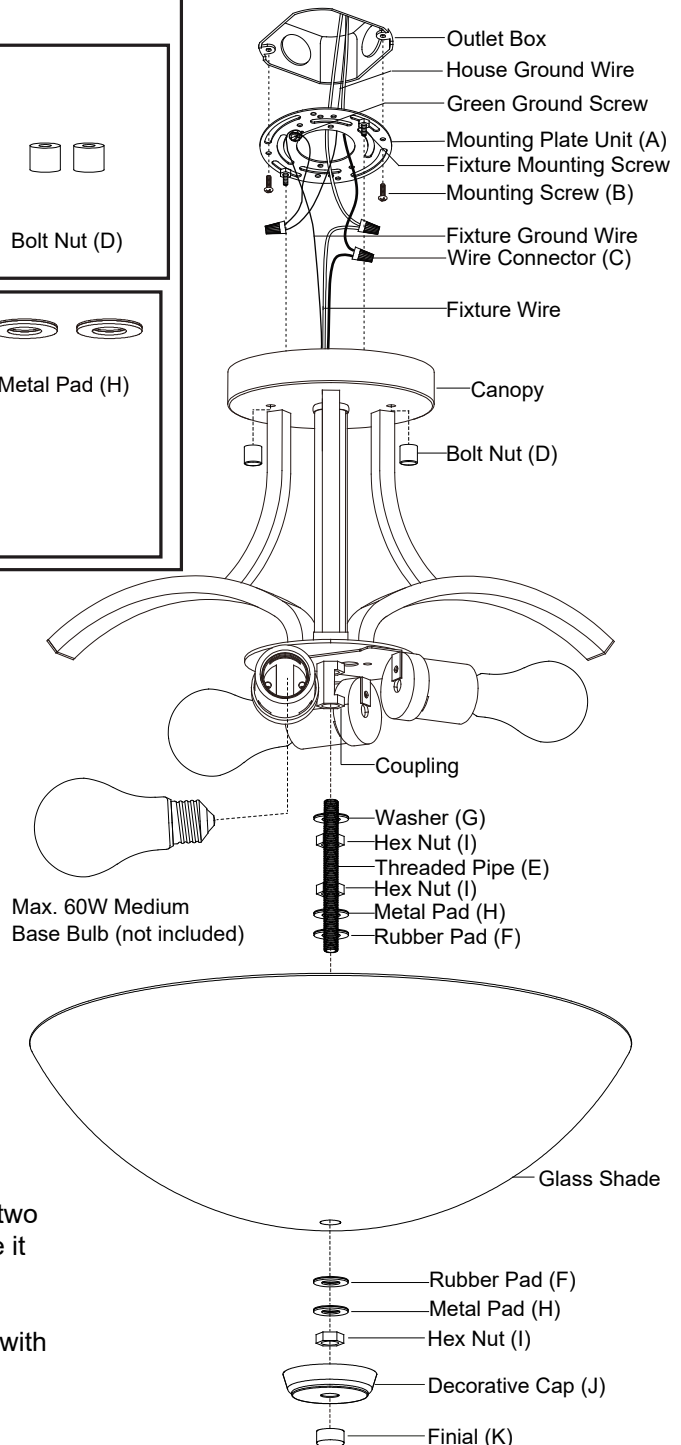





Turn off the power at fuse or circuit box


1. Attach the mounting plate unit (A) to the outlet box by using two mounting screws (B).
2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting plate unit (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C).Carefully put all of the wires back into the outlet box.
3. Attach the canopy to the mounting plate unit (A) by inserting two fixture mounting screws into the holes of canopy, then secure it with the bolt nuts (D).
4. Screw the threaded pipe (E) into the coupling, then secure it with a washer (G) and hex nut (I).
5. Install 3 x 60W Max. medium base bulbs (not included).
See relamping label at socket area or packaging for maximum wattage allowed.
6. Screw a hex nut (I), metal pad (H) and rubber pad (F) to the proper position of the threaded pipe (E) in sequence.



Turn on the power at fuse or circuit box

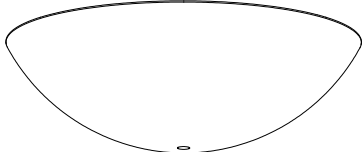Spare Parts List:

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  Glass Shade 10538FG |
| Mounting plate Unit (A) | Mounting Screw (B) | Wire Connector (C) | Bolt Nut (D) | |
|  |  |  |  |  Glass Shade 10538FG |
| Threaded Pipe (E) | Rubber Pad (F) | Washer (G) | Metal Pad (H) | |
|  |  |  | | |
| Hex Nut (I) | Decorative Cap (J) | Finial (K) | | |

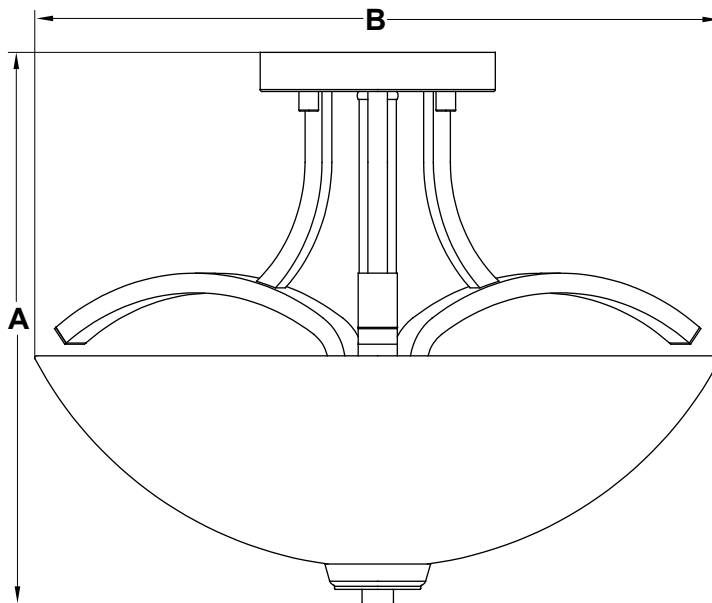

B: 14-1/2"

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.



VAXCEL
250806