

#### Notice:

- 1. Follow the installation instructions. Please confirm all accessories are preset before installation.
- 2. Do not fully tighten the screws during initial assembly. Fully tighten screws only once all pieces which are correctly assembled.
- 3. If you encounter any problems during installation, please contact our customer service.
- 4. Please unbox the item from the side with an open-label and put a carpet on the foor to avoid scratching it.







Put a carpet on the floor before unpacking



Estimate installation time: 30 minutes

#### Components - fittings

Please check you have all the panels listed below.


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

Item no.	Reference Image	Qty	Item no.	Reference Image	Qty
А		x2	3		x2
В		x1	4		x19
С		x1	5		<b>x</b> 3
D		x5	6		x2
1	O DIDID	x2	7		<b>x</b> 3
2		x2	8		<b>x</b> 6











WARNING: To prevent falling down this product must be used with the wall attachment device provided.


WARNING: Assess the suitability of the wall to ensure that the fastening devices will withstand the forces generated.

WARNING: The maximum load-bearing capacity of this furniture is:40-60kg, please do not overload!


Load-bearing capacity primarily depends on the installation method and wall structure. Always identify the wall type first and hire professional installers using fasteners specifically designed for that wall type.

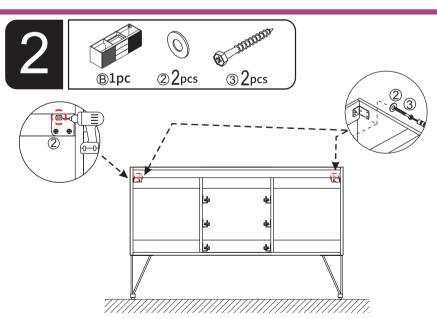


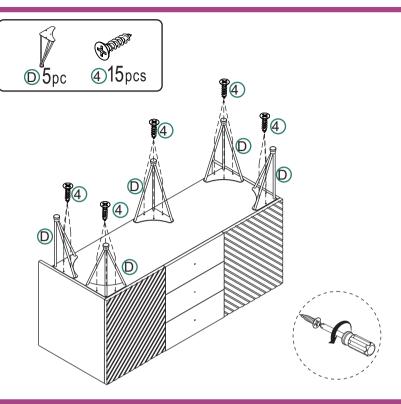

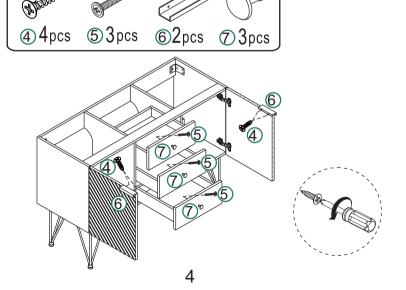



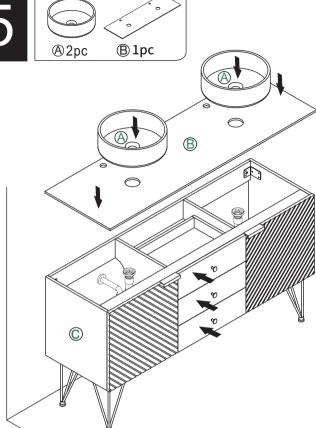




Pop-up Waste Installation

STEP 1 Install Pop-up Waste with over flow.

#### STEP 2 Connect the drain pipe.


This product does not include drainage accessories. The content on this page is provided as installation suggestions only. Please carry out the installation according to the requirements of the product you actually purchased.






# Installation of drain assembly

Turn the screw at the bottom of the guide rail counterclockwise!

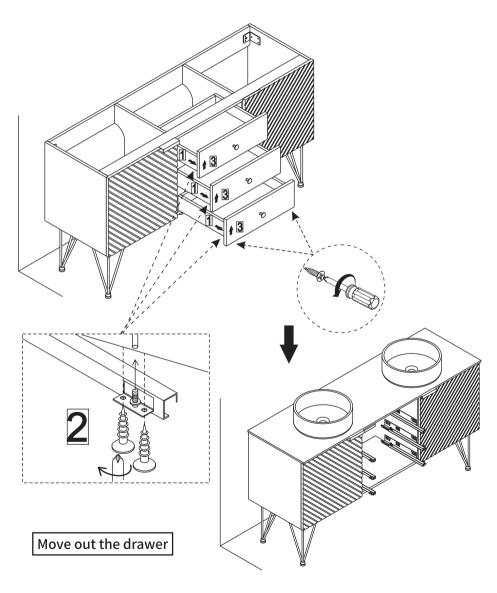


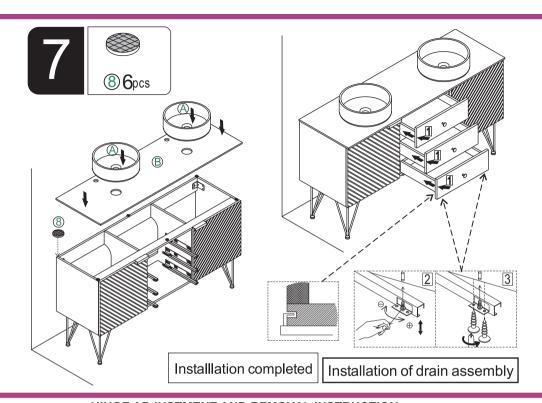

### HINGE ADJUSTMENT AND REMOVAL INSTRUCTION




HOW TO ADJUST HINGES (if required)



DRAWERS REMOVAL & RE—INSTALLATION (if required)


# **PIVOT-PRO** side adjustment

Side adjustment of the door is made by using the indicated screw.

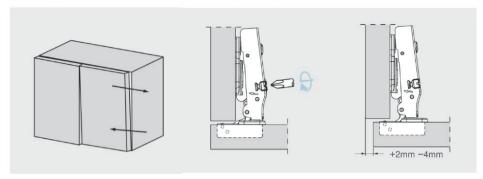

## **PIVOT-PRO Depth Adjustment**

Depth adjustment is made without loosening any screw. The door can be moved in or outby rotating the cam adjuster on the hinge arm.

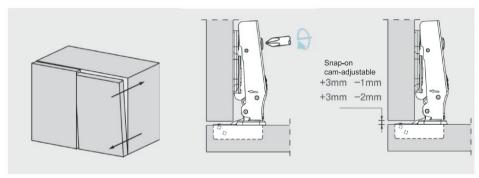

# **PIVOT-PRO Height Adjustment**

By loosening the two fixing screws to allow the mounting plate to slide up or down ,the door can be adjusted vertically by ±2mm. After retightening the screws, the Depth adjustment is done.

