

Owner's Manual

with Assembly Instructions

Styles and colors may vary.
Made in China.

The owner's manual contains important safety information as well as assembly, use and maintenance instructions.

The Ride-on Car must be assembled by an adult who has read and understands the instructions in this manual.

Keep the package away from children and dispose of properly before use.

Keep this manual for future reference.

On the purchase of your new Ride-On.

This ride-on will provide your child with many miles of riding enjoyment. To help ensure a safe ride we ask you to please read this manual carefully, and keep it for future reference.

Please follow the recommendations in this manual, they are designed to improve the safety and operation of your ride-on car and it's rider.

HZB-9520 Children Battery Powered Ride-On manufactured by Chizhou Haizhibao Children Products Co., Ltd. (Add: Matang Industrial Zone, qingyang County, Chizhou City, Anhui Province, P.R.China).

SPECIFICATIONS:

Battery	24V5AH *1		
Charger	28V800mA		
Input	Depend on local voltage		
Motor	550-12000		

Suitable age: over 36 months

Load Capacity: Under 30kg

Speed: 3km/h

Size of ride-on car: 86*57.5*54.5CM

Power way: Charging type

Charge time: 8-12 hours

WARNING!

- **CHOKING HAZARD** - Small parts. Not suitable for children under 36 months. The product contains small parts, keep children away when assembling.
- **ADULT ASSEMBLY REQUIRED.**
- Always remove protective material and poly bags and dispose before assembly.
- Protective equipment should be worn. Always wear shoes and sit in the seat when operating the vehicle.
- Only drive on level ground. Never use on the lawn.
- Keep your hands, hair, and clothes away from moving parts.
- Never leave child unattended. Direct adult supervision is required. Always keep child in view when child is in vehicle.
- To reduce the risk of injury, adult supervision is required. Never use in roadways, near motor vehicles, on or near steep inclines or steps, swimming pools or other bodies of water, always wear shoes, and never allow more than 1 rider.
- Never use in unsafe conditions such as snow, rain, loose dirt, mud, sand, or gravel, otherwise may result in an unexpected accident such as tipping over, and could damage the electrical system or battery
- Not to be used in traffic.
- This toy should be used with caution since skill is required to avoid falls or collisions causing injury to the user or third parties.
- This toy is unsuitable for children under 36 months due to its maximum speed; Maximum user weight is 30kg.
- This toy has no brake.

BATTERY INFORMATION


- Non-rechargeable batteries are not to be recharged.
- Rechargeable batteries are to be removed from the toy before being charged.
- Rechargeable batteries are only to be charged under adult supervision.
- Different types of batteries or new and used batteries are not to be mixed.
- Batteries are to be inserted with the correct polarity.
- Exhausted batteries are to be removed from the toy.
- The supply terminals are not to be short-circuited.

WARNING!

The remote control is not a toy, and is only allowed to be operated by adults.

Parts Diagram 3

HINT: Some parts shown are assembled on both sides of vehicle






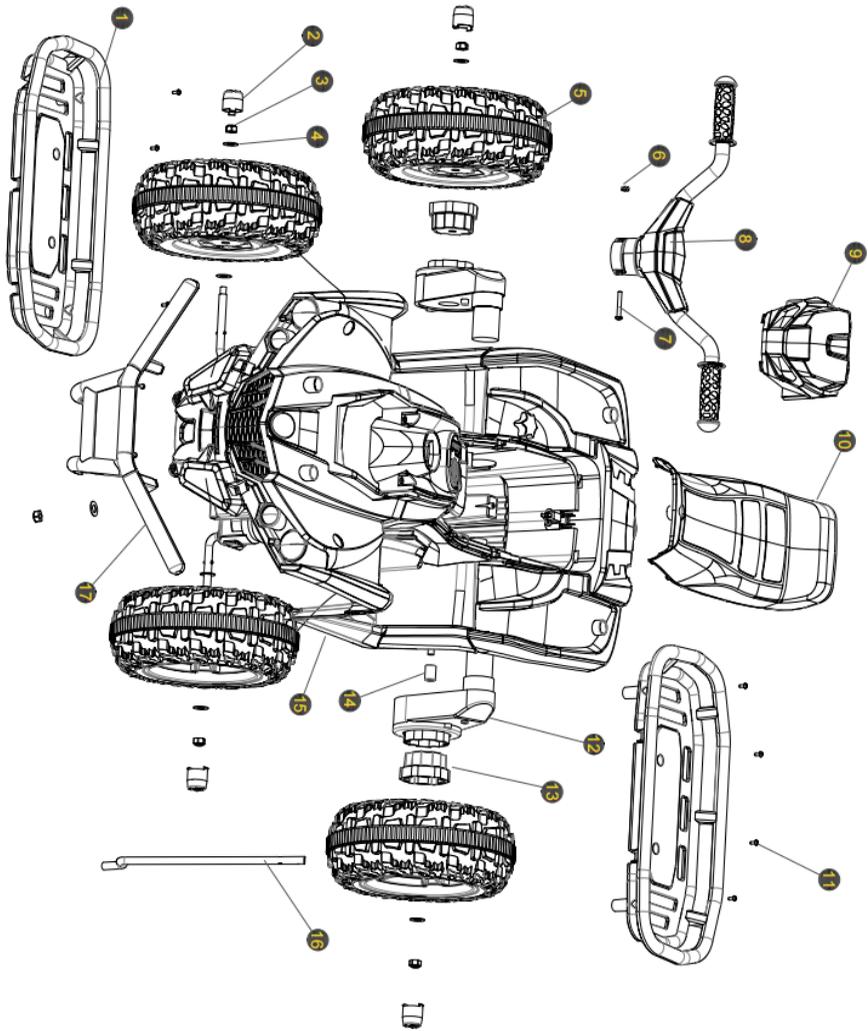



Assembly tools required:



Screwdriver

Parts List | 4

<p>1 Frame x2</p> 	<p>2 Wheel cover x4</p> 	<p>3 M8 nut x5</p> 
<p>4 Ø8Gasket x8</p> 	<p>5 Wheels x4</p> 	<p>6 M5 nut x1</p> 
<p>7 M5*35 bolt x1</p> 	<p>8 Steering wheel x1</p> 	<p>9 Instrument x1</p> 
<p>10 Seat x1</p> 	<p>11 Ø4*14 screw*12</p> 	<p>12 Motor x2</p> 
<p>13 Wheel connector x2</p> 	<p>14 Rear axle x1</p> 	<p>15 Vehicle body x1</p> 
<p>16 Steering shaft x1</p> 	<p>17 Front guard x1</p> 	

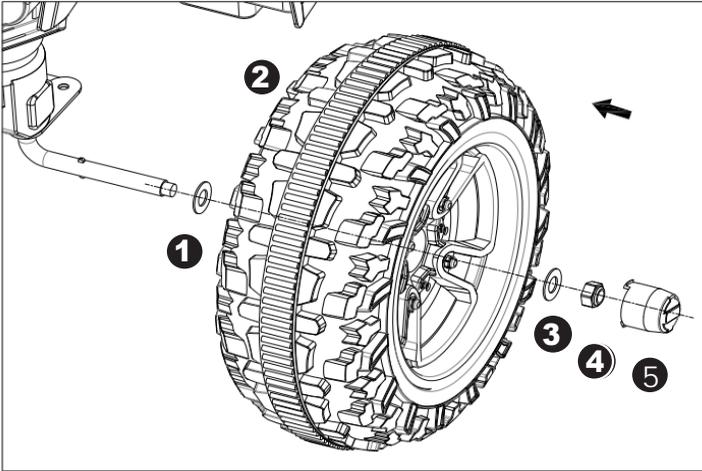

Remove all the parts from the front axle;

1.First insert the gasket into the steering shaft;



2.Insert the front wheel into the steering shaft;

3.Insert the gasket into the steering shaft;

4.Insert the M8 nut to tighten and fix;

5.Finally insert the wheel cover into the hub.

6.Repeat the above procedure to assemble the other Front Wheel.

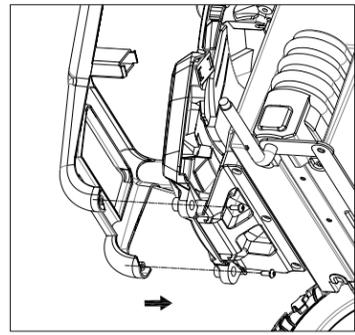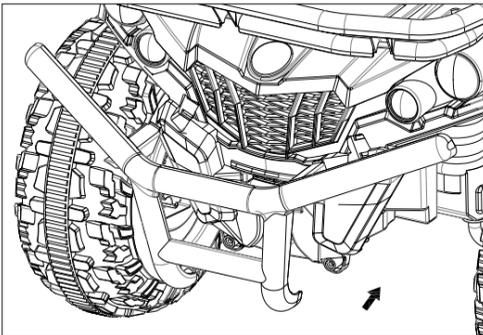


Push the front guard into the front of the car and then tighten the fixing with two $\text{Ø}4 \times 14$ screws.

Attach the Rear Wheels | 6


Remove all the parts from the rear axle.

Rear Bottom View


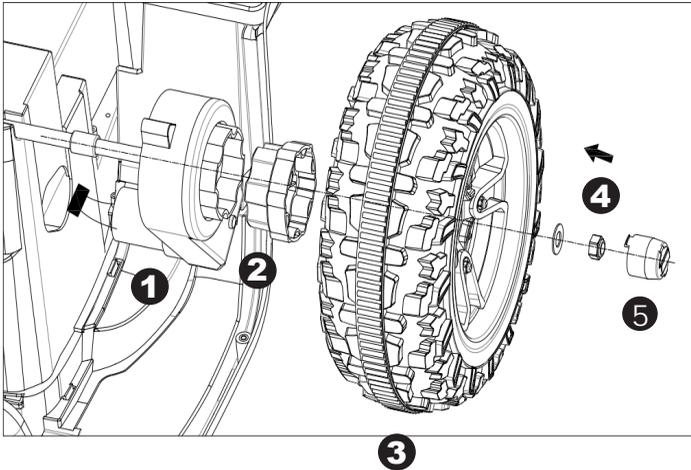


1. Insert the rear axle and the motor through it;
2. The rear wheel plum after passing through the rear axle into the motor;
3. Insert the rear wheel into the rear axle;
4. Use the gasket to cover the rear axle and tighten the M8 nut; DO NOT over tighten;
5. The wheel cover stuck into the hub.
6. Repeat the above procedure to assemble the other Rear Wheel.



HINT: An extra spanner has been provided to hold the Lock Nut on the other side of the rear axle while tightening the Lock Nut on the other side.

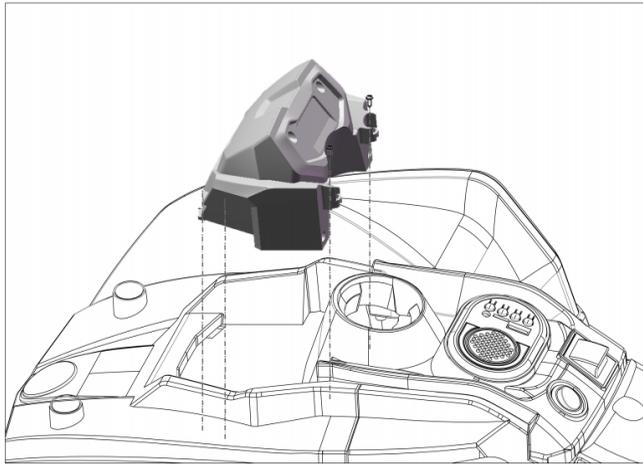

Snap the instrument snap hooks into the body first, then tighten and secure with two $\text{Ø}4 \times 14$ screws;

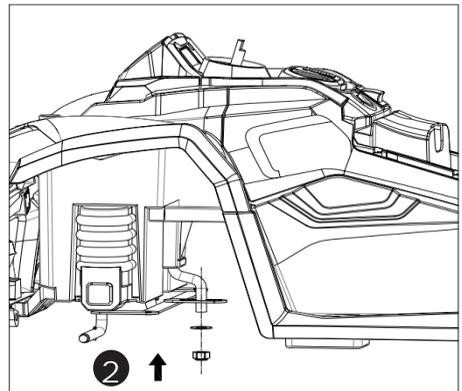
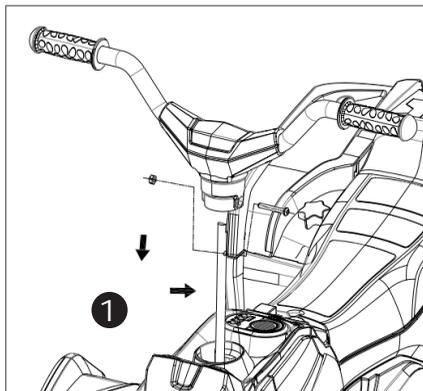


1. Firstly, Put the handlebar into the main steering shaft and then align the hole with it; Secondly, tighten and fix it with the M5 bolt through the main steering shaft and the M5 nut;
2. Firstly, put the main steering shaft into the body, then use the gaskets to set into the main steering shaft and then tighten and fix it with M8 nut;

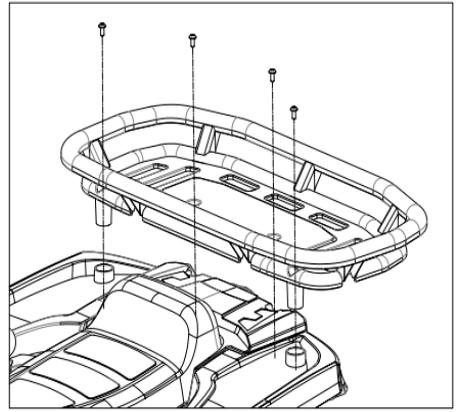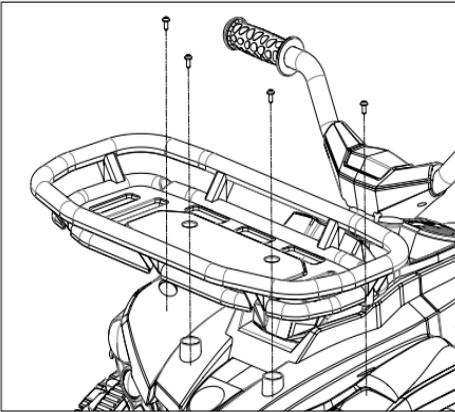


After placing the front and rear frame bottom columns aligned with the body holes, and tighten the $\varnothing 4 \times 14$ screws*8 to secure them;

Turn the vehicle body upright.

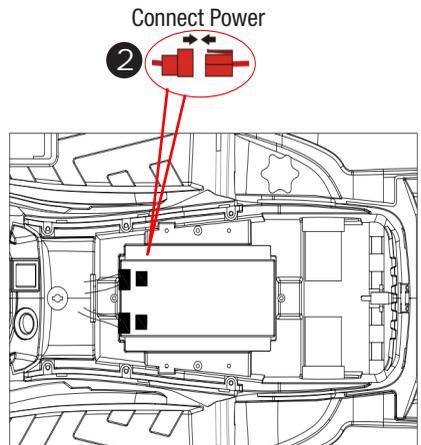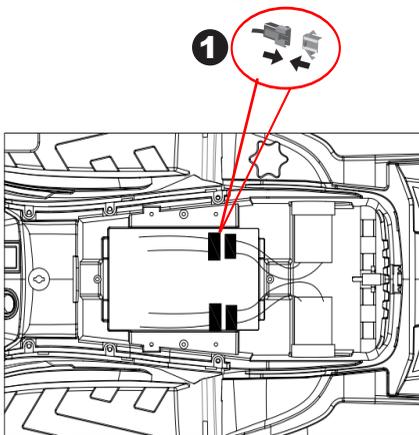


1. After attach 4 wheels, reverse the vehicle body and then plug into the body socket. Repeat the above procedure to assemble the other Rear Wheel.

2. Plug the vehicle connector into the connector on the battery.

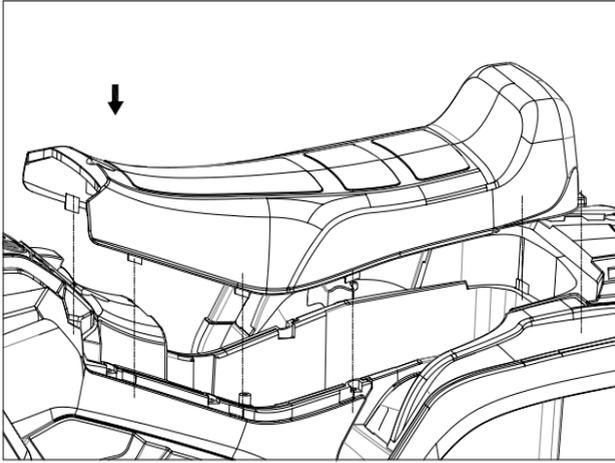


Firstly, snap the seat rear card key into the body, then push the bottom card hook into the body slot after aligning it with the body locking screws to secure it;

Control Panel

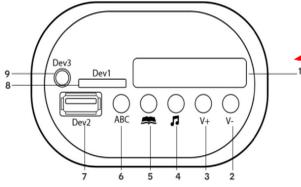

- 1 Battery display
- 2 Volume-
- 3 Volume+
- 4 Song
- 5 Story
- 6 Song
- 7 USB card slot
- 8 TF card slot
- 9 Aux

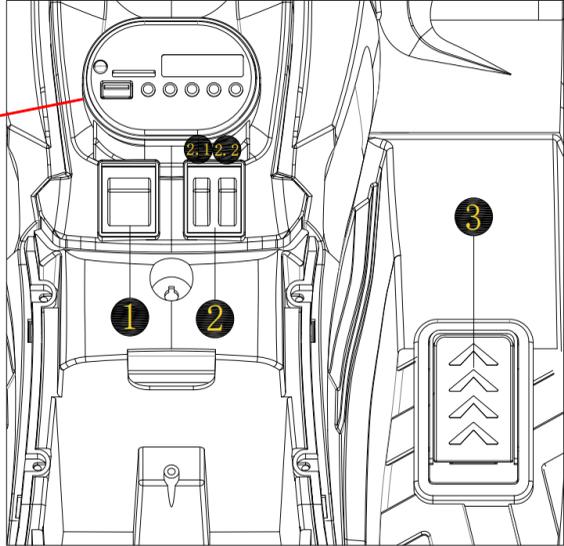

1. Forward/reverse switch: Changes the direction that product moves from forward to reverse.

2.2.1. Power button: Turns the product on and off.

- To move the product forward, shift the switch to top position.
- To move the product backward, shift the switch to down position.

2.2.2. Selector button: Change the speed high or low.

3. Foot pedal: Applies power (speed) to the product.

- To move the product, press the pedal down.
- To brake or slow down, release pressure from the pedal.

⚠ IMPORTANT

- Always stop vehicle when changing the speed or direction to avoid damage the gears and motor.
- **HIGH SPEED (If equipped):** Make sure your child knows how to steer, how to start and stop the product and knows the rules for safe driving.



Use the vehicle on generally level ground **ONLY!**



DO NOT Use the vehicle on Lawn space!

WARNING!

- **ONLY an adult is allowed charge and recharge the battery!**
- **This product with Charging Protection: when charging, all functions will be cut off.**

- The POWER SWITCH must be turned in OFF position when charging.
- Before the first use, you should charge the battery for 8-12 hours.
- When the vehicle begins to run slowly, recharge the battery.
- After each use or once a month minimum recharge time as 8 to 12 hours, less than 20 hours at most.
- Use only battery(ies) and charger specified by the manufacturer. Using another battery or charger may cause a fire or explosion. Do not use the battery or charger for any other product.
- If your ride-on with a Digital voltmeter(IF EQUIPPED), the magnitude of voltage will tell you how much power is remaining in the battery when you must recharge the battery. Make sure the vehicle is stop!

12V product	less than 12.5V	The battery needs to be charge.
24V product	less than 24.1V	

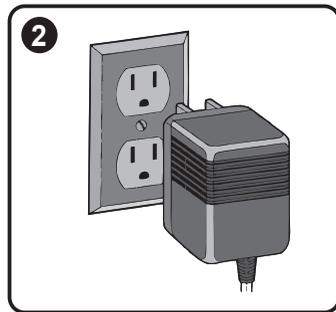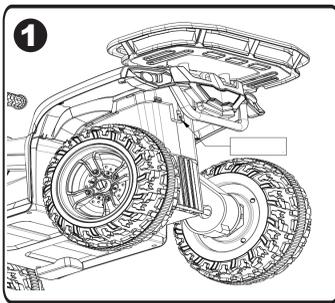

1. Plug the charger port into the input socket (the socket is at the rear of the vehicle).
2. Plug the charger plug into a wall outlet. The battery will begin charging.

Battery Disposal



The battery will eventually lose the ability to hold a charge. Depending on the amount of use, and varying conditions, the battery should operate for one to three years.

Important! Recycle the dead battery responsibly. The battery contains lead acid (electrolyte) and must be disposed of properly and legally. It is illegal in most areas to incinerate lead acid batteries or dispose of them in landfills. Take it to a federal or state-approved lead acid battery recycler, such as local automotive battery retailer.

Do not throw the battery away with your regular household waste!

Problem	Possible Cause	Solution
Vehicle does not run	Battery low on power	Recharge battery.
	Thermal fuse has tripped	Reset fuse, see <Fuse>
	Battery connector or wires are loose	Check that the battery connectors are firmly plugged into each other. If wires are loose around the motor contact your distributor please.
	Battery is dead	Replace battery, contact your distributor please.
	Electrical system is damaged	Contact your distributor please.
	Motor is damaged	Contact your distributor please.
Vehicle does not run very long	Battery is under charged	Check that the battery connectors are firmly plugged into each other when recharging
	Battery is old	Replace battery, contact your distributor please.
Vehicle runs sluggishly	Battery low on power	Recharge battery, contact your distributor please.
	Battery is old	Replace battery, contact your distributor please.
	Vehicle is overload	Reduce weight on vehicle.
	Vehicle is being used in harsh conditions	Avoid using vehicle in harsh conditions, see <User Notice>.
Vehicle needs a push to go forward	Poor contact of wires or connectors	Check that the battery connectors are firmly plugged into each other. If wires are loose around the motor, contact your distributor please.
	“Dead Spot” on motor	A dead spot means the electric power is not being delivered to the terminal connection and the vehicle needs repair. Contact your distributor please.
Difficult shifting from forward to reverse or vice-versa	Attempting to shift while the vehicle is motion	Completely stop the vehicle and shift, see <Use Your Ride-On>
Loud grinding or clicking noises coming from motor or gear box	Motor or gears are damaged	Contact your distributor please.
Battery will not recharge	Battery connector or adapter connector is loose	Check that the battery connectors are firmly plugged into each other.
	Charger not plugged in	Check that the battery charger is plugged into a working wall outlet.
	Charger is not working	Contact your distributor please.
Charger feels warm when recharging	This is normal and not a cause for concern	

Completely read through this manual and the troubleshooting guide table before calling. If you still need help resolving the problem **Contact your distributor please.**

- It is parents' responsibility to check main parts of the toy before using, Must regularly examine for potential hazard, such as the battery, charge, cable or cord, plug, screws are fastening enclosure of other parts and that in the event of such damage, the toy must not be used until that damage had been properly removed.
- Park the vehicle indoors or cover it with a tarp to protect it from wet weather.
- Recharge the battery after each use. Only an adult can handle the battery. Recharge the battery at least once a month when the vehicle raider is not being used.
- Do not wash the vehicle with a hose. Do not wash the vehicle with soap and water. Do not drive the vehicle in rainy or snowy weather. Water will damage the motor, electric system and battery.
- Clean the vehicle with a soft, dry cloth. To restore shine to plastic parts, use a non-wax furniture polish. Do not use car wax. Do not use abrasive cleaners.
- When not using, all the electrical source should be turn off. Turn off the power switch and disconnect the battery connection.

Fuse

The battery features a thermal fuse with a reset fuse that will automatically trip and cut all power to the vehicle if the motor, electric system or battery is overloaded. The fuse will reset and power will be restored after the unit is turned OFF for 20 seconds and then turned ON again. If the thermal fuse trips repeatedly during normal use, the vehicle may need repair. **Contact your distributor please.**

To avoid losing power, follow these guidelines:

- Do not overload the vehicle.
- Do not tow anything behind the vehicle.
- Do not drive up steep slopes.
- Do not drive into fixed objects, which may cause the wheels to spin, causing the motor to overheat.
- Do not drive in very hot weather, components may overheat.
- Do not allow water or other liquids to come in contact with the battery or other electric components.
- Do not tamper with the electric system. Doing so may create a short, causing the fuse to trip.



RISK OF FIRE. Do not bypass. Replace only with a new fuse.

**Our products are suitable for
ASTM F963; GB6675; EN71 and EN62115 standard.**