

# **Bathtub Faucet**

# **Installation Manual**

**W-97(ES)**

# **Warranty Duration**

All components of this faucet system are covered under a lifetime limited warranty, ensuring they are free from defects in material and workmanship for the original purchaser.

## **Repair and Replacement**

If the product shows defects in material or workmanship under normal use and within the warranty period, we will, at our discretion, either repair the product or provide a replacement at no cost to the original purchaser. Please note that proof of purchase (e.g., an invoice) is required when requesting service. The warranty does not cover damages caused by improper installation, misuse, or modifications.

## **Exclusions**

We shall not be responsible for the following cases:

- Damage to the product caused by improper installation, misuse, unauthorized repair or replacement, or abuse (including damage during shipment).
- Damage to the product caused by improper dismantling after installation.
- Damage resulting from abnormal water pressure or impurities in water pipes, which is not covered under this warranty.
- Rust on the product due to insufficient care and maintenance, which is not covered under this warranty.
- Damage caused by natural disasters such as fire, flood, earthquake, lightning storms, etc., which is not covered under this warranty.

I hope this helps! If you have any further questions or concerns, please let me know.

## **Having Trouble? Contact us.**

 Email: [info@faucetsupport.com](mailto:info@faucetsupport.com)

 Toll Free: 1-888-969-6880



**M5051  
SFS-1159  
Model:A**

## **CONTENT**

---

**1. Bathtub Faucet Installation Manual----- (1-4)**


## **CONTENIDO**

---

**1. Manual de instalación del grifo de bañera----- (5-8)**

## ◆ Installation and Maintenance Matters

- 1.Check the accessories list to verify that all parts are complete in this package.
- 2.Do not disassemble the main body by yourself.
- 3.Connect inlet pipes to supply valves.
- 4.Make sure inlet pipes and supply valves have no impurities and are cleaned, with no impurities in the pipeline.
- 5.After installation, check all joints for leakages.
- 6.Do not leave the rain shower system exposed to a severely corrosive environment.





### Do's

- 1.In order to keep the mixer surface bright, please clean the mixer regularly.
- 2.Rinse the faucet with clean water and wipe it with a soft cotton cloth.
- 3.Use one of the following cleaners to remove dirt from the surface: a. Mild liquid cleaner. b. Colorless glass cleaner and powder cleaner that do not cause abrasion and can be dissolved completely. c. Polish liquid that does not cause abrasion.

### Don'ts

- a. Avoid using cleaning powder, harsh cleaning chemicals, brushes and coarse cloth to prevent scratching and friction.
- b. Do not use acid cleaners to clean the faucet as they may cause surface corrosion of the faucet. If the faucet is exposed to harmful acid substances, please rinse it immediately with water.


### Tools Needed:



◆ Bathtub Faucet Set

**Model:A**


**Accessories List**

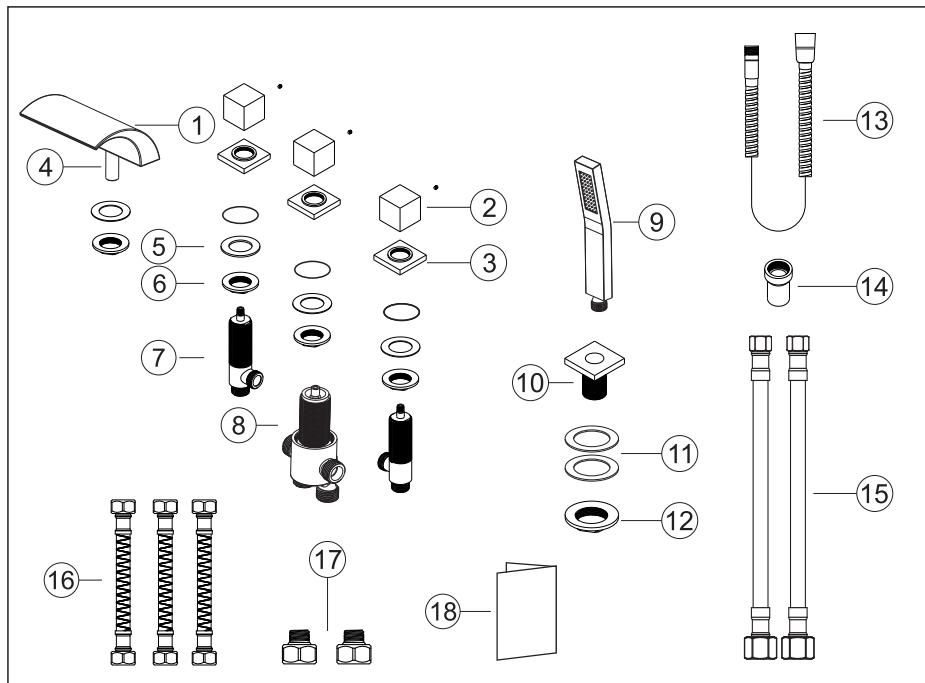

No.	Part name	Qty	No.	Part name	Qty
1	Spout	1	10	Hand shower base	1
2	Handle	3	11	Mounting washer gasket	1
3	Handle trim plate	3	12	Hand pedestal nut	1
4	Spout shank	1	13	Shower hose	1
5	Mounting gasket	4	14	Hand shower hose adapter	1
6	Mounting nut	4	15	Hot and cold hoses	2
7	Handle valve body	2	16	Inlet hose	3
8	Diverter body	1	17	Hand shower hose adapter	2
9	Hand-shower	1	18	Instruction manual	1


## ◆ Bathtub Faucet Installation

### Step 1

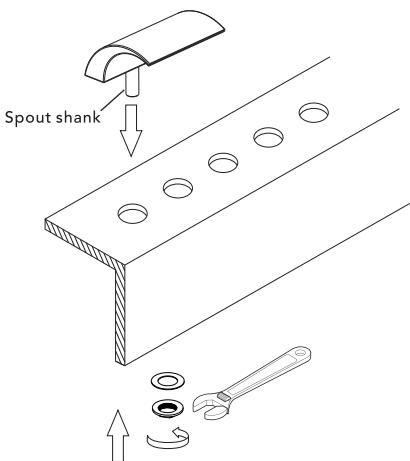

Connect the spout shank to the spout and insert the spout shank into the mounting surface. Place the mounting gasket and mounting nut onto the spout shank from the underside of the mounting surface and tighten securely ensuring the spout is in the proper position.


### Step 2

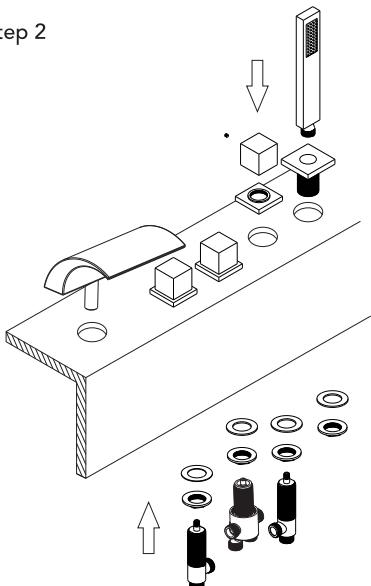

Remove the handle trim plates from the handle valve body and set them aside. From the underside of the mounting surface, insert the correct handle valve body (hot on the left, cold on the right) and the diverter body. Screw on the handle trim plate to the desired height for the handle and install them. Ensure the handles are in the proper position from the underside of the mounting surface and tighten securely. Remove the hand shower mounting nut, washer, and gasket from the hand shower base. Insert the hand shower base into the mounting surface. From the underside of the mounting surface, place the gasket, washer, and mounting nut onto the shank of the hand shower base and tighten securely.


## ◆ Bathtub Faucet Installation

### Step 3

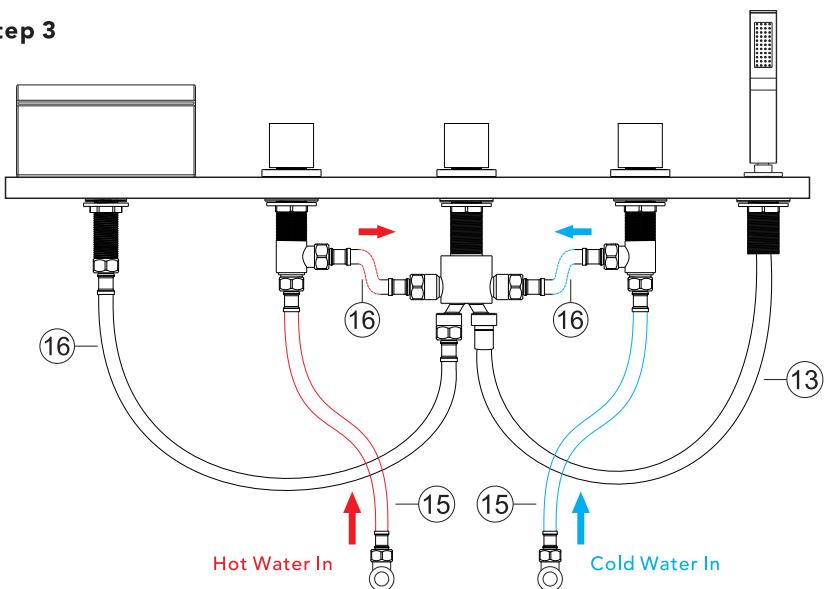

Install all the hoses as indicated in the image above. Connect one end of the inlet hoses to the left and right side outlets on the diverter body, and connect the opposite ends of the inlet hoses to the side outlets of the hot and cold handle valve bodies. Attach one end of the shower hose to the hand shower and feed the other end through the hand shower base and connect it to the hand shower hose.



### Step 4

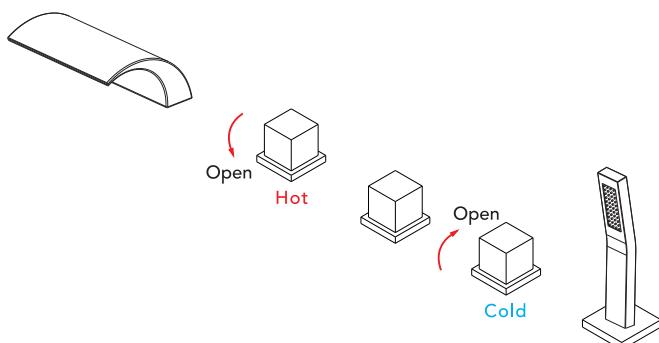

1. As shown in the diagram, the handle controlling hot water turns counterclockwise to open, while the handle controlling cold water turns clockwise to open.
2. The center handle functions as the water outlet mode selector.

## ◆ Instalación y cuestiones de mantenimiento

- 1.Verifique la lista de accesorios para comprobar que todas las partes están completas en este paquete.
- 2.No desmonte el cuerpo principal por sí mismo.
- 3.Conecte las tuberías de entrada a las válvulas de suministro.
- 4.Asegúrese de que las tuberías de entrada y las válvulas de suministro no tengan impurezas y estén limpias, sin impurezas en la tubería.
- 5.Después de la instalación, verifique todas las uniones para detectar fugas.
- 6.No deje el sistema de ducha tipo lluvia expuesto a un ambiente severamente corrosivo.






### Hacer

- 1.En para mantener la superficie de la batidora brillante, límpie el mezclador regularmente.
- 2.Inse el grifo con agua limpia y límpielo con un suave ropa de algodón.
- 3.Utilice uno de los siguientes limpiadores para eliminar la suciedad de la superficie: a. Limpiador líquido suave. b. Limpiador de vidrio incoloro y limpiador en polvo que no causen abrasión y que se puedan disolver completamente. c. Líquido pulidor que no cause abrasión.

### No es decir

- A.Valte con polvo de limpieza, productos químicos de limpieza duros, cepillos y tela gruesa para evitar rascar y fricción.
- B. No use limpiadores de ácidos para limpiar el grifo, ya que pueden causar corrosión superficial del grifo. Si el grifo está expuesto a sustancias ácidas dañinas, enjuague inmediatamente con agua.


## HERRAMIENTAS NECESARIAS:



◆ Juego de grifo para bañera

**Modelo:A**


**Lista de accesorios**

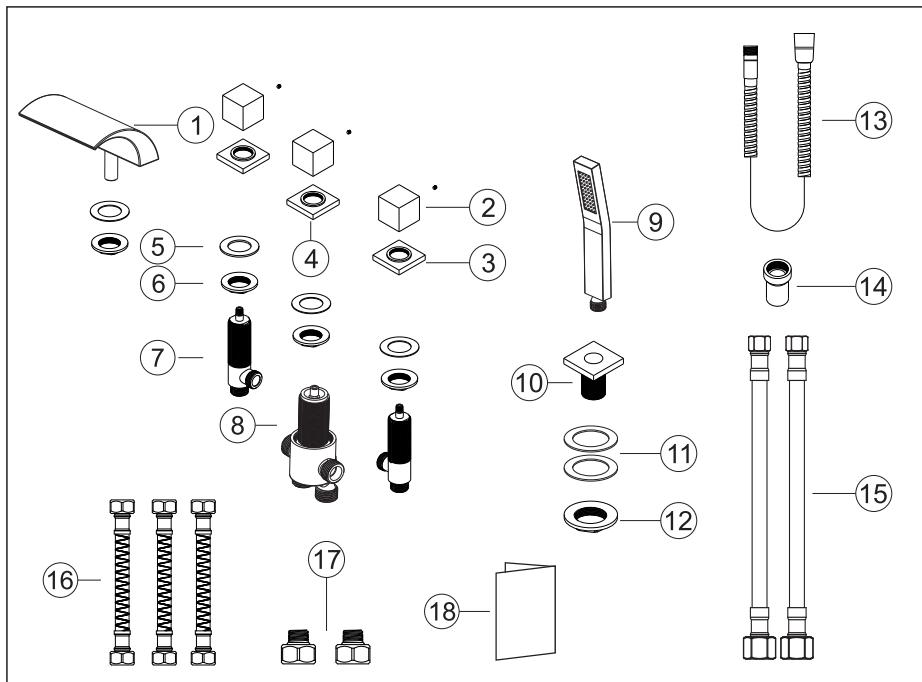

N.º	Nombre de la pieza	Cant	N.º	Nombre de la pieza	Cant
1	Surtidor	1	10	Base de ducha de mano	1
2	Manija	3	11	Junta de arandela de montaje	1
3	Placa de ajuste de la manija	3	12	Tuerca del pedestal de la ducha de mano	1
4	Espiga del surtidor	1	13	Manguera de ducha	1
5	Junta de montaje	3	14	Adaptador de manguera de ducha de mano	1
6	Tuerca de montaje	3	15	Mangueras de agua caliente y fría	2
7	Cuerpo de válvula de la manija	2	16	Manguera de entrada	3
8	Cuerpo del desviador	1	17	Adaptador de manguera de ducha de mano	2
9	Ducha de mano	1	18	Manual de instrucciones	1

## ◆ Instalación del grifo de bañera


### Paso 1

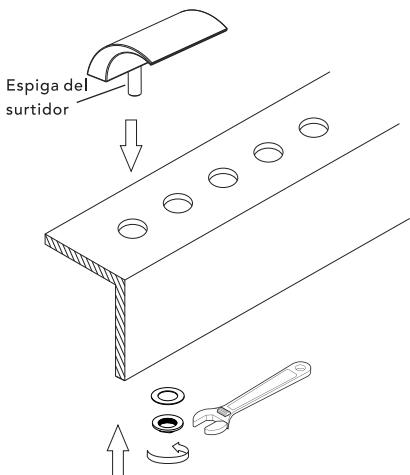

Conecte la espiga del surtidor al surtidor e inserte la espiga del surtidor en la superficie de montaje.

Coloque la junta de montaje y la tuerca de montaje en la espiga del surtidor desde la parte inferior de la superficie de montaje y apriete firmemente, asegurándose de que el surtidor esté en la posición adecuada.


### Paso 2

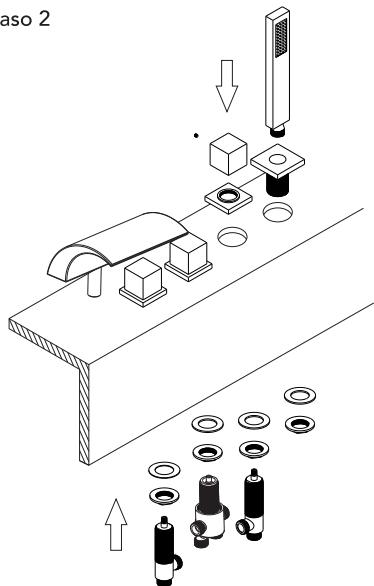

Retire las placas de ajuste de la manija del cuerpo de válvula de la manija y déjelas a un lado. Desde la parte inferior de la superficie de montaje, inserte el cuerpo de válvula de la manija correspondiente (caliente a la izquierda, frío a la derecha) y el cuerpo del desviador. Atornille la placa de ajuste de la manija a la altura deseada para la manija e instálelas. Asegúrese de que las manijas estén en la posición adecuada desde la parte inferior de la superficie de montaje y apriete firmemente. Retire la tuerca de montaje, la arandela y la junta de la base de la ducha de mano. Inserte la base de la ducha de mano en la superficie de montaje. Desde la parte inferior de la superficie de montaje, coloque la junta, la arandela y la tuerca de montaje en la espiga de la base de la ducha de mano y apriete firmemente.


## ◆ Instalación del grifo de bañera

### Paso 3

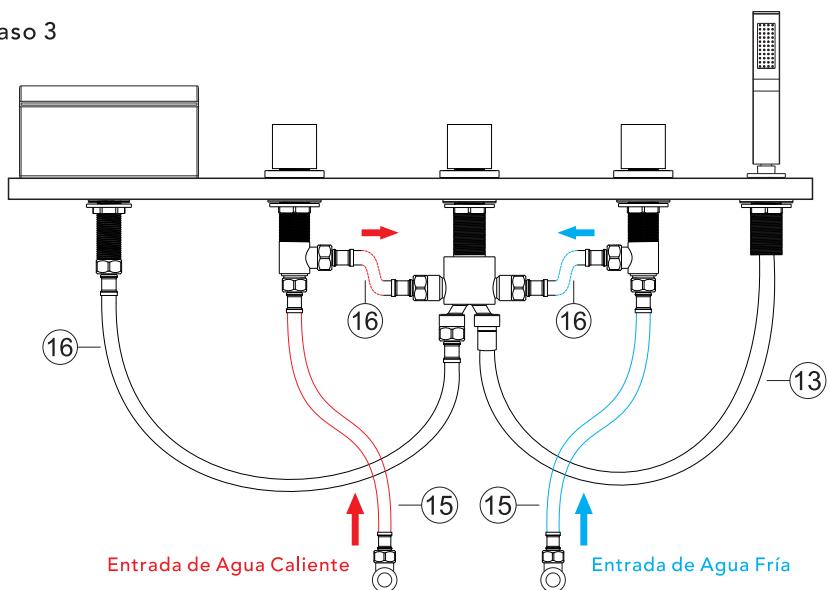

Instale todas las mangueras como se indica en la imagen anterior. Conecte un extremo de las mangueras de entrada a las salidas laterales izquierda y derecha del cuerpo del divisor, y conecte los extremos opuestos de las mangueras de entrada a las salidas laterales de los cuerpos de las válvulas de control de agua fría y caliente. Fije un extremo de la manguera de la ducha al teléfono de ducha y pase el otro extremo a través de la base del teléfono de ducha para conectarlo a la manguera del teléfono de ducha.

### Paso 4

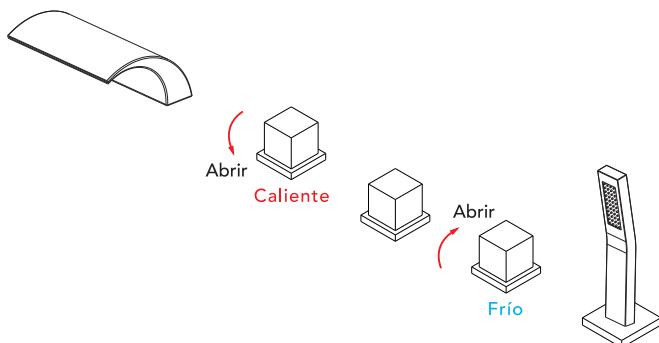

1. Como se muestra en el diagrama, la llave de control de agua caliente gira en sentido antihorario para abrir, mientras que la llave de control de agua fría gira en sentido horario para abrir.
2. La llave central funciona como selector del modo de salida de agua.