

# Assembly Instructions

**Caution: You must read this before you proceed.**

## Care & Maintenance



- Not for commercial use. For residential use only.



- Furniture may scratch floors. We recommend using furniture pads to protect your floors.



- Do not put hot items directly on furniture surface.



- Do not clean furniture with harsh cleansers or polish.



- Do not place furniture under direct sunlight.



- Do not place furniture near heating or cooling vents.



- Do not write on furniture without a padded barrier to protect the surface.



- Do not place furniture outside . For indoor use only.



- Stains may be removed with mild soap solution and damp cloth.




- Children should not climb or jump on the furniture.









- Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in chair seat for hardware packs and legs.

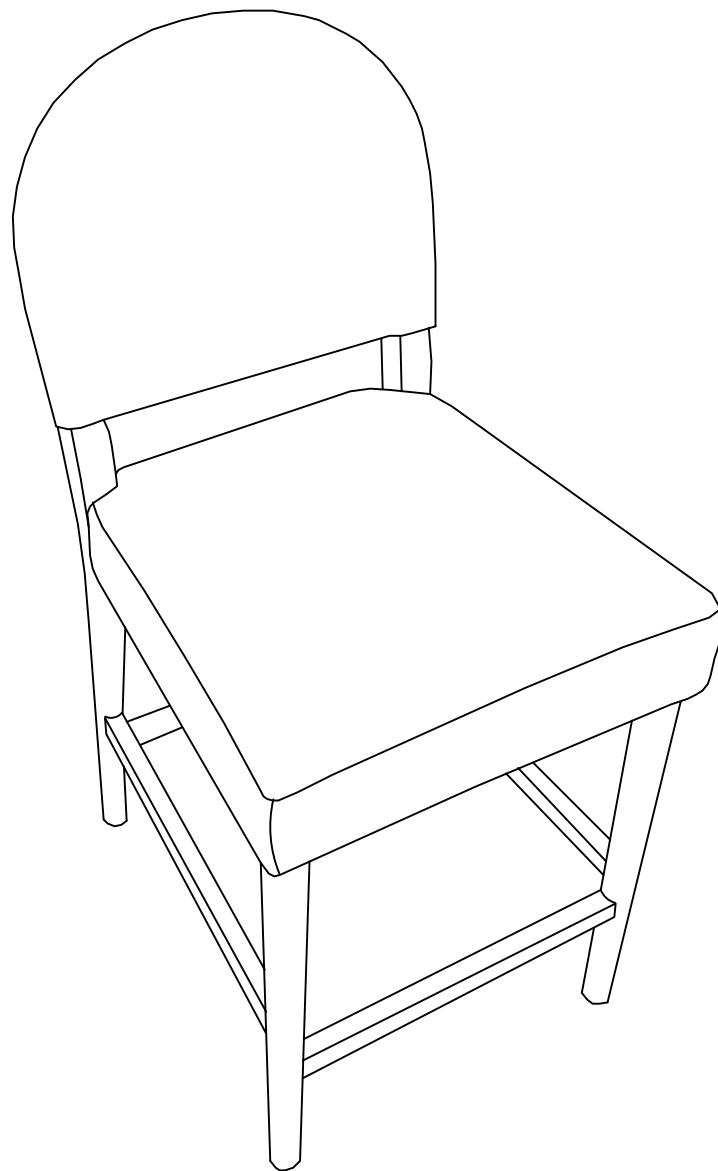

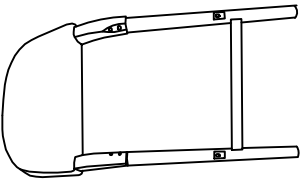


# BARSTOOL



# Parts List


Label	Picture	Description	QTY
A		Chair Back	1
B		Chair Seat	1
C		Left Front Leg	1
D		Right Front Leg	1
E		Front Rail	1
F		Side Rail	2

# Hardware


Label	Picture	Description	QTY
①		Bolt (M8x60mm)	9
②		Bolt (M6x40mm)	7
③		Spring Washer	9
④		Flat Washer	9
⑤		Allen Wrench	1

# Assembly Preparation



Before Beginning Assembly:




A

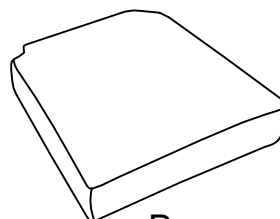

B



①x9




②x7



③x9



④x9



⑤x1



- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-


# Assembly Steps

## Overview

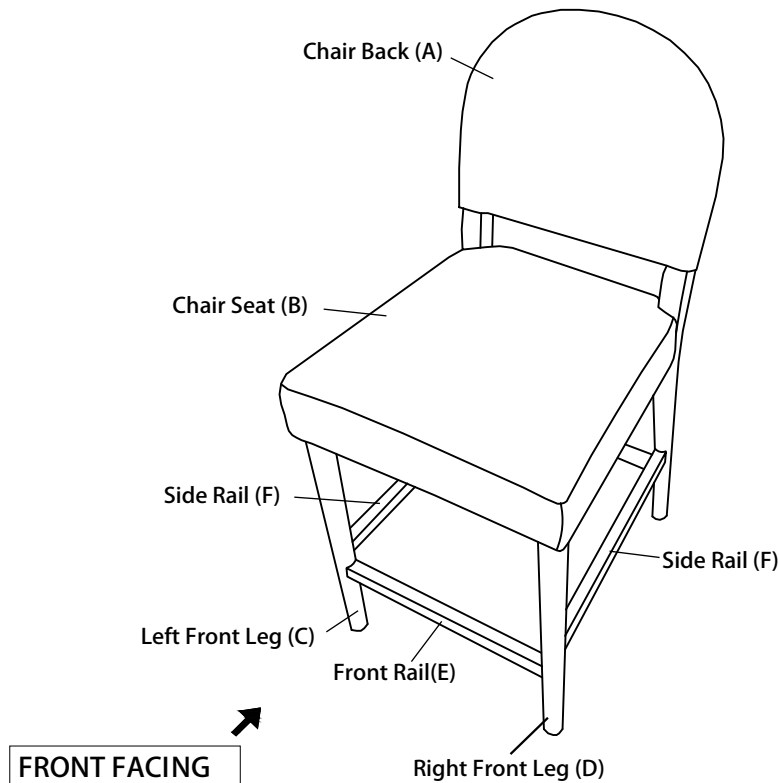


This Barstool has multiple parts and may require up to some 30 minutes to assemble. To give you an overview of the Barstool parts, the above picture is to help you put the various parts into perspective. Please read through the instructions herebelow to familiarise the parts and steps before assembly.

### Step 1

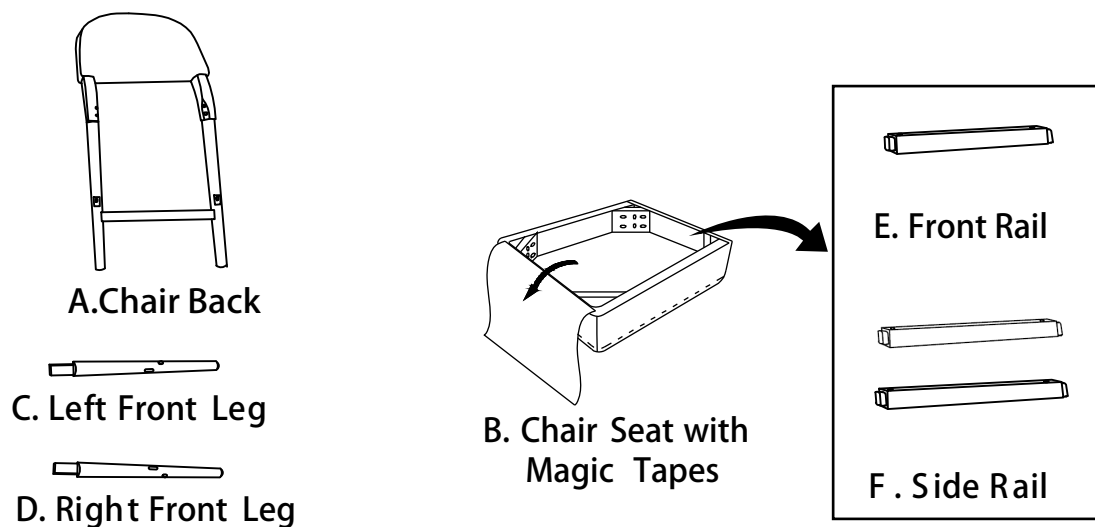

Place the Chair Back(A), Chair Seat(B) and Front Legs(C&D) on a clean, non-marring surface. Remove the Seat Base Cover from the underside of the Chair Seat(B) and take out the Front Rail(E), Side Rails(F) and Hardware.

## Step 2

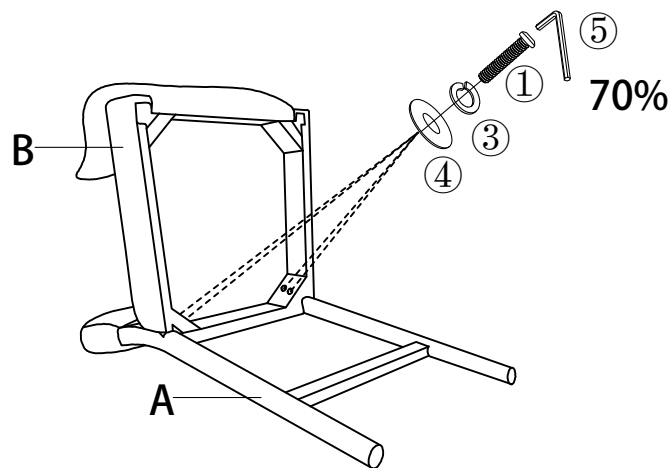


Use your hand to push the Chair Seat(B) firmly into Chair Back(A) to ensure there is no gap between them.

Align the Chair Seat(B) and Chair Back(A) with the holes, and lock them with 4 Bolts(①), 4 Spring Washers( ③) , 4 Flat Washers ( ④) , With Allen Wench(⑤).

**Do not fully tighten the Bolts.**


## Step 3

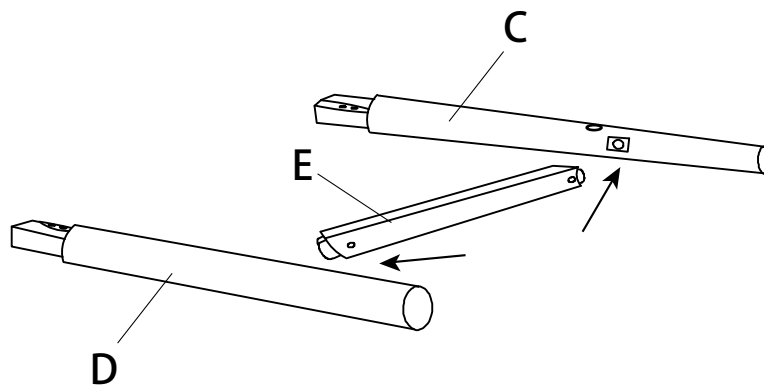


Insert the Front Rail(E) into the holes of the Front Leg(C) and (D).

## Step 4

### Step 4.1

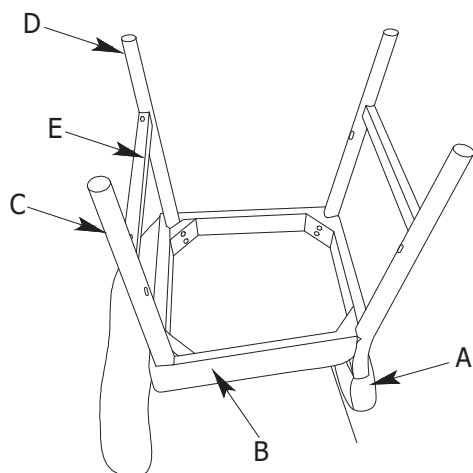

### Step 4.2

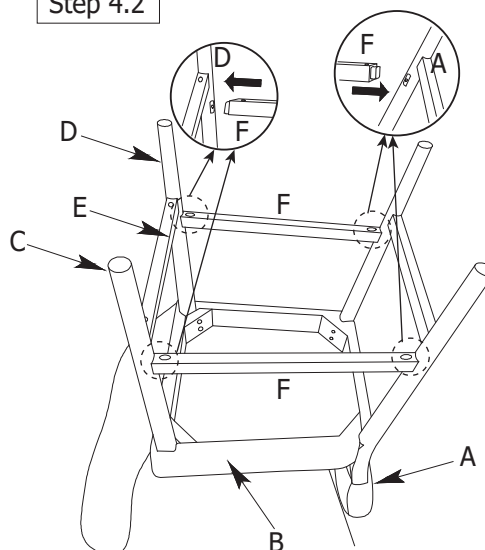


4.1) Insert the Front Leg(C)(D) with the Front Rail(E) installed into the holes of the Chair Seat(B).


4.2) Insert the two Side Rails(F) into the holes of the Front and Back Leg respectively.

## Step 5

### Step 5.1

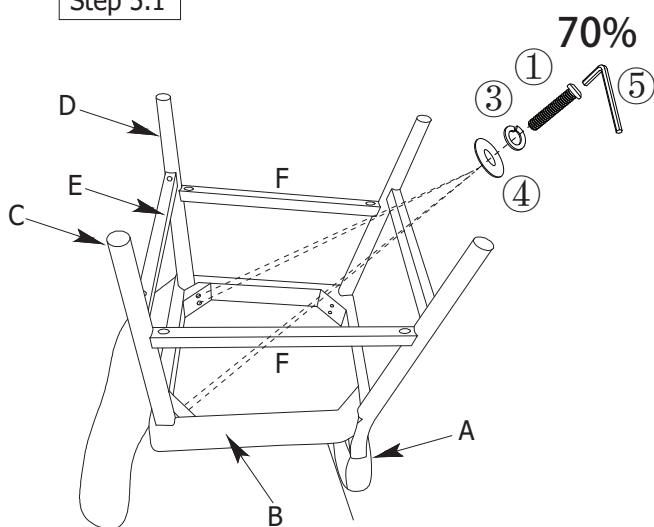

### Step 5.2

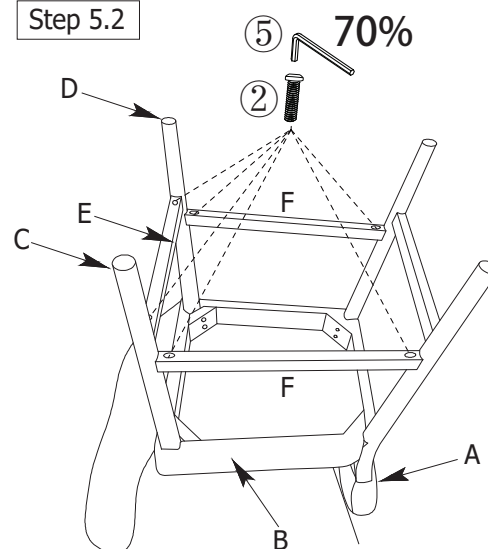


5.1) Align the Front Leg(C)(D) and Chair Seat(B) with the holes, and lock them with 4 Bolts(①), 4 Spring Washers(③), 4 Flat Washers (④), With Allen Wrench(⑤).

5.2) Lock the Front & Side Rails and Front & Back Leg with 6 Bolts ( ②) and Allen Wrench (⑤).

**Do not fully tighten the Bolts.**

### Step 6

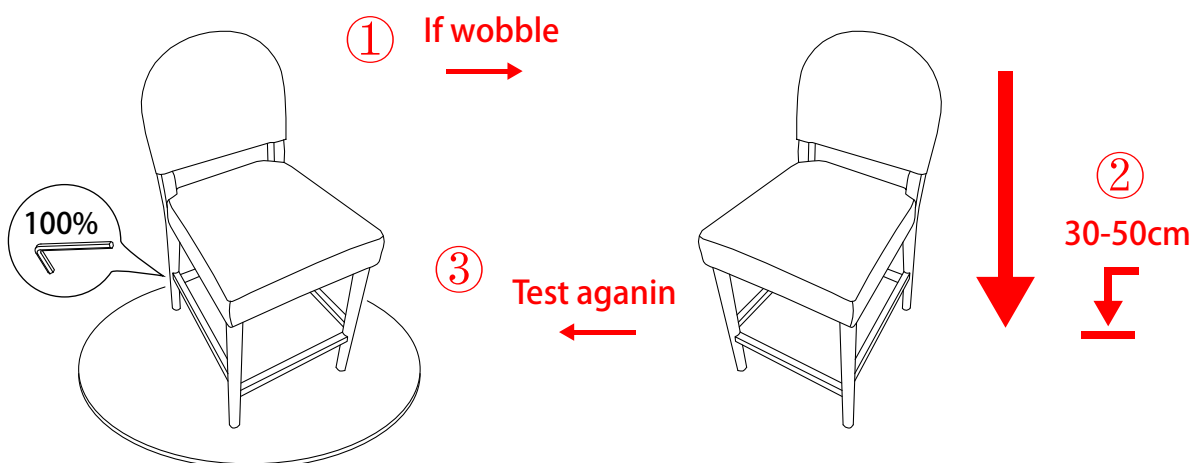

Place the Barstool on a **LEVEL SURFACE** to see if it wobbles.

If it wobbles, lift the Barstool to some 30cm to 50cm height from the ground. Keep your feet and toes well away from the drop zone.

Drop the Barstool freely and vertically with the four legs, hitting the ground, at the same time.

This Drop Test will help to ensure that all the bolts and gaps reach full alignment status.

Test again for evenness on a **LEVEL SURFACE**.

If no wobbles are found, proceed to tighten all the bolts.


**CAUTION :** When tightening these bolts, tighten sequentially.

**DO NOT** tighten any bolt fully and then move towards the next one. This would cause the frame to warp.

If it still wobbles, loosen the bolts and execute this same drop test.

**WARNING!! IF BARSTOOL IS NOT STABLE , IT COULD LEAD TO DAMAGE OF THE PRODUCT.**

### Step 7

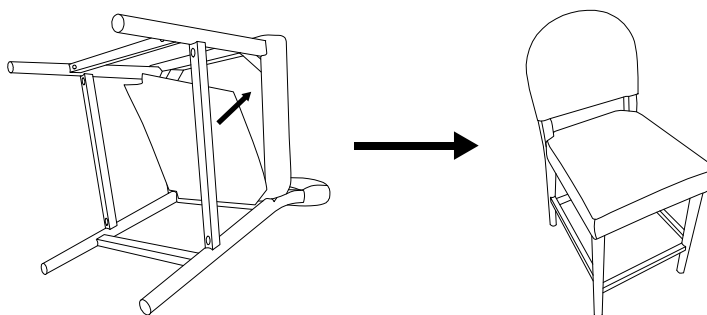


Finally, seal the Seat Base Cover back on to the underside of the chair seat.

Turn it the right side up.

Make sure all parts are connected and securely locked into position.

### Step 8

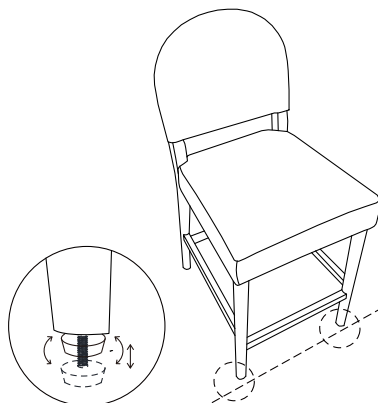

Place the Barstool on a flat surface with four legs. If one leg is uneven, twist and adjust the foot nail. Your Barstool is ready for use.

**This Barstool can only be used on a flat, level surface.**