



The ceiling

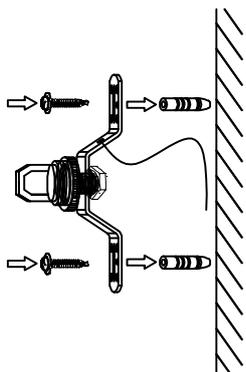


1 Step1 : Disassemble the hanging plate of the lamp, then the hole position of the hanging plate is measured and located on the ceiling by borrowing the hole position of the hanging plate.


2 Step2 : Punch holes in the positioning mark according to the size of the expansion screw, then hammer the expansion screw into the hole with a hammer (leaving one centimeter outside) and then counter clockwise unscrew the nut and insert to lock the hanging plate. (if your ceiling is not concrete but a wooden suspended ceiling, self-tapping screws directly to secure the cross-hanging parallel.

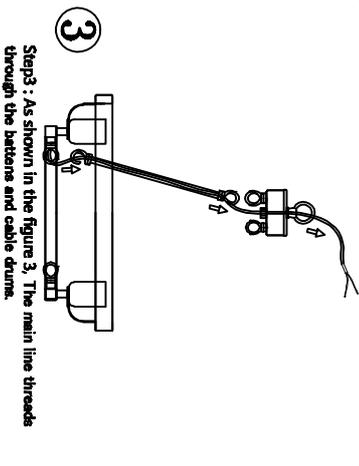


3 Step3 : As shown in the figure 3, The main line threads through the brackets and cable drums.

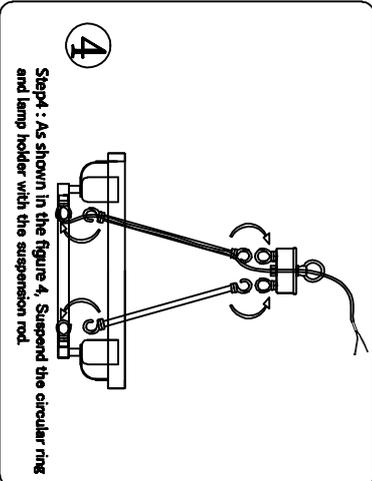

4 Step4 : As shown in the figure 4, Suspend the circular ring and lamp holder with the suspension rod.

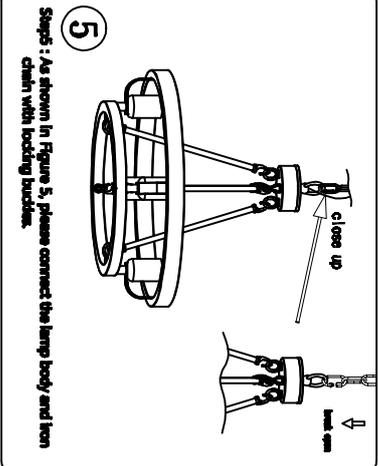


5 Steps : As shown in Figure 5, please connect the lamp body and lens chain with locking buckles.

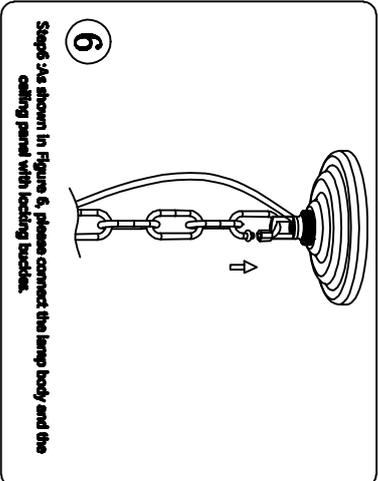

6 Steps :As shown in Figure 6, please connect the lamp body and the ceiling panel with locking buckles.

The ceiling

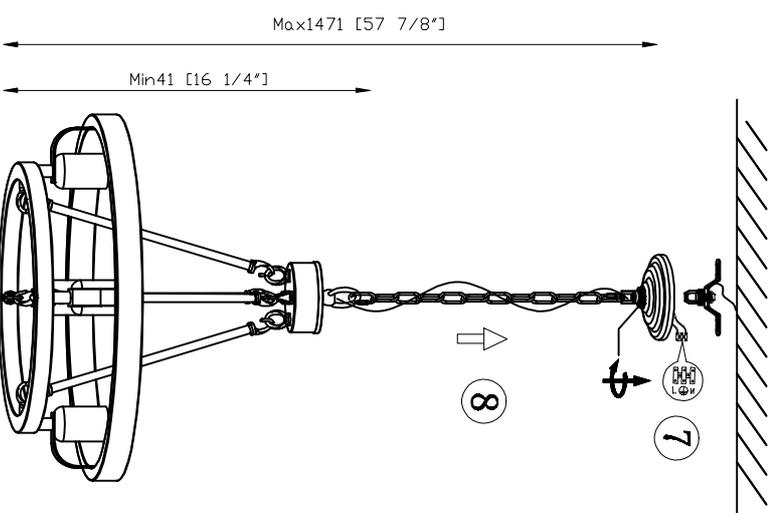


Step 7 : Connect the ground wire properly and switch on the 110V power supply. Check the main wire of the lamp body to see if the lamp can work properly. It is recommended that a professional electrician install this lamp.

Step 8 : Finally, use a circular ring to fix the ceiling-mounted plate firmly on the hanging plate.


part list :



1 pcs



4 pcs



1 pcs



1 pcs



1 pcs



1 pcs