


User's Manual



**Please Do Not Return the Product to the Store.
Contact us with any questions.**

INSTALLATION INSTRUCTIONS

Installation Manual

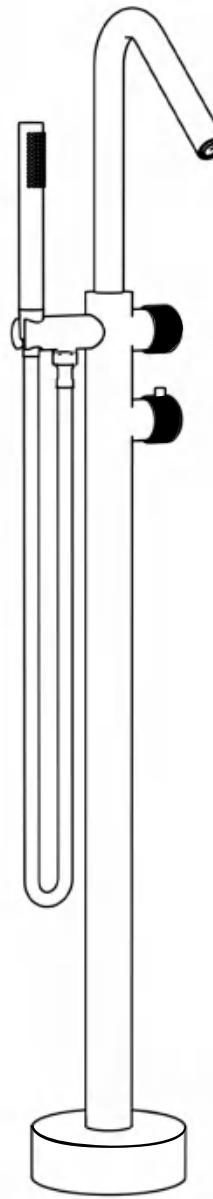

IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 • USA • 909-472-4120 • 909-472-4244 • www.iapmort.org



CERTIFICATE OF LISTING

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at apl.iapmort.org.

Effective Date: December 2018 Rev. 2/26/2020 Valid After: December 2024
Product: Flexible Meter Connectors File No. 5313

Issued To: Fuchs Group Inc.
Mechanical & Electrical
Industrial Hose
Tucson, AZ 85743
Volume: 3150000
China

Identification: Product shall be marked with manufacturer's name or trademark, a statement that it is a flexible meter connector, and the word "ASME". The product shall also have the "ASPE" certification mark. Markings shall be by means of either a permanent mark on the product, a label on the product, or a tag attached to the product.

Characteristics: Flexible outer coverings manufactured on "earthenware, leatherite and metal" flexible fittings for hot or cold water applications that consist of an inner tube, which may or may not have an outer braided cover. Connectors are to be installed for use in accessible locations only. To be installed in accordance with the manufacturer's instruction, and the latest edition of the Uniform Plumbing Code and National Plumbing Code of Canada.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the

Tom Collings
Draeger Products, Inc.

Ron Cheung



IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 • USA • 909-472-4120 • 909-472-4244 • www.iapmort.org



CERTIFICATE OF LISTING

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at apl.iapmort.org.

Effective Date: November 2018 Valid After: November 2024
Product: Plumbing Fixture Fittings File No. 16443

Issued To: Aqua Galaxy Co., Ltd
11th-15th A/B Block
International Overseas
Supply Corp.,
Poole, Dorset, BH12 4BB
England

Identification: Plumbing supply fittings complying with this Standard shall be marked with manufacturer's name, trademark, or other mark, or, in the case of private labeling via name, trademark, or other mark of the customer for whom the fitting was manufactured. The marking shall be accomplished by use of a permanent mark or by placing a permanent label on the product. Markings on plumbing supply fittings shall be visible after installation.

Characteristics: Simple-handle, single-control, and automatic compensating mixing bark and shower valves shall have identifiable temperature control settings in which the settings are indicated by words ("cold", "warm", "hot", etc.), by numbers, or graphically.

Products shall be marked with the manufacturer's name, trademark, or other mark as well as the model number or, as the case of private

Tom Collings
Draeger Products, Inc.

Ron Cheung



IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 • USA • 909-472-4120 • 909-472-4244 • www.iapmort.org



CERTIFICATE OF LISTING

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at apl.iapmort.org.

Effective Date: March 2018 Valid After: March 2024
Product: Plumbing Fixture Fittings - Components File No. MC-49003

Issued To: Ningbo Wanda Ceramic Technology Co., Ltd.
Xiaoshan Zone, China
Penglai, HS800 215539
China

Identification: Each fitting component shall bear permanent legible markings to identify the manufacturer. This marking shall be the trade name, trademark, or other mark known to identify the manufacturer. The product shall also bear all other markings required by the standard. The marking shall be applied as to be visible after installation. The product or packaging shall also bear the UPC® certification mark along with the word "COMPONENT" above.

Characteristics: Plumbing fixture fitting components to be installed in accordance with the manufacturer's instructions and the requirements of the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of UIC/IEC 1733.


Products are in compliance with the following model(s):
Uniform Plumbing Code (UPC®)

Tom Collings

Ron Cheung




Product size

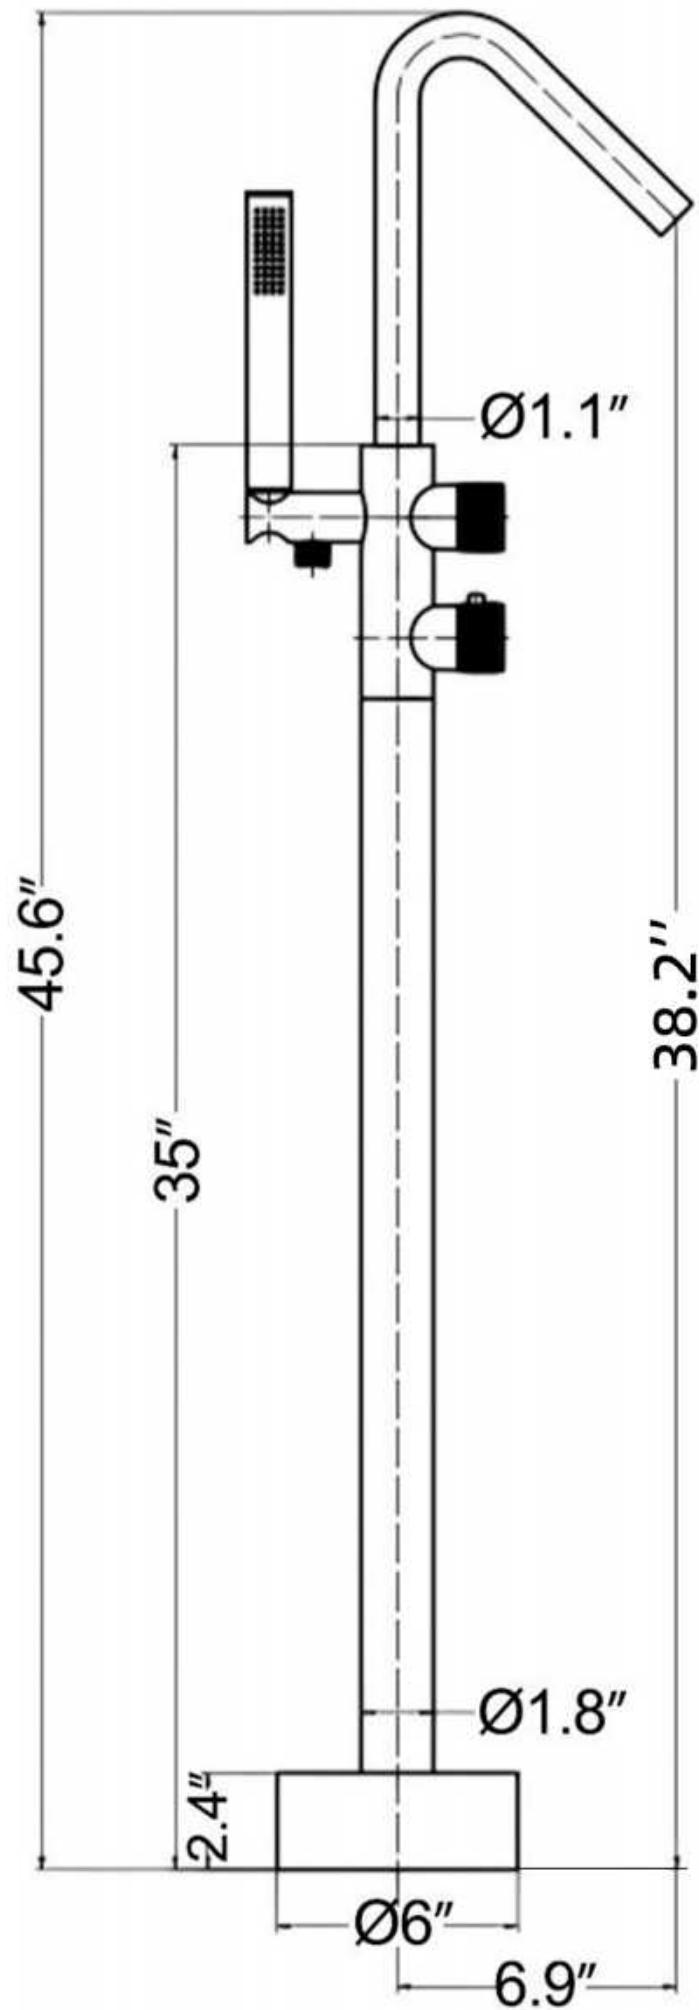


INSTALLATION STEPS


1. The construction of pre-embedded pipes on the ground should follow the diagram below, with the thread of the water outlet being lower than the tile surface.

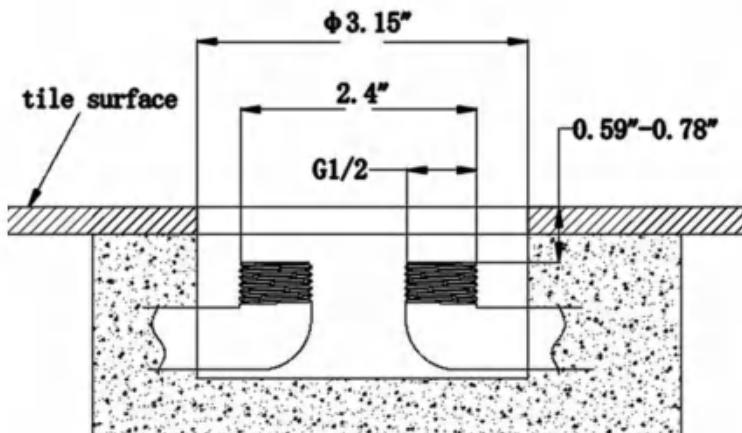


2. Mark the positions for the three claw holes and proceed with drilling. When drilling, please avoid the pre-embedded pipelines. Meanwhile, adjust the direction of the faucet and bathtub, and then install the expansion screws.

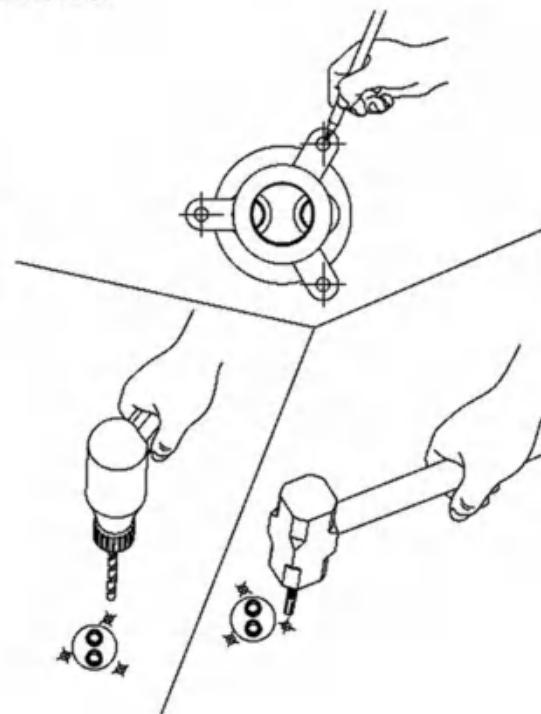

3. Tighten the water inlet pipe onto the main body.

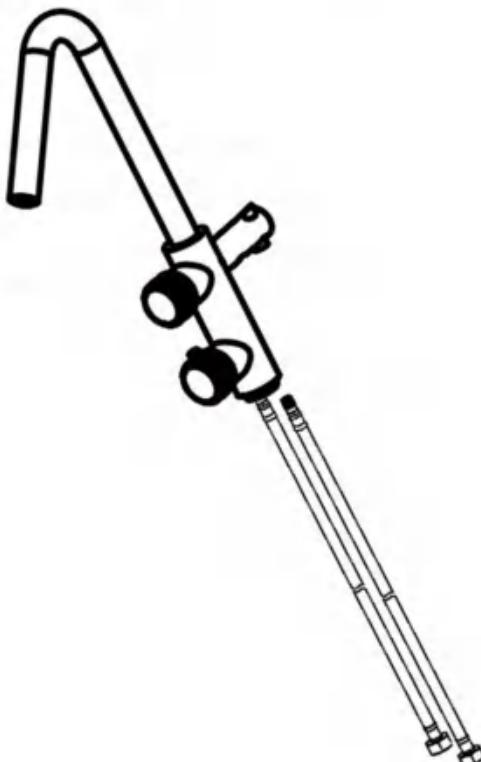


4. Tighten the connecting post again.

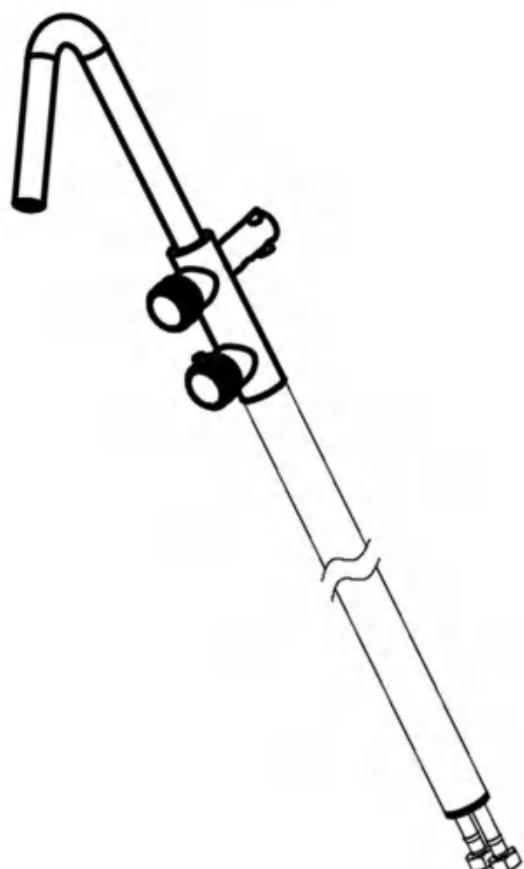


INSTALLATION STEPS


5. Install the bottom cover and the three claws in order. Apply anaerobic adhesive on the threads of the three claws.

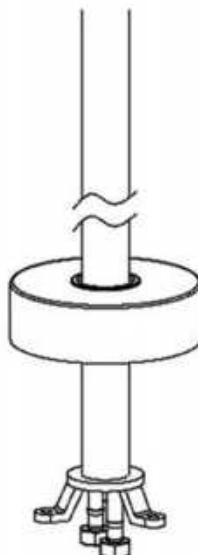

6. Tighten the water inlet pipe, and then lock the three claws securely. (Distinguish between cold and hot water pipes)

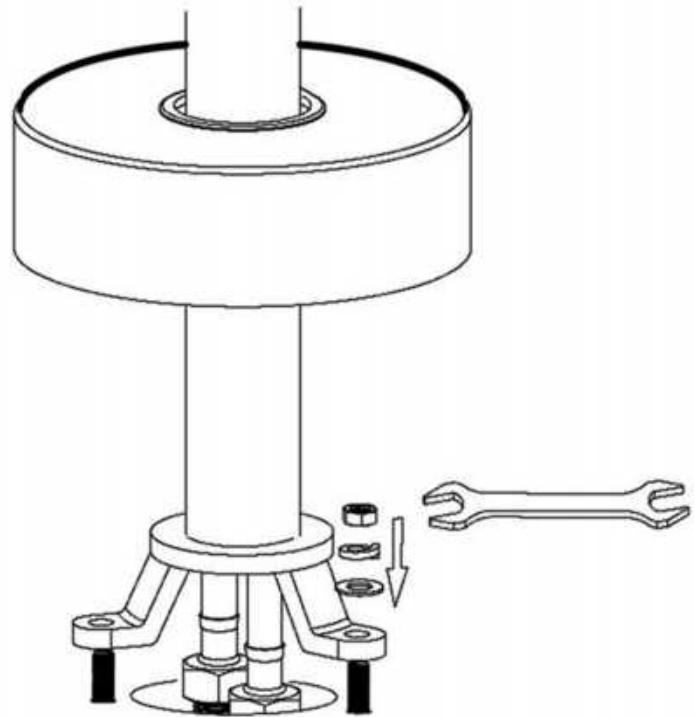

7. Press down the bottom cover to make it flush with the tile surface.

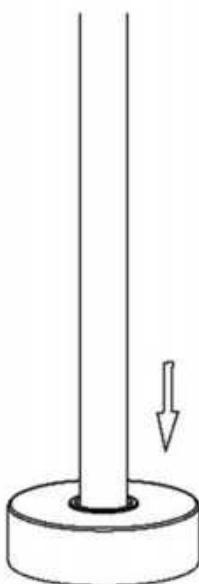


8. Install the handheld shower head and shower hose.



Care and maintenance

To maintain a clean, bright appearance and optimal performance of your shower head, please follow these care instructions:

1. Rinse with water only and dry with a soft cotton cloth.
2. For surface dirt or limescale buildup, use a mild liquid detergent or a colorless, non-abrasive glass cleaner. A non-abrasive polish may also be used.
3. Do NOT use: abrasive detergents or polishes, emery cloth, paper towels, scrapers, etc.
4. Do NOT use: acidic cleaners, or cleaners and soaps containing insoluble granules.
5. Mineral deposits may accumulate in the shower head over time, reducing water flow. If this occurs, unscrew the shower head, rinse it thoroughly with water, and screw it back into place.

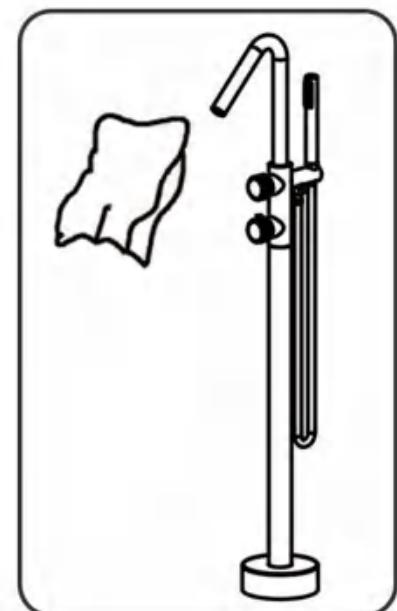



**Please Do Not Return the Product to the Store.
Contact us with any questions.**