


USER'S MANUAL

TALANTON SERIES 36" BATHROOM VANITY

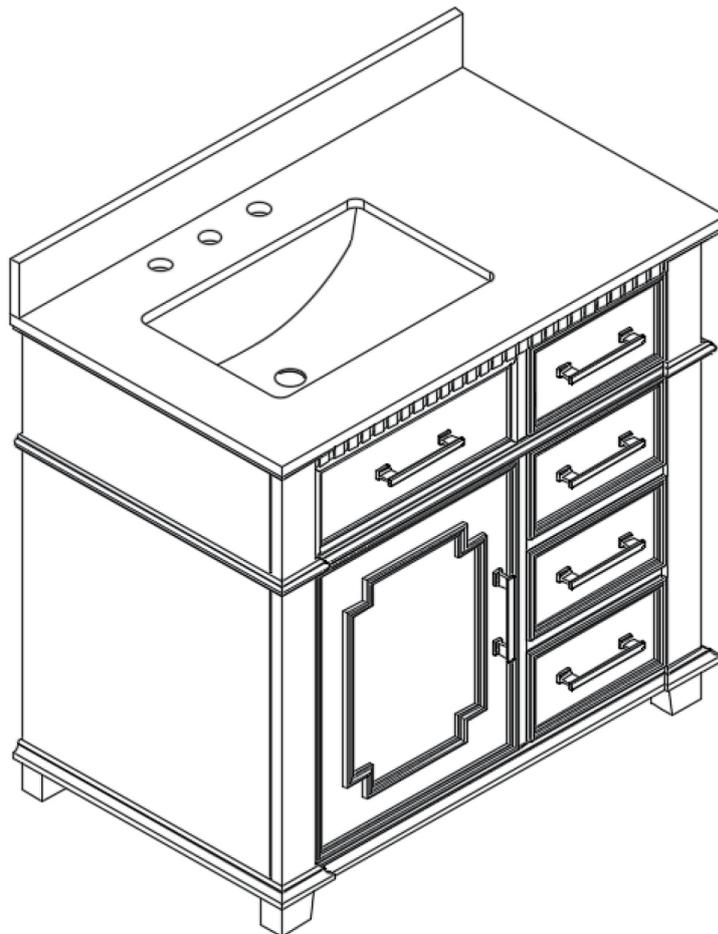

SAFETY PRECAUTIONS

- ★ Thank you for choosing us. We appreciate the trust and confidence you have placed in us and are committed to providing you the best possible product.
As with all none pre-install products, please follow instructions closely and handle with care.
- ★ Tools, hardware, and all other pipeline components like water faucet, drainpipe, neutral silicone sealant, etc. are NOT included.
- ★ Make sure you have checked all packing materials carefully for parts that may have come loose inside the package in the course of transit. If there are any missing parts, please contact Customer Service for assistance.

WARNING

- Base cabinet supports a MAXIMUM weight of 220lbs. Exceeding the maximum weight limit will compromise the integrity of the cabinet structure and could cause the cabinet to fail.
- Two adults carry and place.
- Keep small parts away from children during assembly.
- Do not stand, step, or climb on unit.
- Ensure the vanity is installed on a level floor. Unevenness can cause the vanity to become misaligned, resulting in twisting of the cabinet. Adjust the height with the shims for any unevenness.
- DO NOT use harsh bathroom cleaners or grout cleaners on any natural stone.
- Ensure all building & plumbing codes are respected. Professional installation is recommended.

CAUTION & CLEANING & MAINTENANCE



- USE sealers according to the product-specific directions.
- Stone countertops (Granite, Marble, etc.) are surprisingly resilient to stains and scratches. Any spills on the stone surfaces should be wiped up within a reasonable amount of time. Do Not let the liquid sit on the stone overnight. Stones are most prone to staining by oil and acid, so be sure to blot these spills as soon as they happen. In bathrooms specifically, stone tends to attract soap scum, just like man-made tile. Rinse the vanity top with clean, hot water frequently.
- Vanity: To clean the surface of doors or cabinets, use non-abrasive cleaners and or cleaning agents that do not contain solvents.
- Vanity Top: Your vanity top will remain in its original state if you maintain and clean it properly. Clean the surface with a glass cleaner or other household cleaners that are non-abrasive. Remove oil-based stains with acetone, mineral spirits, or ammonia. Organic stains like coffee, tea, or juice can be removed with hydrogen peroxide, mixed with a few drops of ammonia.
- Place protective pads on the bottoms of any heavy objects, such as pottery, appliances, or other objects that may scratch the marble surface.
- Avoid abrasive cleaners or rough cleaning pads. If necessary, you can use a soft buffing pad.
- Dust the vanity regularly with a soft, non-lint producing cloth or household dusting product.
- You can clean the vanity with a gentle, non-abrasive household cleaner.
- Make sure to dry the wood immediately with a soft cloth or towel.
- The stone top can be cleaned using standard marble cleaning agents available at your local supplier.
- Use caution placing items such as soap or any fragranced material on the stone surface. Use a soap dish, coaster or similar item to protect the surface if placing any soap or fragranced products on the stone.
- If soap or fragranced products come in contact with the stone top, rinse the surface with water and dry using a soft non-abrasive cloth.
- DO NOT use products to clean the stone top that contain acetone, lemon, vinegar or other acids as these may cause damage to the stone surface.
- This vanity top is pre-sealed at the factory, periodically reseal is required. As it is porous and various by nature, more frequent application is recommended and may be required depending on the usage. Follow sealer manufacturer's recommendation.
- Stone care products are available at your local home center store. Follow the manufacturer's directions on how to use.

**⚠ MAX WEIGHT CAPACITY: 220LBS
DO NOT STAND, STEP, OR CLIMB ON UNIT.**

Parts and Hardware List:


- Make sure all parts are in the package.
- Tools, hardware, and all other pipeline components like water faucet, drainpipe, neutral silicone sealant, etc. are NOT included.

Parts List

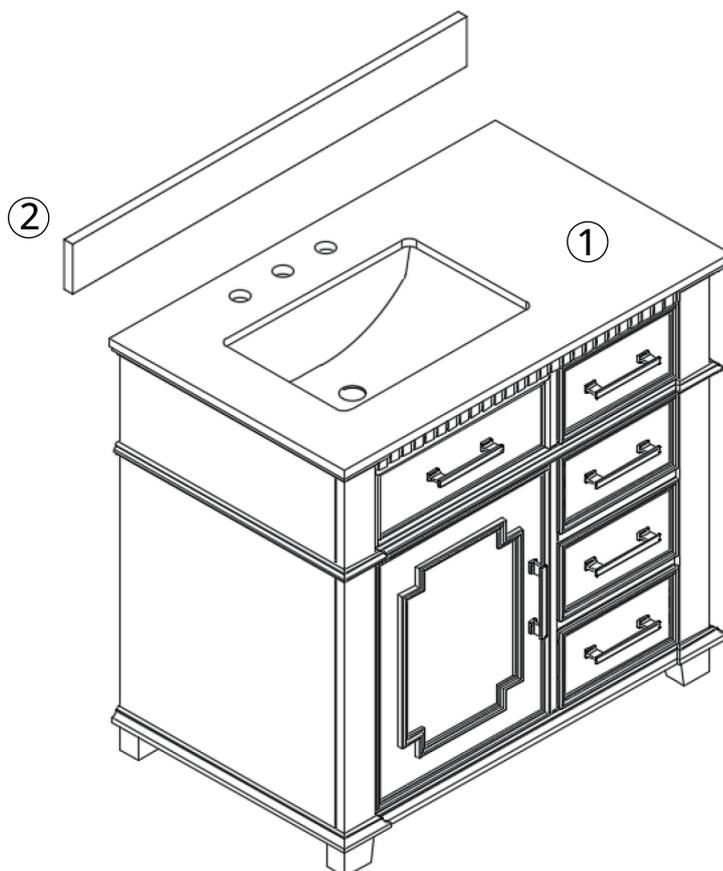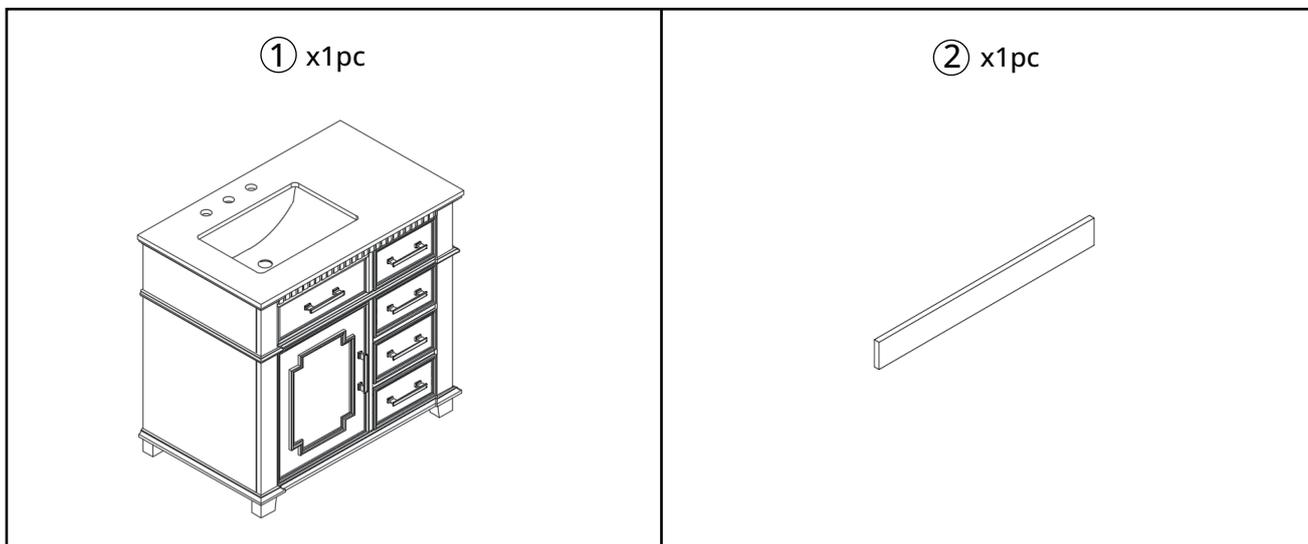


1

Determine location where you would like to install your vanity.

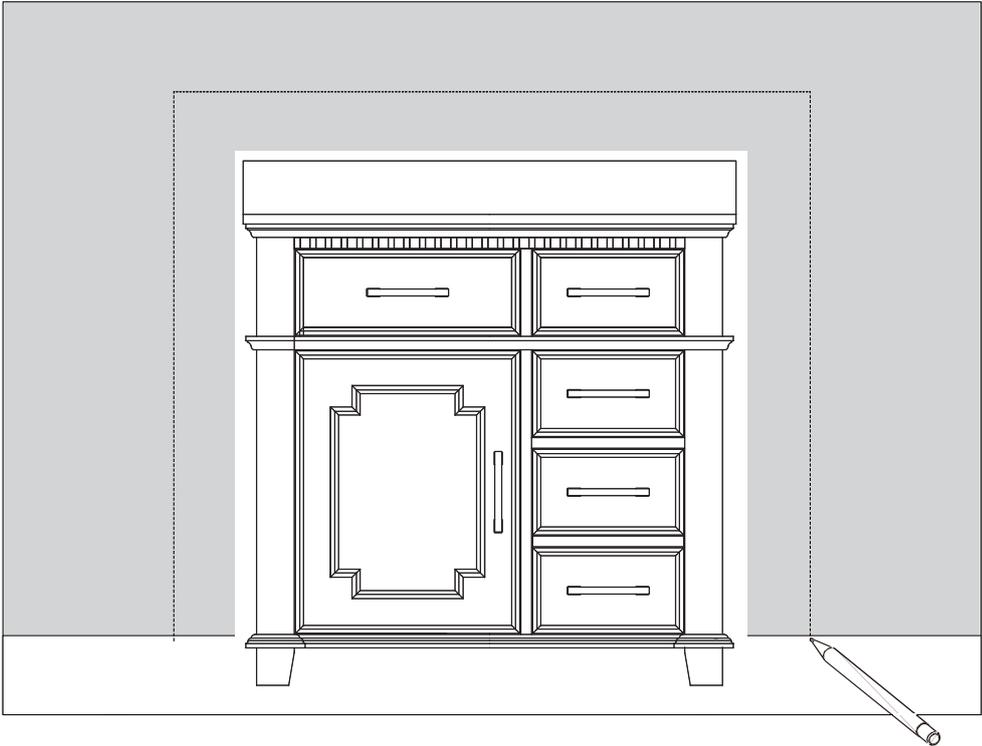

2


Place vanity in the installation area. Check that vanity cabinet is level.

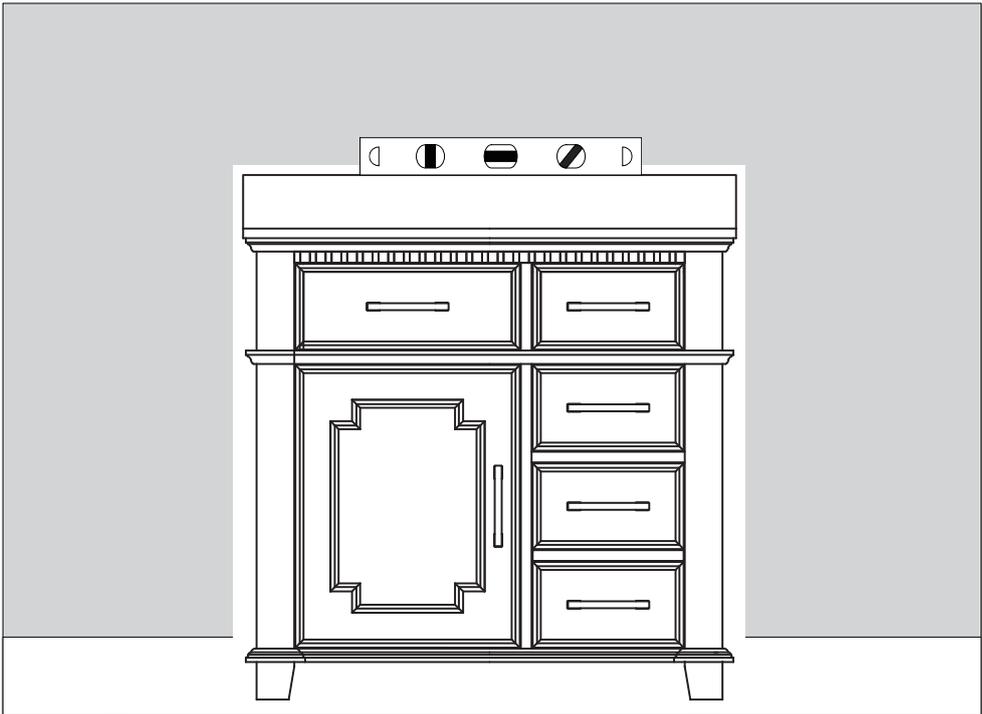

3


Unpack this bathroom vanity cabinet, engineered top and cabinet body remain unglued however there will be no problem for daily use. Or you can also glue the top with cabinet through below instructions:

Apply a bead of adhesive silicone onto each edge of cabinet top.
You can leave the EVA buffer strip or tear it off, before gluing the top.

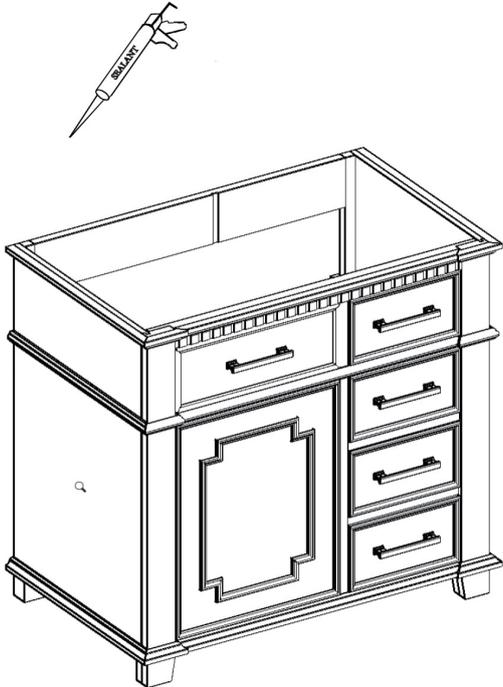


4

Place vanity top onto the cabinet, making sure vanity is seated properly.

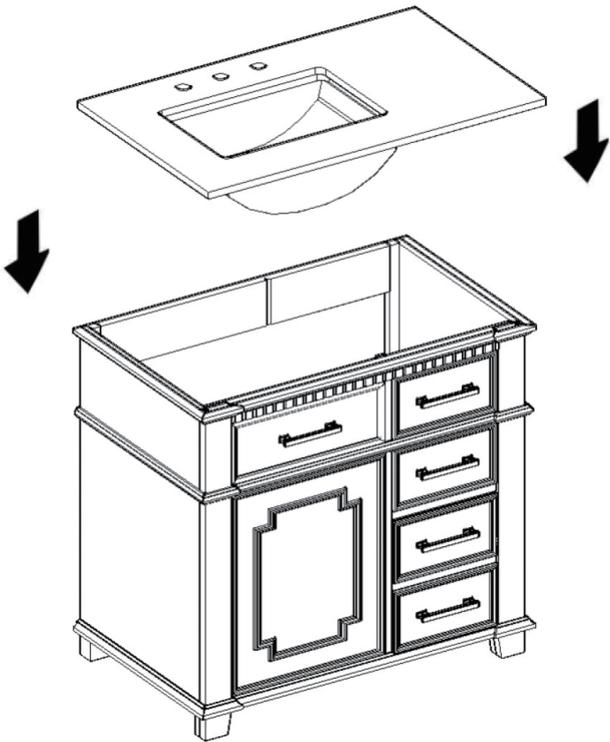


5

To mount ② to the wall, apply a thin bead of silicone compound (not included) to the unpolished back side and bottom of backsplash ② and against the wall. Clean any excess silicone compound before allowing to dry.

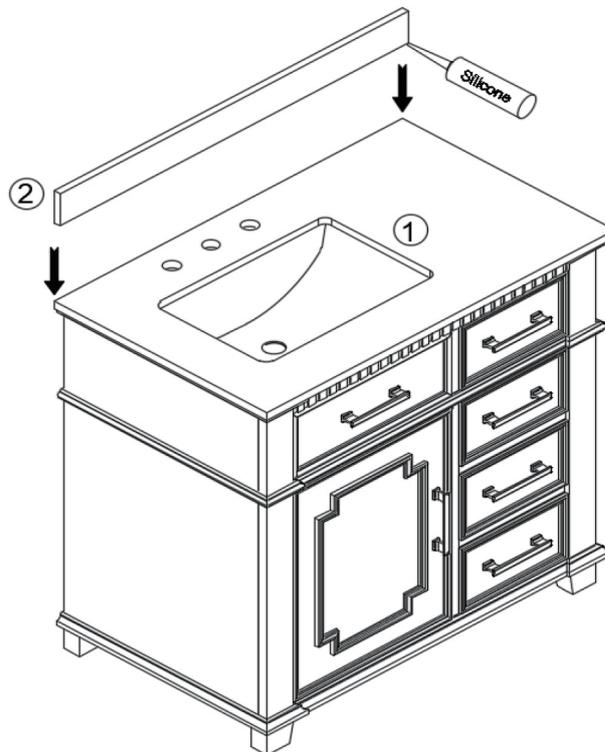

6


Do not use the vanity for at least 24 hours, in order to allow the glue to cure fully.

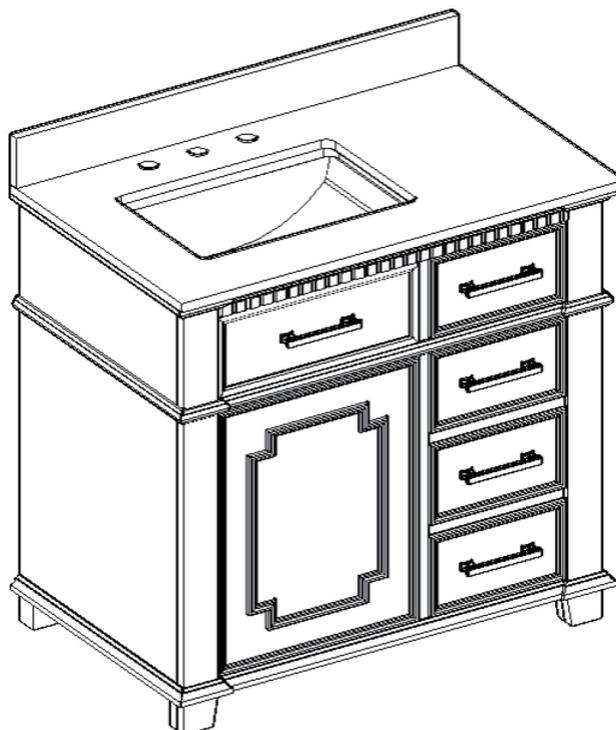

Tip1

Vanity Drawer Removal


- 1a. Open the preassembled drawer as far as possible.
- 1b. Simultaneously press the plastic cards on the bottom of drawer left side and right side inward.
- 1c. Once both plastic cards are held in the indicated position, pull the drawer straight out.

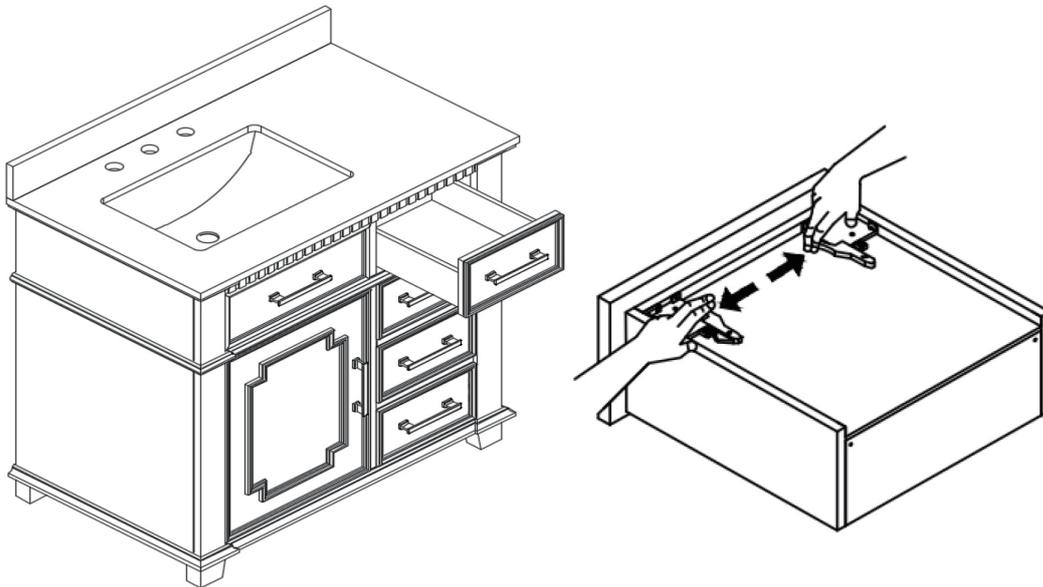

Tip2

Adjustable Level



- 2a. In case of uneven floors, floor levelers are provided at the bottom of the vanity. If necessary, adjust floor leveler by hand to correct tilting and/or level doors.

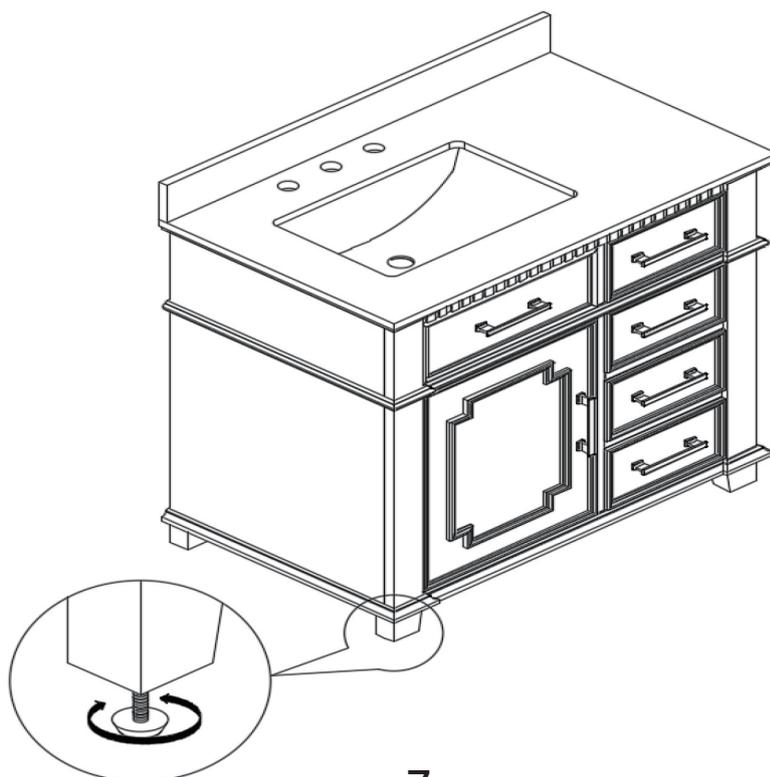



Tip3

Hinge/Door Adjustment



3a. Up and down adjustment

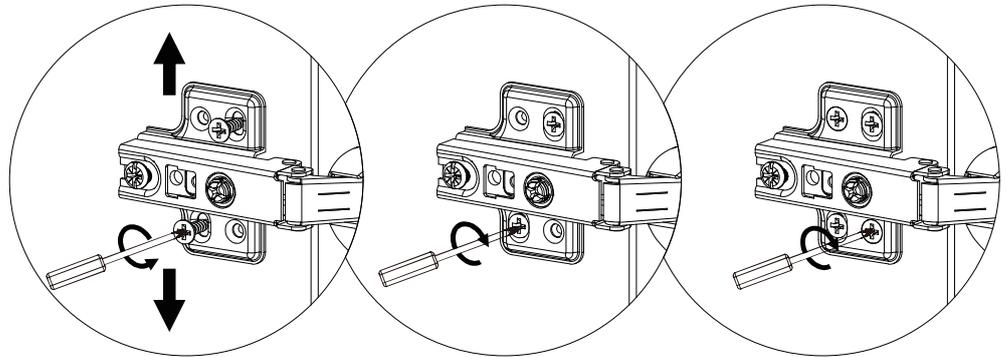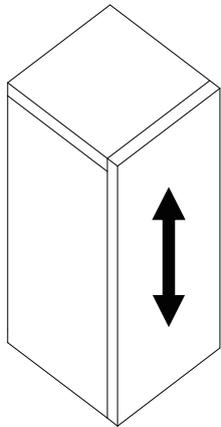

3b. In and out adjustment

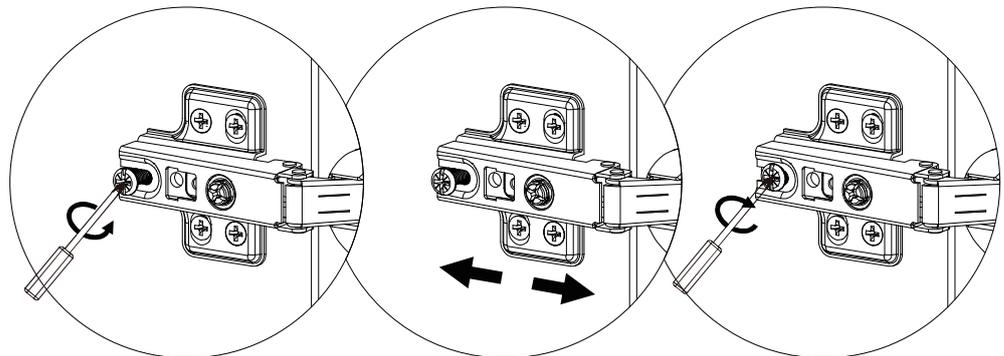
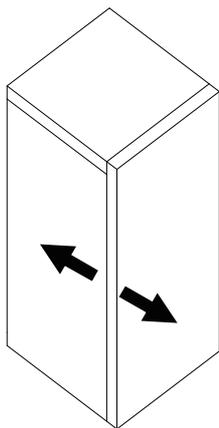


3c. Left and right adjustment

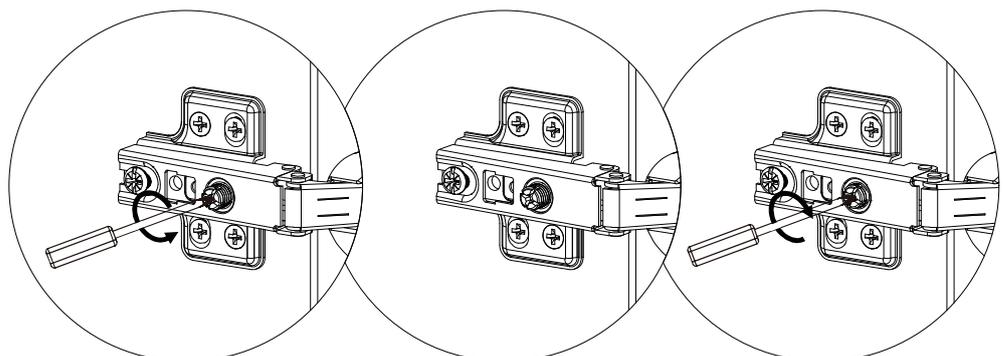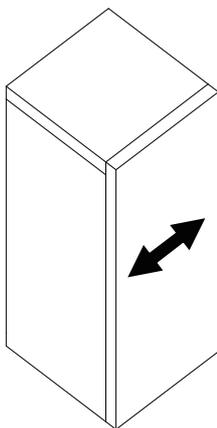

Tip4

The board inside the drawer is designed to hold the hair dryer. If removed additional items such as toothpaste, toothbrushes, and towels can be stored.

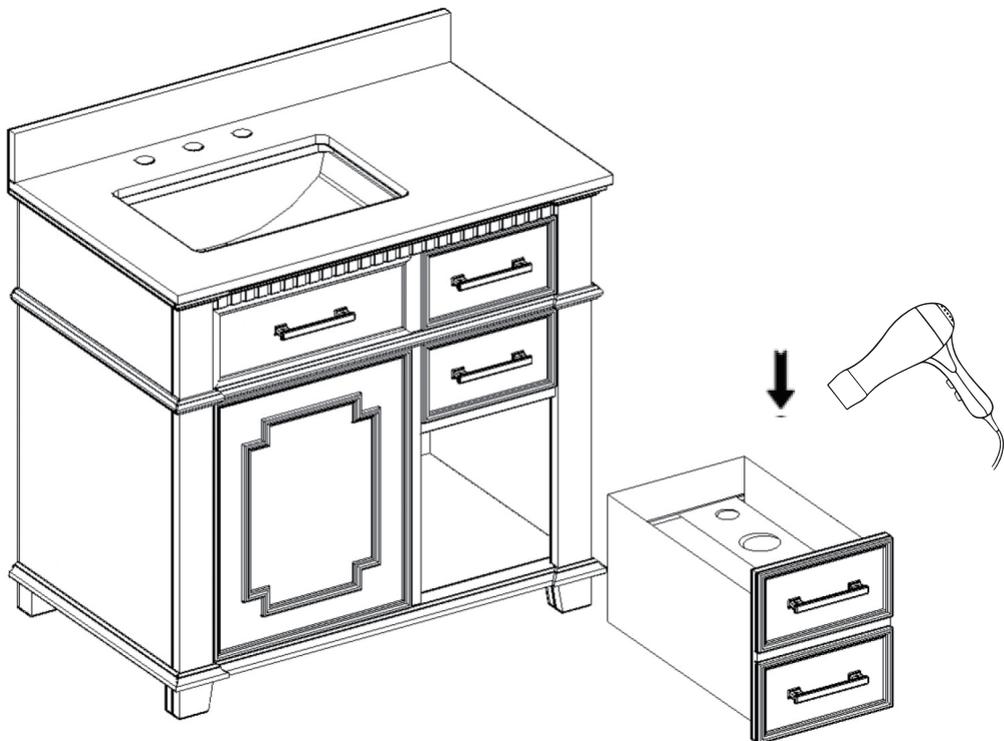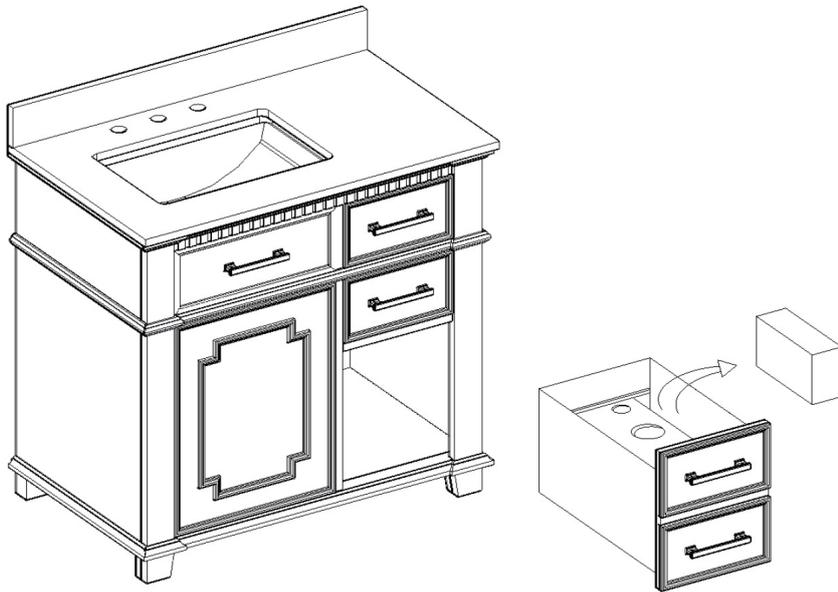

FINISHED

