

# Assembly Instructions

**Caution : You must read this before you proceed**

## Care & Maintenance



- Not for commercial use. For residential use only.



- Furniture may scratch floors. We recommend using furniture pads to protect your floors.



- Do not put hot items directly on furniture surface.



- Do not clean furniture with harsh cleansers or polish.



- Do not place furniture under direct sunlight.



- Do not place furniture near heating or cooling vents.



- Do not write on furniture without a padded barrier to protect the surface.



- Do not place furniture outside . For indoor use only.



- Stains may be removed with mild soap solution and damp cloth.




- Children should not climb or jump on the furniture.





- Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in boxes for hardware packs and legs.

# SOFA(N765P423836)

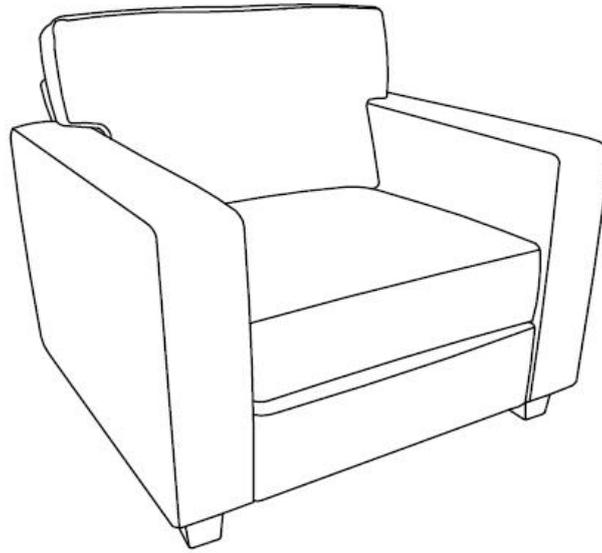

## Parts List


Label	Picture	Description	QTY
A		Backrest	1
B		Back Cushion	1
C		Back Cushion Cover	1
D		Backrest Bottom Support Rail	1
E		Seat Frame	1
F		Seat Cushion	1
G		Seat Cushion Cover	1
H		Left Armrest	1
I		Right Armrest	1
J		Leg	4

# Hardware

Label	Picture	Description	QTY
①		Bolt (M8X40mm)	11
②		Bolt (M6X16mm)	5
③		Spring Washer	11
④		Flat Washer	11
⑤		Flat Washer rings	5
⑥		U-shaped Insert	2
⑦		Allen Wrench*M8	1
⑧		Allen Wrench*M6	1

# Assembly Preparation

Before Beginning Assembly:

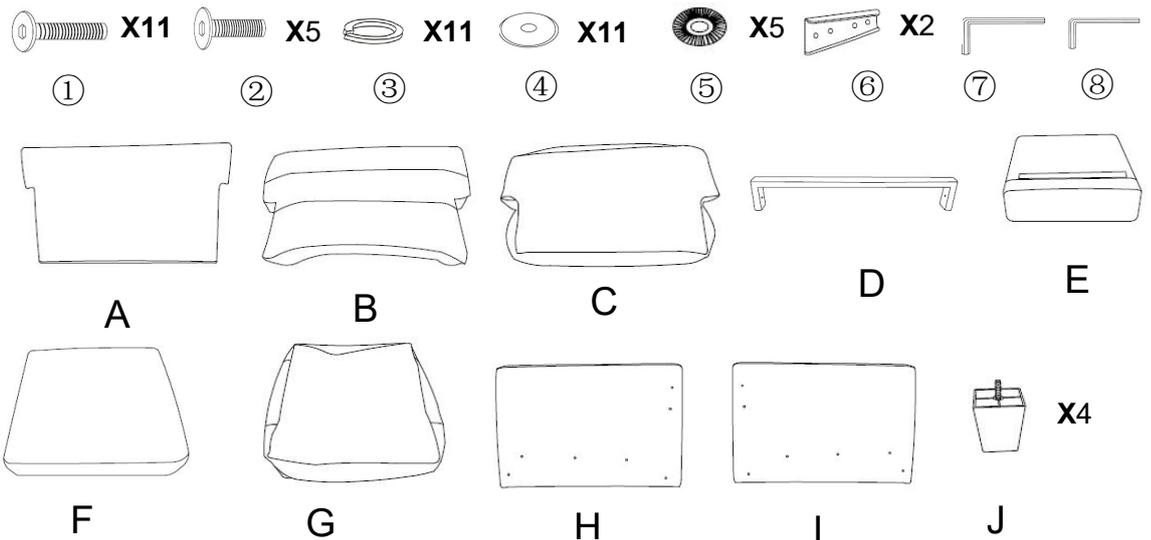

- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-

# Assembly Steps


## Overview

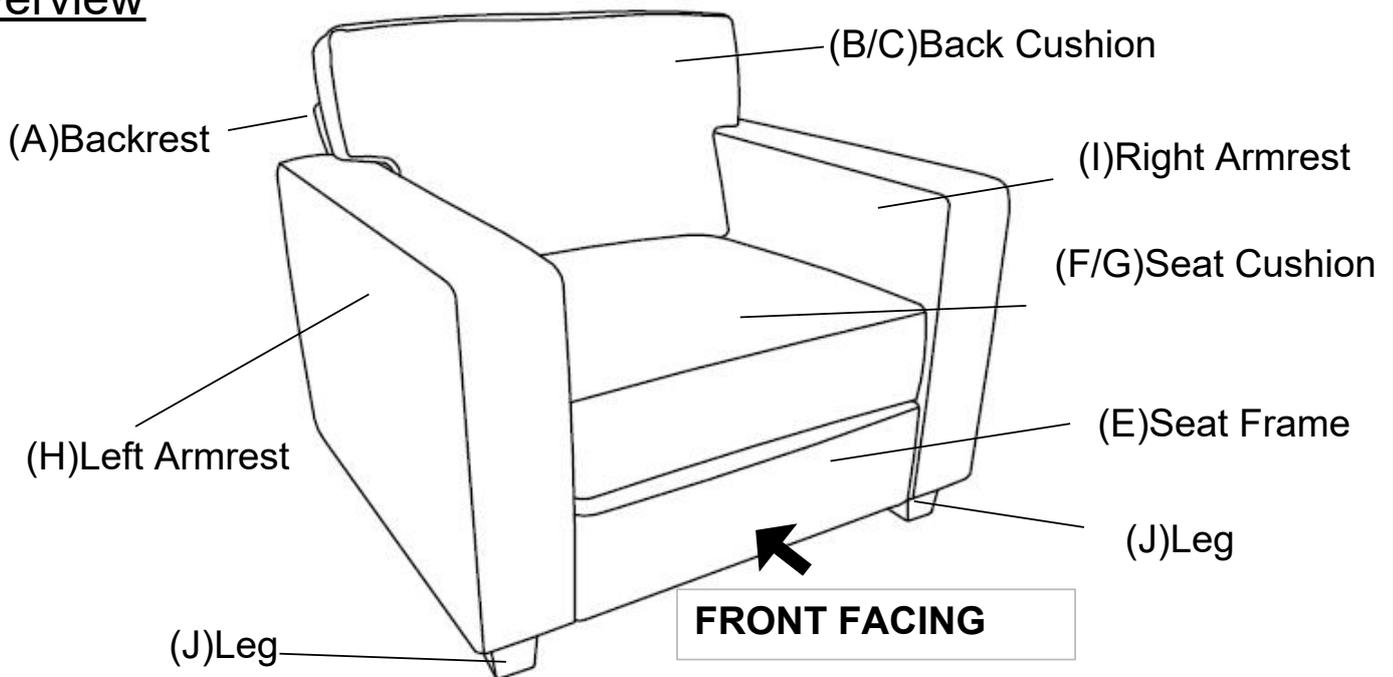

This Chair has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Chair parts, the above picture is provided to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

Friendly reminder: Tighten all the screws after all holes are installed.

## Step 1

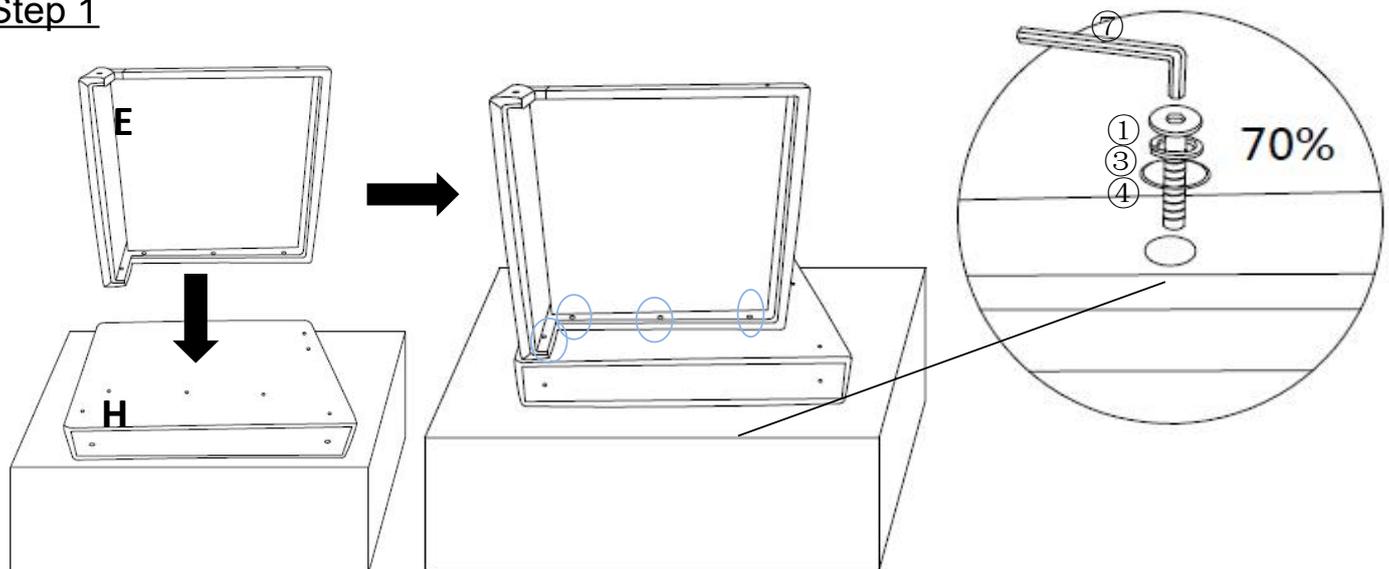

Open the carton, and place all parts on a clean, non-marring surface.


Take out Seat Frame(E) and Left Armrest(H).

Align the holes on Left Armrest(H) with those on Seat Frame(E) as shown.

Use Bolt(①), Spring Washer(③), Flat Washer(④) with Allen Wrench\*M8(⑦) to lock it .

**Do not fully tighten the Bolts.**

## Step 2

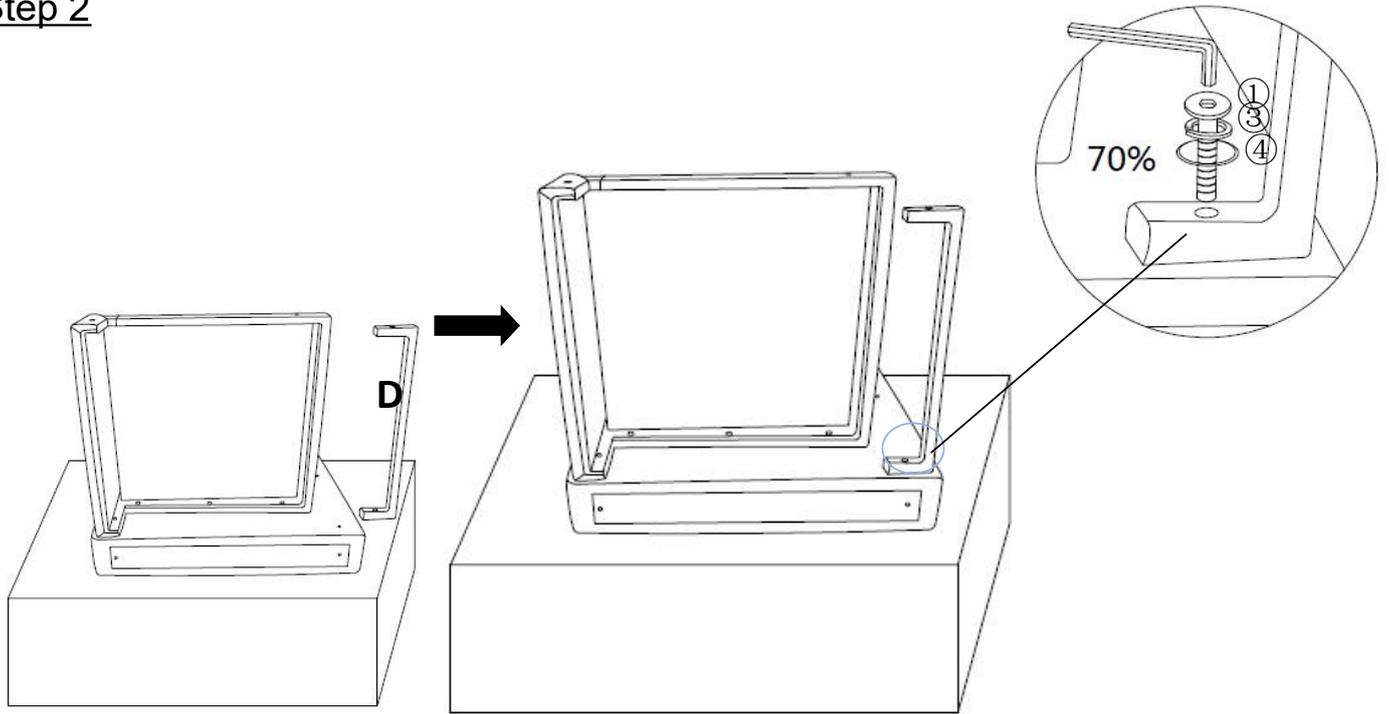


Take out Backrest Bottom Support Rail(D).

Align the holes at one end of support rail(D) with the exposed holes on the armrest.

Use Bolt(①),Spring Washer(③),Flat Washer(④) with Allen Wrench\*M8(⑦) to lock it .

**Do not fully tighten the Bolts.**

## Step 3

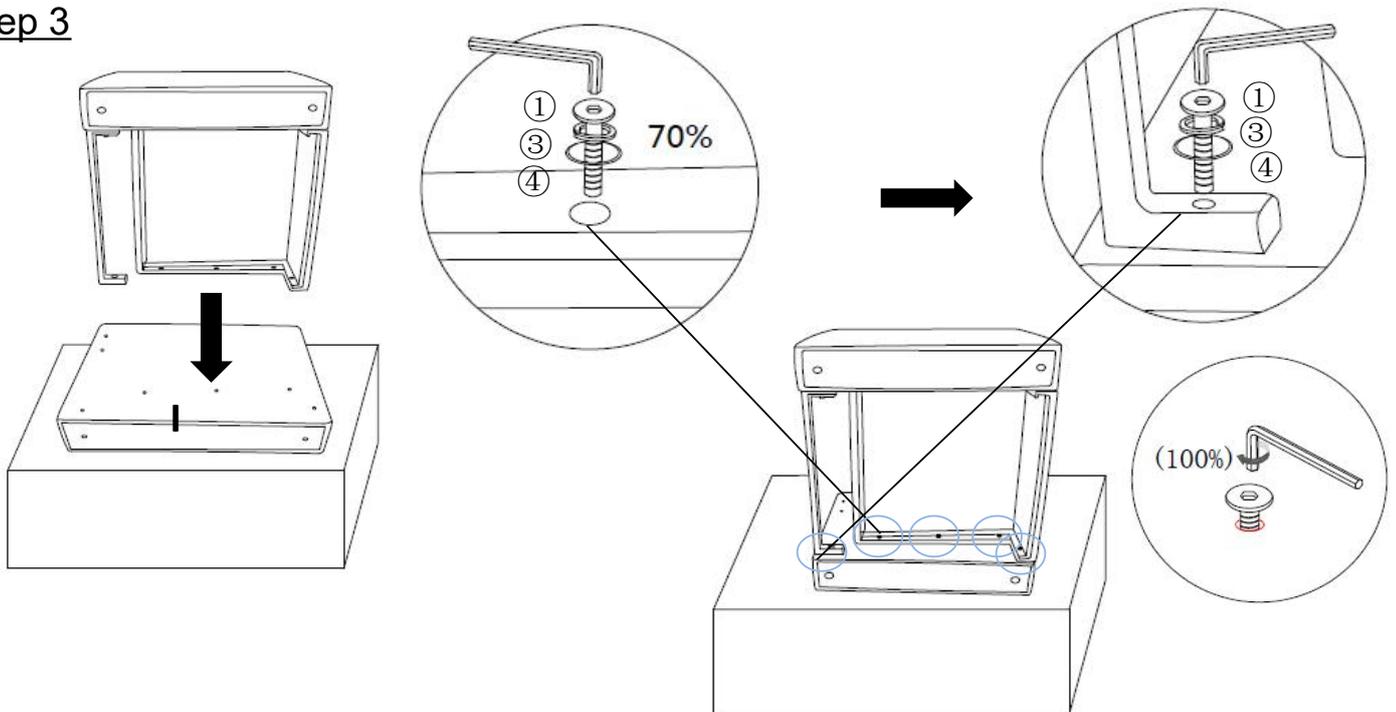

Take out Right Armrest(I).


Align the holes on the previously assembled frame with those on the Right Armrest(I) as shown.  
Use Bolt(①),Spring Washer(③),Flat Washer(④) with Allen Wrench(⑦) to lock the middle three holes.

**Do not fully tighten the Bolts.**

Use Bolt(①),Spring Washer(③),Flat Washer(④) with Allen Wrench(⑦) to lock Support Rail(D).


**Then fully tighten all the Bolts.**

### Step 4

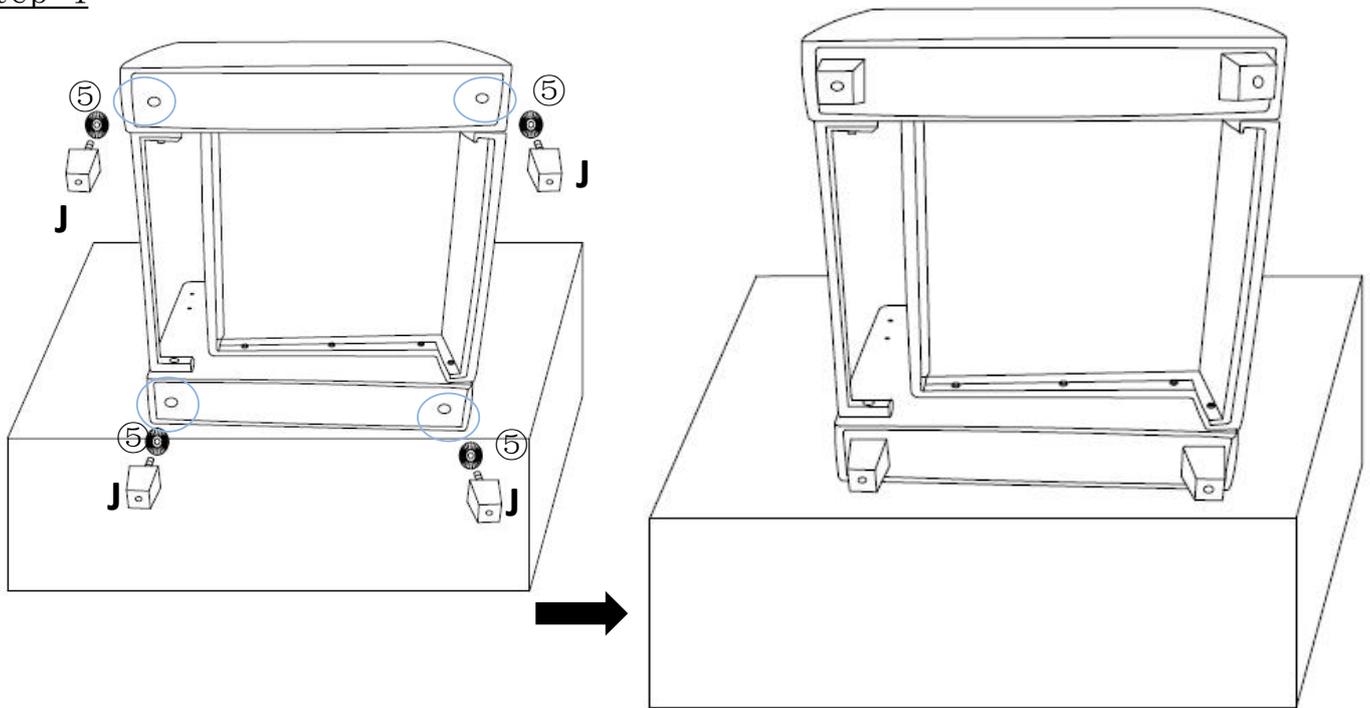


Take out Leg(J)  
Insert the Flat Washer rings(5)  
Then screw the Leg(J) to the Frame and gently tighten the legs.

### Step 5

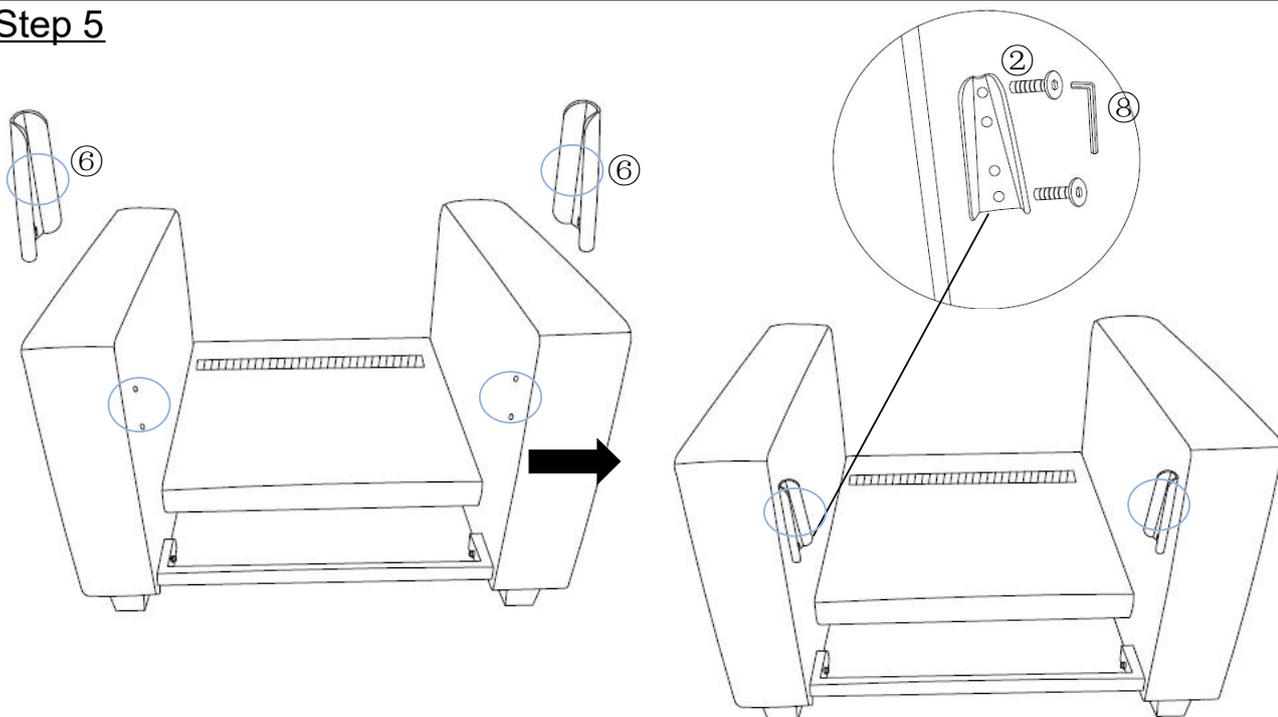

Take out U-shaped Insert(6).  
Note that the small end should face upwards as shown.  
Use Bolt(2) with Allen Wrench\*M6(8) to tighten it.

## Step 6

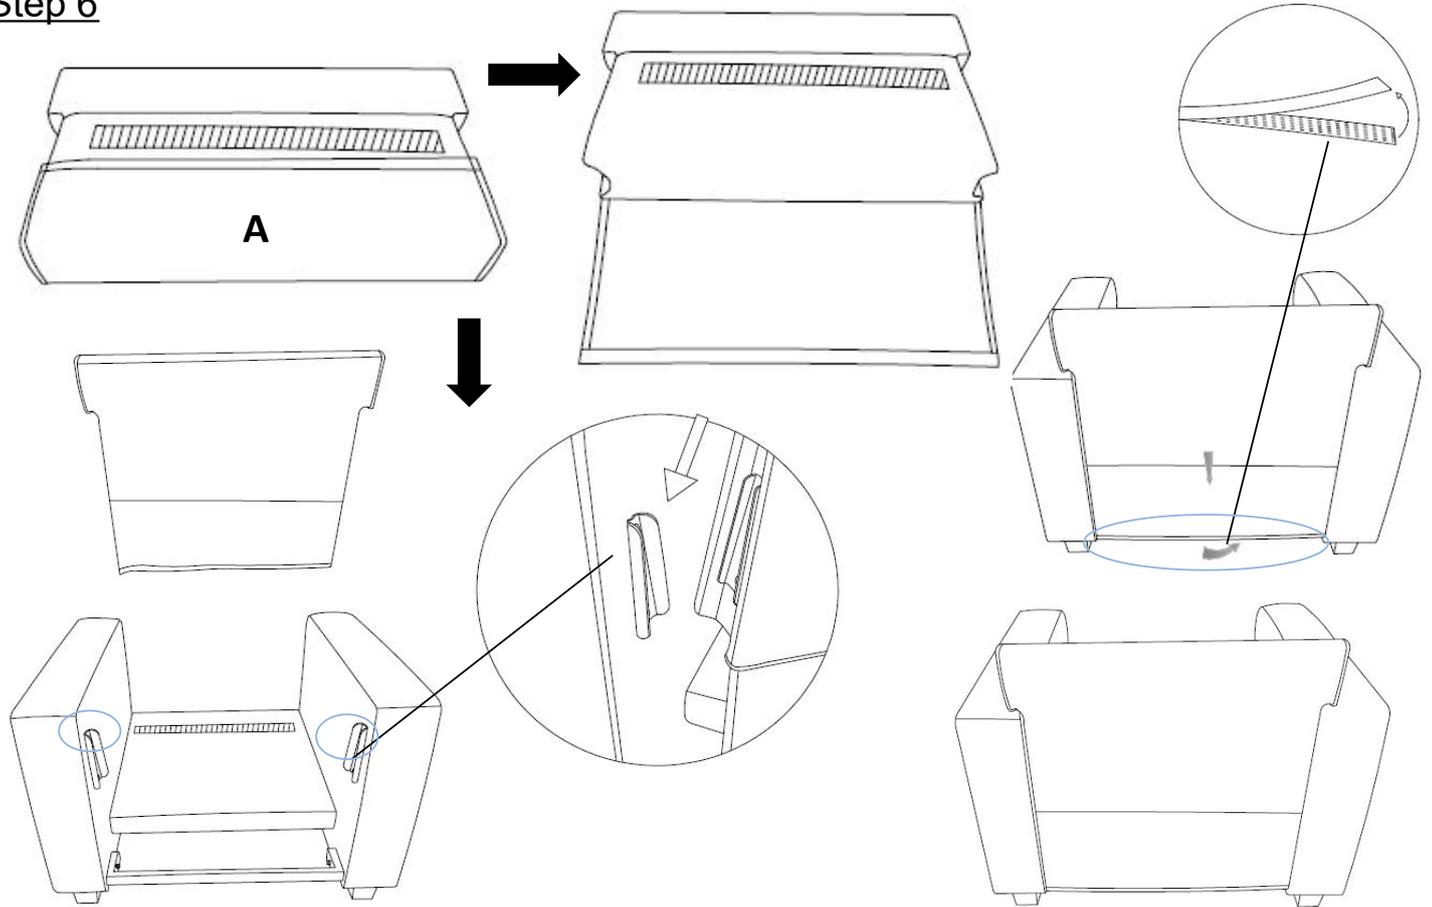


### Take out Backrest(A)

Turn it over and reveal the bottom cloth to expose the bottom frame.

Insert the inserts on the backrest(A) into the previously assembled inserts as shown, aligning the backrest with the seat bottom frame.

Smooth the fabric on the back downwards and cover the bottom cloth down and fasten the magic tap properly.


## Step 7

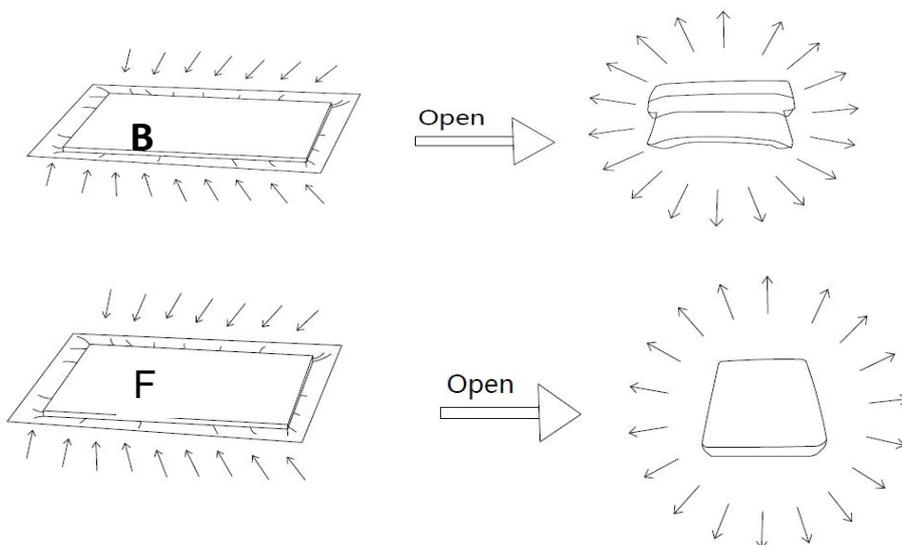

### Take out Back Cushion(B) and Seat Cushion(F).

Take out the compressed package and open the bag. Note that tapping the sides gently will help the cushion recover faster and maintain its shape evenly as shown.

## Step 7

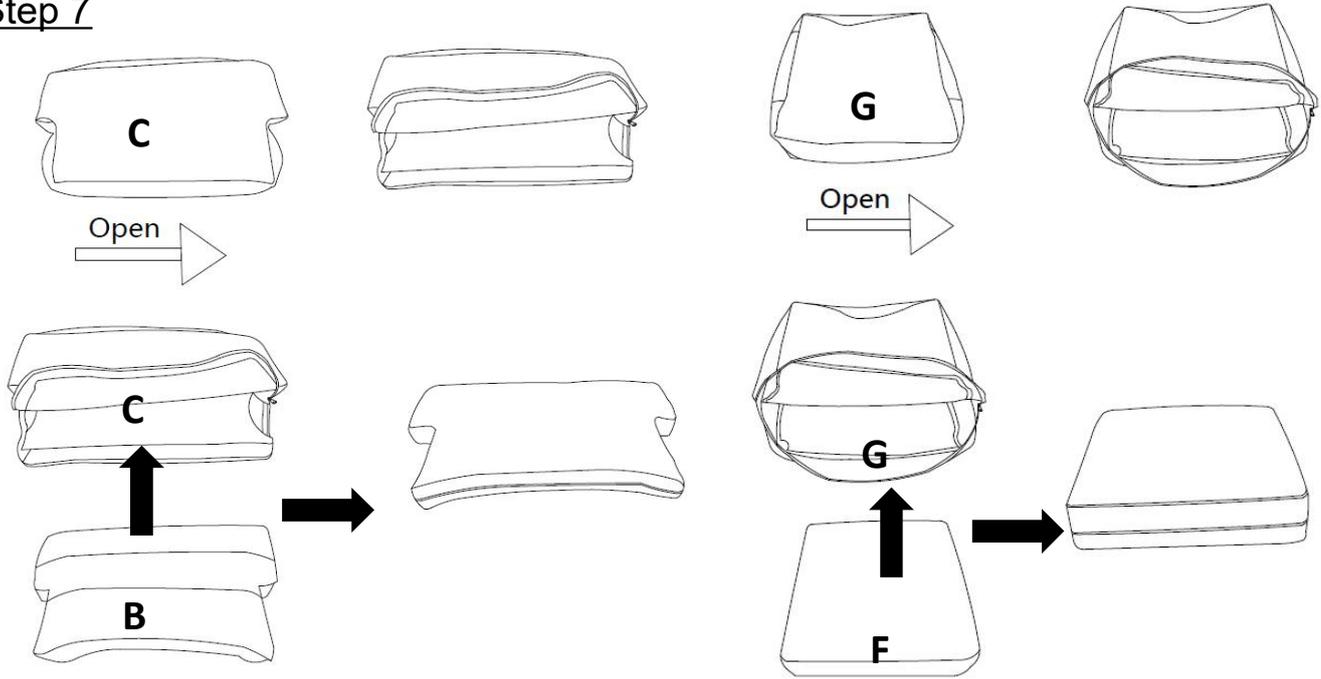


Take out Back Cushion Cover(C) and Seat Cushion Cover(G) after the compressed inner cushion has fully expanded.

Unzip the cover and insert the inner cushions. Ensure the shape and orientation of the inner cushions match those of the covers as shown.

Then zip up the cover.

**Tips:** Seat cushion insert: top/bottom differentiated (not visually distinguishable). Feel by hand before installation-top side with a layer of silk cotton for softer touch and more comfortable seating.

## Step 8


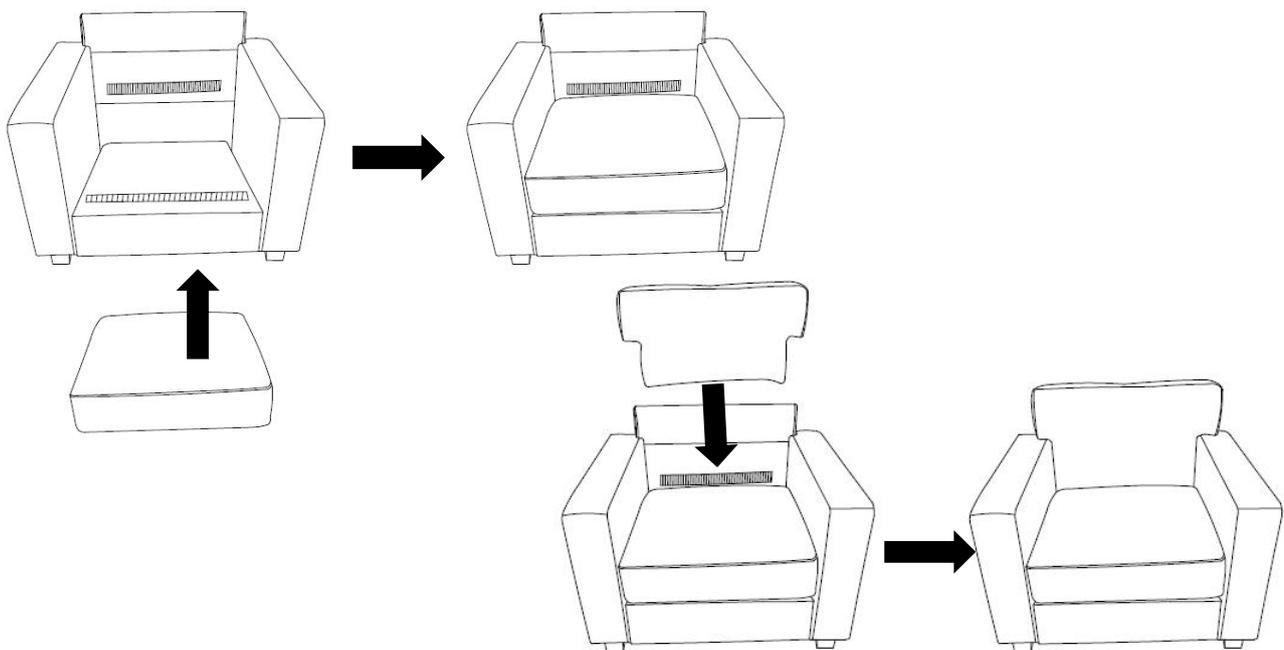


Upright the assembled frame.

Attach the magic tape on the bottom of the seat cushion to the seat frame to keep the seat cushion from moving.

Then attach the magic tape on the bottom of the back cushion to the backrest to keep the back cushion from moving.

## Step 9

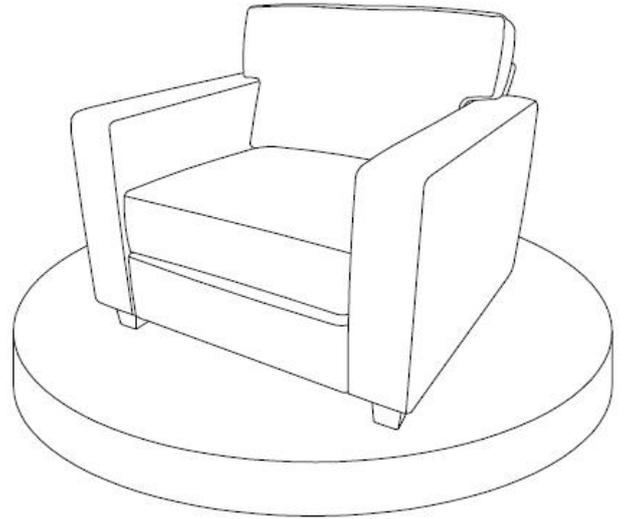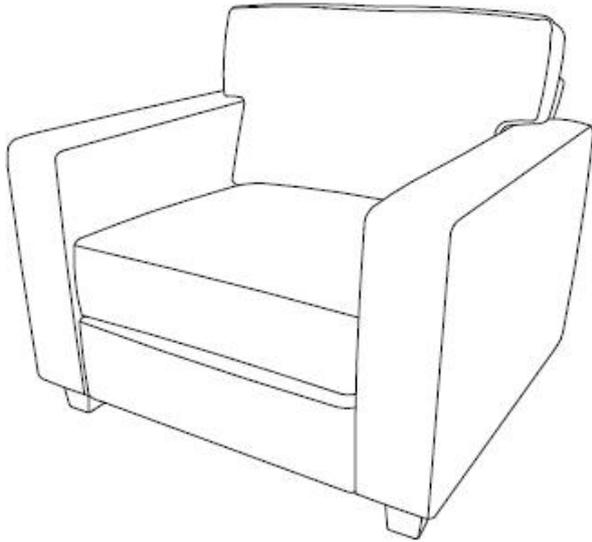

Place the Chair right side up and tested for stability.

**Fully Tighten all the bolts.**

Your Chair is ready for use.

This CHAIR can only be used on a flat, level surface.