


SAFAVIEH LIGHTING

Assembly Instruction

CAUTION Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:PND4002A

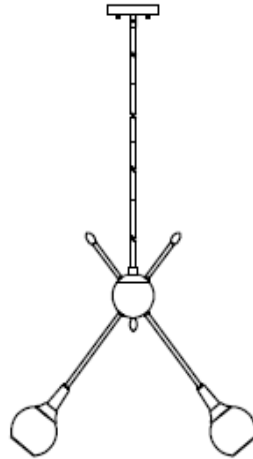

Care and Cleaning













To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes

Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Bulb		6X	G	Tube- 12"		2X
B	Sleeve		1X	H	Canopy Nut		2X
C	Socket Ring		6X	I	Canopy		1X
D	Shade		6X	J	Mounting Screw		2X
E	Lamp Body		1X	K	Mounting Plate		1X
F	Tube- 6"		2X	L	Wire Nut		3X

Installation


Step 1

Unpack all parts from cartons carefully.

Insert the power cord through one Short Tube(F), fix the tube in place by inserting it into the the Lamp Body(E) until tight.


Insert the power cord through the tube(F) or tube(G) as you want, make sure the thread portion of the tubes are downward.

Insert the Long tube(G) into the thread portion Canopy(I), then cut off the extra cord so that 6" wires at least long within the outlet junction box.

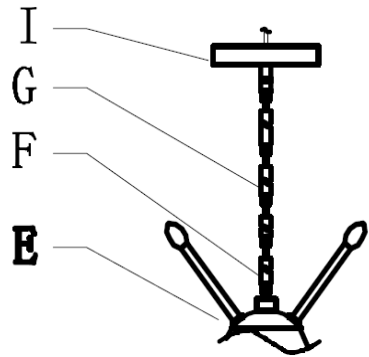


Step 2

Using Wire nut(L) to connect wires

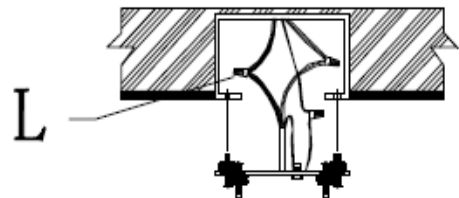

Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)


Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw (F) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.




Step 4

Fix the Mounting Plate(K) to the junction box with Mounting Screw (J).

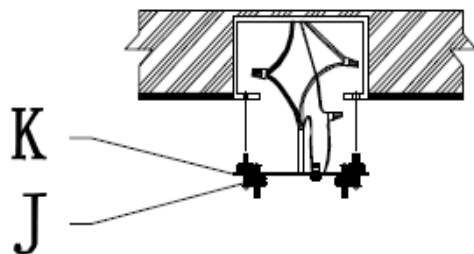

Step 5

Attach the Canopy(I) to the Mounting Plate (K) and fix it by turning the Canopy Nut (H) clockwise.

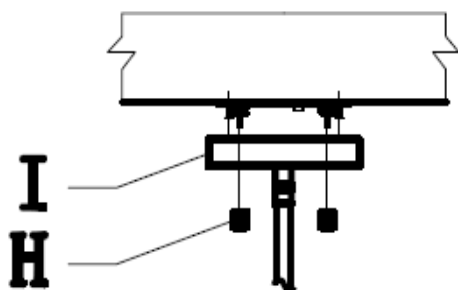


Step 6

Attach the Shade(D) onto the Lamp holder of Lamp Body(E),
and fix it by screwing the Ring(C) to tight by using the sleeve(B).

Install bulbs (A)

Be sure to use bulb with wattage
no greater than specified on this fixture

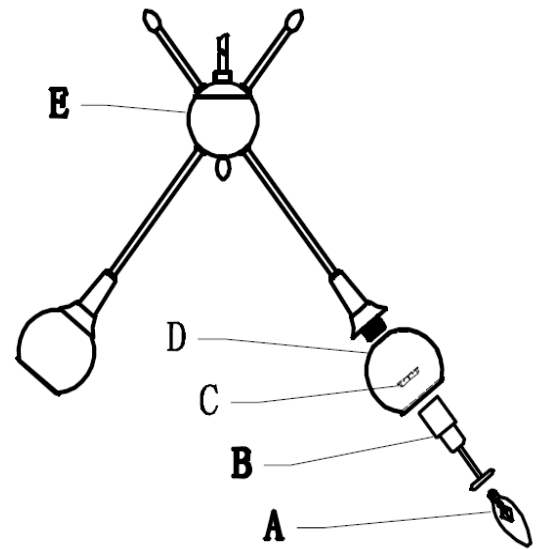

**PLEASE USE ON/OFF TYPE "B" BULB MAX 40-WATT
OR CFL BULB MAX 13-WATT OR LED BULB MAX
9-WATT THERE ARE 6PCS LED BULB 4-WATT LED
BULB IN THE BOX**

Step 7

Consult a qualified electrician to ensure correct branch
circuit conductor

ENJOY YOUR LAMP