

USER MANUAL FOR MODEL# L369-KL-654

Thank you for purchasing our product.

For questions or assistance on assembly, parts or installation, please contact customer support:

Email: service@jojospring.com

Website: www.jojospring.com

Please include the product number, order number if any, and your phone number in the email.

If there are broken or missing parts, please include the part numbers and quantities, and your address. We will ship you the replacement parts.


All emails will be answered within 24 hours.

For hard to explain problems, please send us a few pictures showing the problems if you can.

We involve the factory technicians directly in the support, so you can be assured you will deal with the experts.


CAUTION

1. Rated 110~130V/60Hz, bulb 60W-100W maximum.
2. Care should be taken to avoid damage to the surface of lighting and wire. Wearing gloves are recommended when installing.
3. Keep lighting away from acid, alkali and other corrosive chemical or gas, clean the lighting with clean soft cloth only.
4. Installation must be carried out by qualified electrician only.
5. Disconnect the power before installing, cleaning and replacing lighting.
6. Never cover the lighting when power is connected.

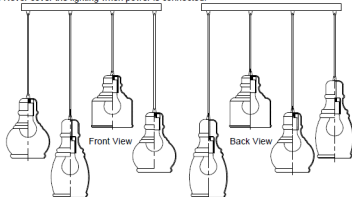

The wiring connection of luminaire and outlet box

Connect the positive electrode of the main wire that is marked, to the positive electrode of the outlet box supply wire. Connect the negative electrode of the main wire that is unmarked, to the negative electrode of the outlet box supply wire. Connect the fixture ground wire to the outlet box ground wire with wire connectors .



Requires E26 60W-100W bulbs(not included)



INSTRUCTION

2017-3-22

4A. Lock the crossbar on the junction box of the ceiling by using 2 pcs of 5/32 screws in the accessories bag.

4B. Connect the wires. The black wire is the hot /positive (+) wire. The white wire is the negative (-) wire.

4C. Cover the ceiling canopy and attach the screws to the canopy.


3. Connect one end of the separate black wire in the accessories bag to all 8 black wires from each light socket together, connect the other end of this separate black one with the positive(+) wire from your ceiling. Connect one end of the separate white wire to all 8 white wires from each light socket together, then connect the other end of the separate white wire with the negative(-) wire from your ceiling. Use the big wire nut in the accessories bag to cover the 9 connected wires.

2B. Fasten the lines of the shades by using part#2 and the screws on part#1.

2A. The lines on the glass shades have to pass through the ceiling plate (part#1).

1. Install 8 E26 bulbs (Not included).

Please note: The parts in this table are completely unassembled, for illustrative purpose. In the actual product that you receive, some parts are assembled and attached together.



Part Number	Picture	Quantity
1		1
2		8
3		2
4		3
5		3