

# ASSEMBLY INSTRUCTIONS

## Description: Arm Chair








### Important safety instructions:

- Please carefully read all instructions before assembling the chair.
- For your safety and ease, assembly by two or more adults is recommended.
- Keep instructions for future use.











### Pre-assembly:


- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- Remove all parts and hardware from box along with any plastic protective packaging.

### Parts List

Item	Description		QTY
A	Chair Back Top		1
B	Front Legs		2
C	Back Right Leg	 (C)	1
D	Back Left Leg	 (D)	1
E	Seat Cushion		1
F	Right Arm Post	 (F)	1
G	Left Arm Post	 (G)	1


### Hardware List

Item	Description		QTY
a	Bolts Ø5/16"x2-1/2"		4
b	Bolts Ø5/16"x2"		4
c	Bolts Ø5/16"x1-1/2"		4
d	Bolts Ø1/4"x3/4"		6
e	Lock Washers 5/16"		12
f	Flat Washers 5/16" (22mm)		12
g	Lock Washers 1/4"		6
h	Flat Washers 1/4" (19mm)		6
i	Allen Wrench 1/4"		1
j	Allen Wrench 5/16"		1

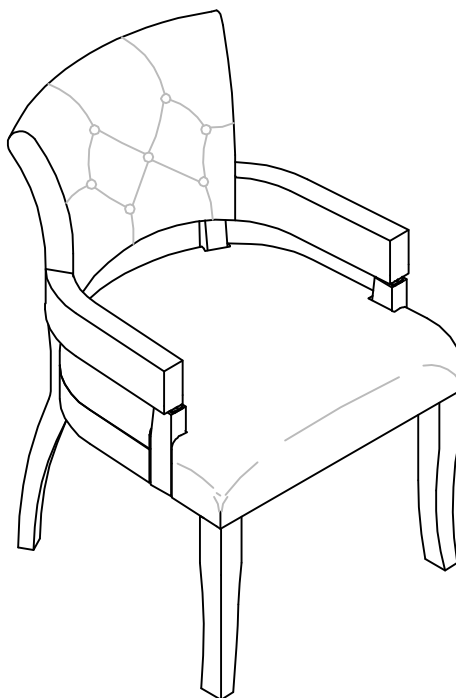


### Assembly Procedures:

Step 1. Assemble the arm chair on a flat, soft surface such as a carpet or cloth to prevent scratching the finish. Attach the back right leg (C) and the back left leg (D) to seat cushion (E) according to the labels (C, D) using bolts (b), lock washers (e), flat washers (f). Loosely tighten all bolts with Allen wrench (j).

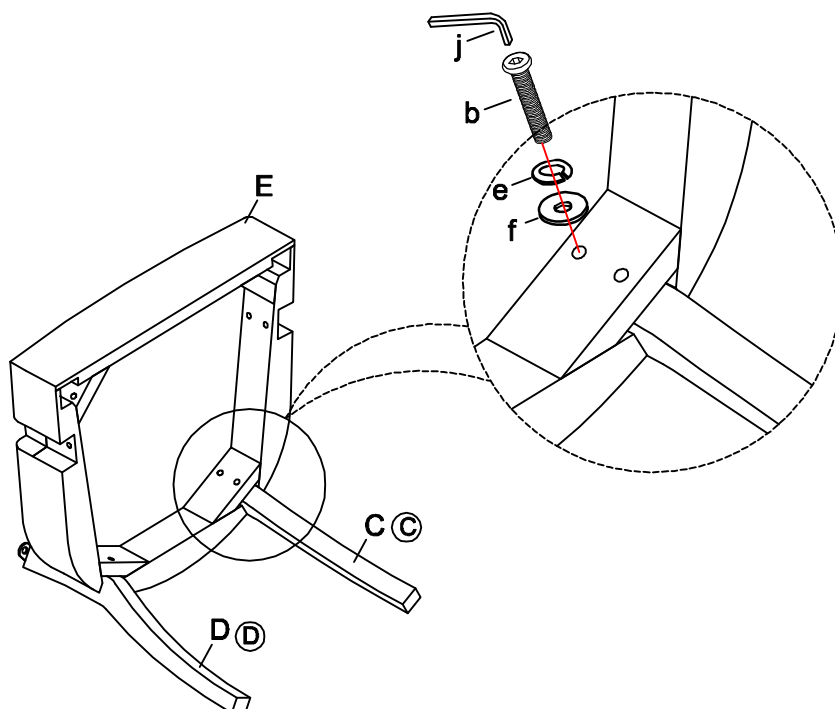


Step 2. Attach the front legs (B) to the seat cushion (E) using bolts (a), lock washers (e), flat washers (f). Loosely tighten the bolts with Allen wrench (j).

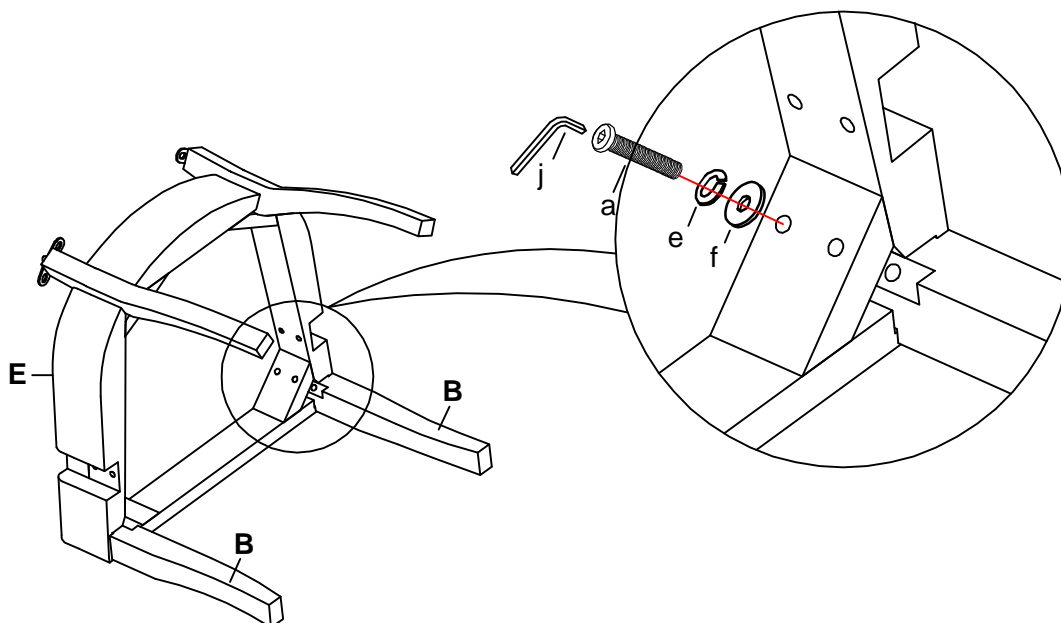


Thank you for your purchase

Step 3. Attach the right arm post (F) and left arm post (G) to seat cushion (E) according to the labels (F, G) using bolts (c), lock washers (e), flat washers (f). Loosely tighten the bolts with Allen wrench (j).

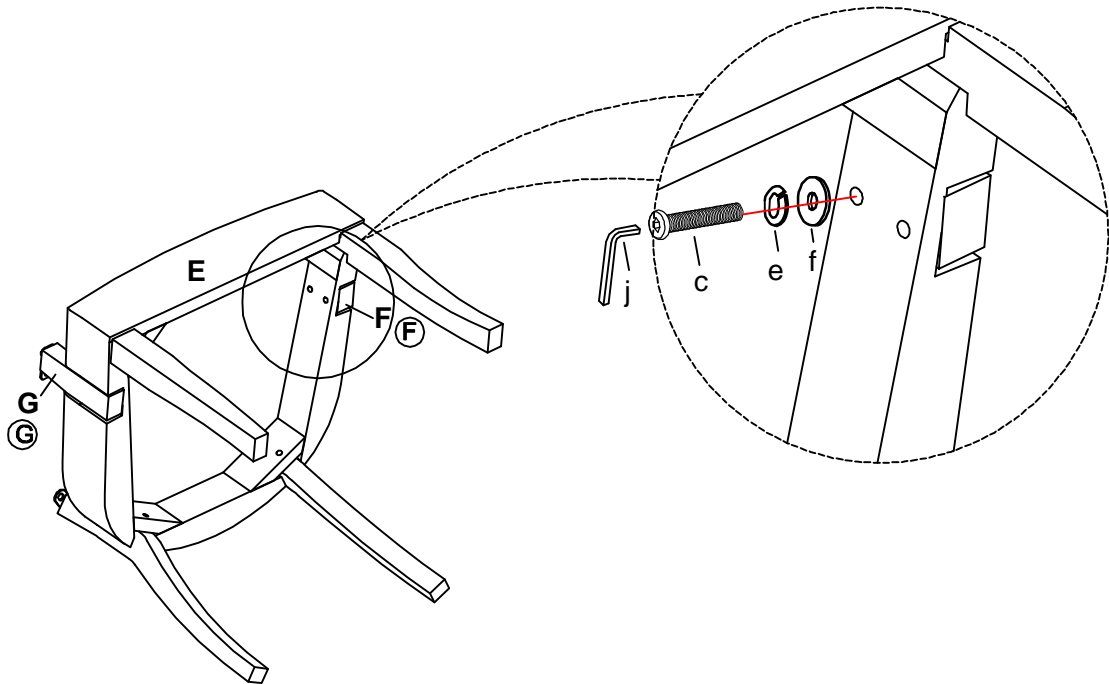

**Step 4.**

- 1) Attach the chair back top (A) to the top of assembled back legs and arm posts (F, G) using bolts (d), lock washers (g), flat washers (h). Loosely tighten the bolts with Allen wrench (i).
- 2) Securely tighten all bolts by Allen wrench (i, j).
- 3) Assembly is complete. Failure to follow these instructions may cause the bolts to misalign during assembly.

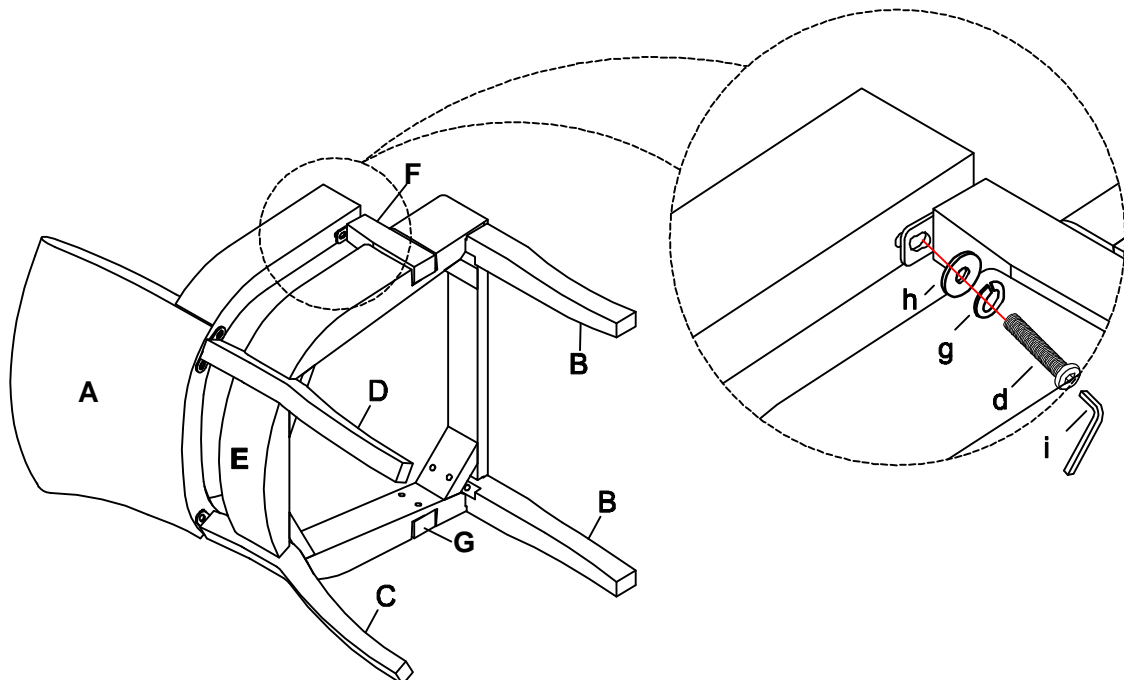

**Thank you for your purchase**