


No.	Porta List (1 Chair)	04.
110.	Parts List (1 Chair)	Qty.
P1.	Seat	1 pc.
P2.	Leg Frame	2 pcs.
P3.	Front Syretcher	1 pc.
P4.	Back Stretcher	1 pc.

	<i>3</i> -	
No.	Hardware List (1 Chair)	Qty.
H1.	M4 Allen Key	1 pc.
H2.	M7 x 40 JCBC-W Screw	6 pcs.
H3.	M6 x 50 JCBC Screw	2 pcs.
H4.	Barrel Nut	2 pcs.
H5.	Wood Button	2 pcs.


STEP 1

Assemble Front Strether (P3) & Back Stretcher (P4) to the Leg Frame (P2). Fix it by using Barrel Nut (H4) and JCBC Screw (H3) as shown. Then tighten it up with Allen Key (H1). *Do not fully tighten the screw until final step.




STEP 2

Assemble the Leg Frame to the Chair Seat (P1) with JCBC-W (H2). Then tighten it up with Allen Key (H1). <u>RED MARKING</u> on the Leg Frame should facing <u>BACK</u>

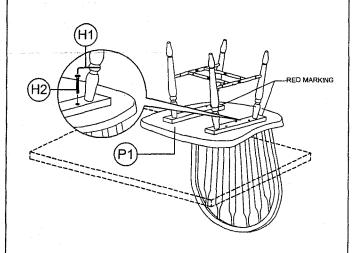


STEP 3


Pull the back legs inwards to ensure full connection between Leg Frame (P2) and Front Stretcher (P3).

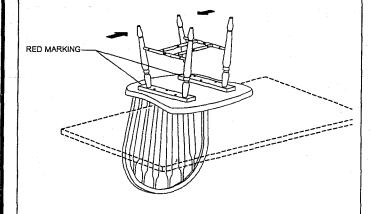

STEP 4

Make sure all legs are level. Once level, tighten up all the screws. Cover the screw holes with Wood Button (H5).






No.	Parts List (1 Chair)	Qty.
P1.	Seat	1 pc.
P2.	Leg Frame	2 pcs.
P3.	Front Syretcher	1 pc.
P4.	Back Stretcher	1 pc.

	*	
No.	Hardware List (1 Chair)	Qty.
H1.	M4 Alien Key	1 pc.
H2.	M7 x 40 JCBC-W Screw	6 pcs.
H3.	M6 x 50 JCBC Screw	2 pcs.
H4.	Barrel Nut	2 pcs.
H5.	Wood Button	2 pcs.
		L

STEP 1


Assemble Front Strether (P3) & Back Stretcher (P4) to the Leg Frame (P2). Fix it by using Barrel Nut (H4) and JCBC Screw (H3) as shown. Then tighten it up with Allen Key (H1).

*Do not fully tighten the screw until final step.




STEP 2

Assemble the Leg Frame to the Chair Seat (P1) with JCBC-W (H2). Then tighten it up with Allen Key (H1). RED MARKING on the Leg Frame should facing BACK

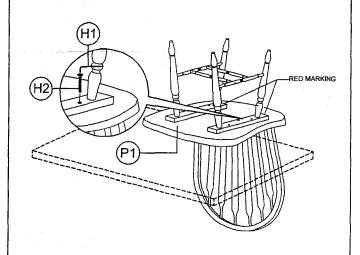


STEP 3


Pull the back legs inwards to ensure full connection between Leg Frame (P2) and Front Stretcher (P3).

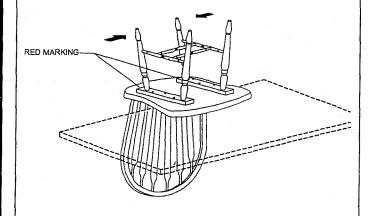

STEP 4

Make sure all legs are level. Once level, tighten up all the screws. Cover the screw holes with Wood Button (H5).






No.	Parts List (1 Chair)	Qty.
P1.	Seat	1 pc.
P2.	Leg Frame	2 pcs.
P3.	Front Syretcher	1 pc.
P4.	Back Stretcher	1 pc.

	th.	
No.	Hardware List (1 Chair)	Qty.
H1.	M4 Allen Key	1 pc.
H2.	M7 x 40 JCBC-W Screw	6 pcs.
H3.	M6 x 50 JCBC Screw	2 pcs.
H4.	Barrel Nut	2 pcs.
H5.	Wood Button	2 pcs.


STEP 1

Assemble Front Strether (P3) & Back Stretcher (P4) to the Leg Frame (P2). Fix it by using Barrel Nut (H4) and JCBC Screw (H3) as shown. Then tighten it up with Allen Key (H1). *Do not fully tighten the screw until final step.




STEP 2

Assemble the Leg Frame to the Chair Seat (P1) with JCBC-W (H2). Then tighten it up with Allen Key (H1). <u>RED MARKING</u> on the Leg Frame should facing <u>BACK</u>

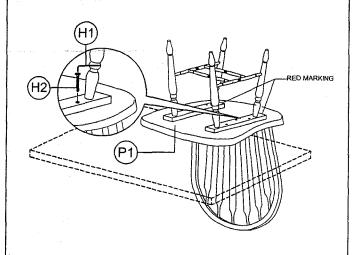

STEP 3

Pull the back legs inwards to ensure full connection between Leg Frame (P2) and Front Stretcher (P3).

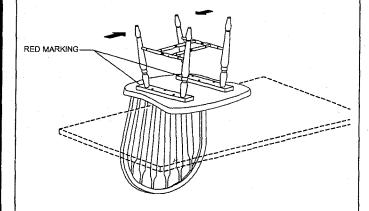

STEP 4

Make sure all legs are level. Once level, tighten up all the screws. Cover the screw holes with Wood Button (H5).

