Assembly Instructions

Caution: You must read this before you proceed


Barstool



Part List			
Label	Picture	Description	QTY
А		Left Armrest with Leg	1
В		Right Armrest with Leg	1
С		Backrest	1
D		Seat	1
E		Seat Cushion	1
F		Footrest	2
<u>Hardware</u>			
Label	Picture	Description	QTY
1	9	Bolt (M6*30mm)	7
2	9	Bolt (M6*15mm)	9
3	©	Washer	16
4		Allen Key	1
⑤		PE Cap	9

Assembly Preparation

Before Beginning Assembly:

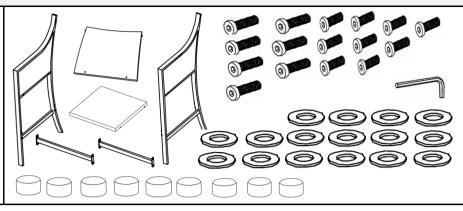



Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




Assemble on a clean non-marring surface (packing foam)-




Save all packaging until finished-

Assembly Steps

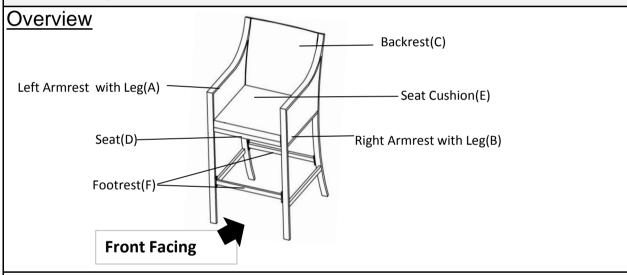


This Barstool has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Barstool parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

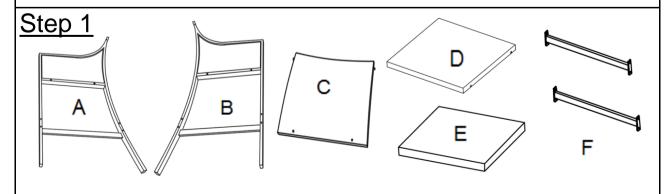


Open the carton and place all parts on a clean, non-marring surface.

Step 2

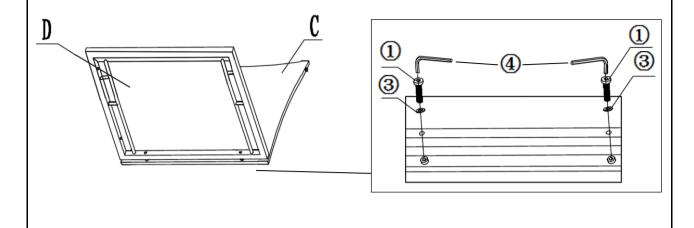


Place the Backrest(C) face up. Attach the Seat(D) to the Backrest(C) using Bolts(1) and Washers(3) with Alley Key(4). **Do not fully tighten the Bolts.**

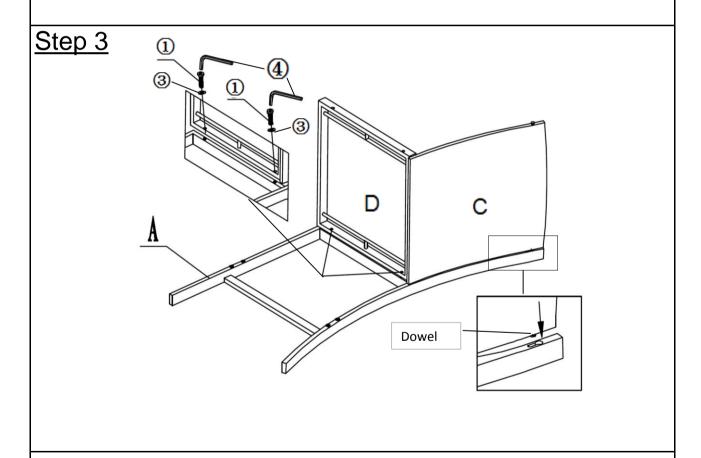

Place the Left Armrest with Leg(A) face down on the soft and clean surface. Insert the Dowel on the Backrest(C) into the mounting position of the Left Armrest with Leg(A). Attach the Backrest(C) and Seat(D) to the Left Armrest with Leg(A) using Bolts(1) and Washers(3) with Alley Key(4).


Do not fully tighten the Bolts.

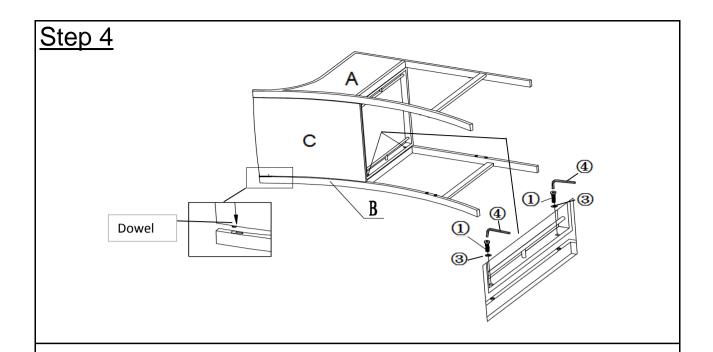

Place the Right Armrest with Leg(B) face down on the soft and clean surface. Insert the Dowel on the Backrest(C) into the mounting position of the Right Armrest with Leg(B). Attach the Backrest(C) and Seat(D) to the Right Armrest with Leg(B) using Bolts(1) and Washers(3) with Alley Key(4).

Do not fully tighten the Bolts.




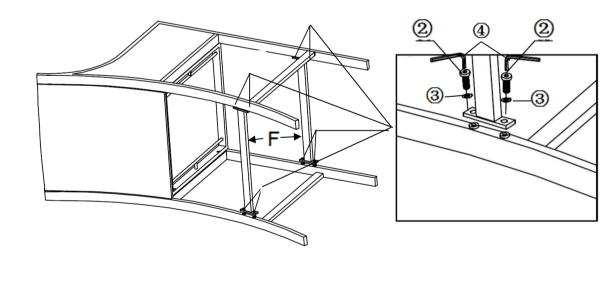

Place the Footrests(F) beween the Legs as shown.

Attach the bottom side of Footrest(F) to the Legs using Bolts(②) and Washers(③) with Alley Key(④). Then turn the Barstool over and attach another side of the Footrest(F) using Bolts(②) and Washers(③) with Alley Key(④).

Do not fully tighten bolts.

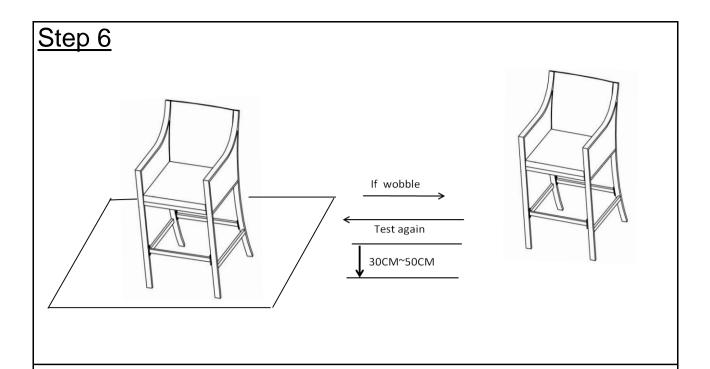

Place the Barstool on a LEVEL SURFACE to see if it wobbles.

If it wobbles, lift the Barstool some 30cm to 50cm high from the ground.

Keep your feet and toes well away from the drop zone.

Drop the Barstool freely and vertically with the four legs, hitting the ground, at the same time.

This Drop Test will help to ensure that all the Bolts and gaps all reach full alignment status.

Test again for evenness on a LEVEL SURFACE.

If no wobbles are found, proceed to tighten all the Bolts.


When tightening the Bolts, tighten sequentially.

DO NOT tighten any Bolt fully and then move on to the next one.

This may cause the frame to warp.


If there are still wobbles, loosen the Bolts and execute the same drop test.

If the Barstool is not stable it could lead to damage to the product.

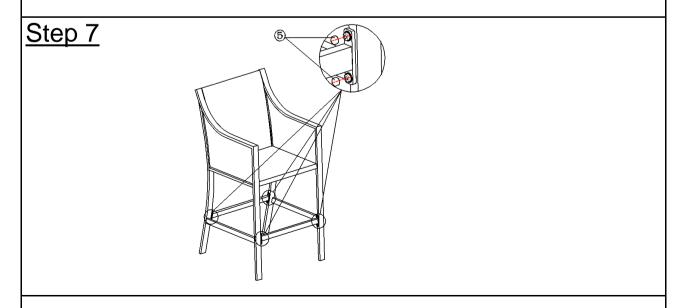

Put the PE Cap on the Bolts, as above picture show.

Step 8




Place the Seat Cushion(E) on the Barstool.

Your Barstool is ready for use.


This Barstool can only be used on a flat, level surface.


Care & Maintenance














- Not for commercial use. For residential use only .
- Stains may be removed with mild soap solution and damp cloth.
- Keep away from sources of ignition.
- ✓ ✓ Dust and pick-up spills using a clean, non-colored, lint-free cloth .