

## USER MANUAL FOR MODEL#L405-GBP-203

Thank you for purchasing our product.

For questions or assistance on assembly, parts,  
or installation, please contact customer support:

Email [service@tiffanydirect.com](mailto:service@tiffanydirect.com)

Fax 307-633-9603

Please include the product number, order number if any,  
and your phone number in the email.


If there are broken or missing parts, please include the part numbers and quantities,  
and your address. We will ship you the replacement parts.

All emails will be answered within 24 hours. For hard to explain problems, please  
send us a few pictures showing the problems if you can.

We involve the factory technicians directly in the support, so you can be assured you  
will deal with the experts


### ii . CAUTION

1. Rated 110~130V/60Hz, bulb 40W-60W maximum.
2. Care should be taken to avoid damage to the surface of lighting  
and wire, wearing gloves are recommended when installing
3. Keep lighting away from acid, alkali and other corrosive chemical or gas,  
clean the lighting with clean soft cloth only.
4. Installation must be carried out by qualified electrician only.
5. Disconnect the power before installing, cleaning and replacing lighting.
6. Never cover the lighting when power is connected.

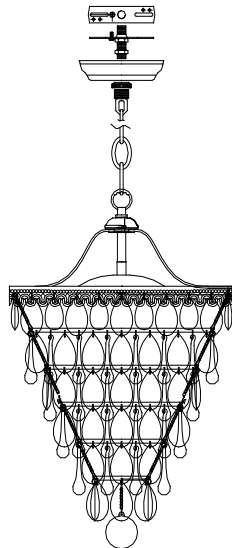


### The wiring connection luminaire and outlet box

Connect the positive electrode (marked with a '+' sign) of the luminaire to the positive electrode of the outlet box supply wire. Connect the negative electrode of the main wire that is marked with a '-' sign to the negative electrode of the outlet box supply wire. Connect the other negative electrode of the main wire that is unmarked, to the neutral wire of the outlet box supply wire. Connect the ground wire of the luminaire to the ground wire of the outlet box supply wire.

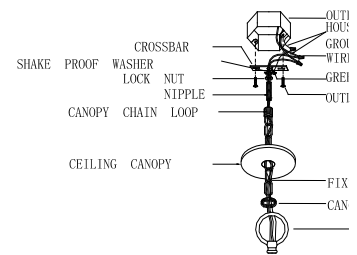

SUITABLE FOR THE USE




of  
box

of the main wire  
electrode of the  
ct the other negative  
is unmarked, to the  
t box supply wire.  
trode of the main  
egative electrode of the  
t the fixture ground wire  
with wire connectors .

LET BOX  
SE SUPPLY and  
UND WIRES  
E CONNECTORS  
EN GROUND SCREW  
LET BOX SCREWS


FIXTURE CHAIN  
ADJUSTABLE LOCK RING  
—FIXTURE LOOP

OR BULB E12 40-60W



## INSTRUCTION


### INSTRUCTION

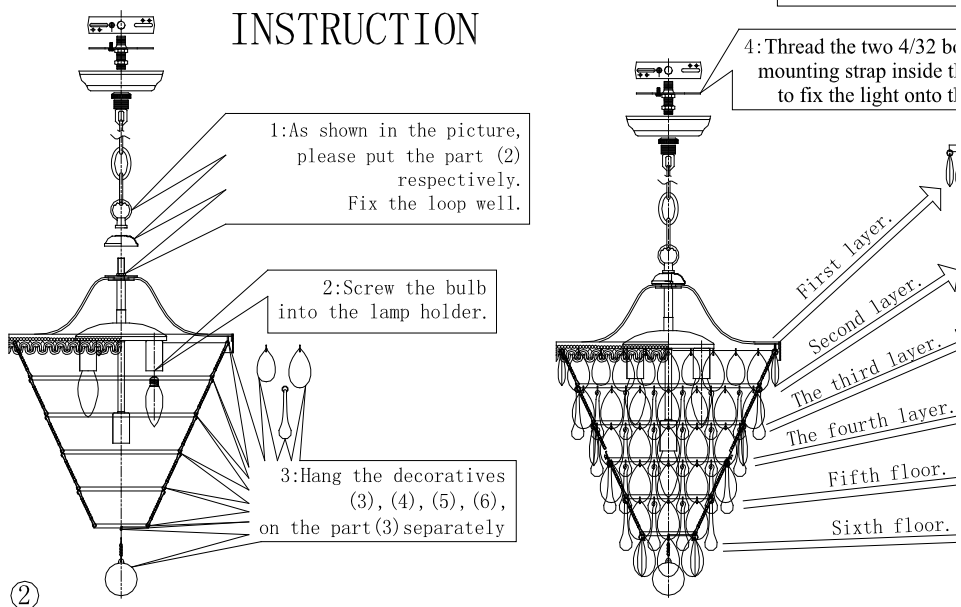


ION









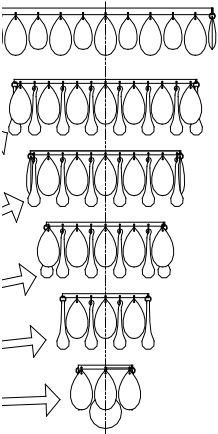
leted.

olts on the  
he canopy  
he ceiling.

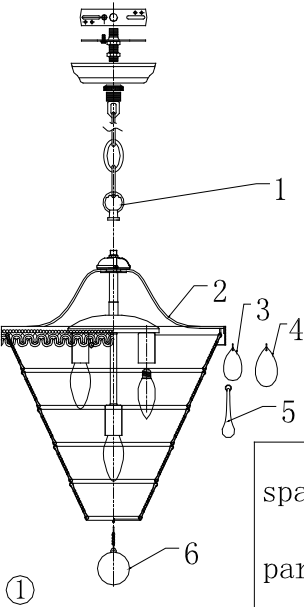

Please note: The parts in this table are completely unassembled, for illustrative purpose. In the actual product that you receive, some parts are assembled and attached together.



No	Graphics	Quantity
1		1
2		1
3		16
4		81
5		59
6		1
spare parts		4
		4
		5