#### **CARE AND MAINTENANCE**

Unplug lamps before using any cleaning solutions. Dust shades with a feather duster or with an appropriate


vacuum-brush attachment. Wipe with a soft, dry cloth and clean lamp bases with the methods appropriate to the material. Avoid the use of chemicals and

household cleaners as they may damage the finish.



Model# **FLL4006A Product Dimensions:** 

13.5"LX13.5"WX63.5"H

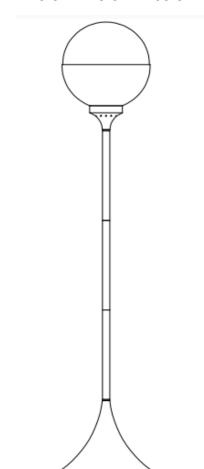

### NOTICE&IMPORTANT SAFETY INSTRUCTIONS

- \*Please make sure that you have all parts indicated before you begin assembly of this item
- \*This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- \*To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation.
- \*The external flexible cable or cord of this luminaire can not be replaced; If the cord is damaged, the luminaire shall be destroyed.
- \*\*This portable lamp has a polarized plug(one blade is wider than the other)as a safety feature to reduce the risk of electric shock.this plug will fit in a polarized outlet only one way.if the plug does not fit fully in the outlet, reverse the plug, if it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted.do not attempt to defeat this safeat this safety feature.

## **Part List and Hardware List**


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A.B.C	Lamp body tube		1X	F	metal shade		1X
D	Lamp base		1X	G	acrylic shade		1X
E	Bulb		1X	Н	cord and switch	~~	1X

#### **PREPARATION**

Before beginning assembly of product,make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 12 minutes.

# PLEASE USE ON/OFF TYPE"A"BULB MAX 40-WATT OR CFL BULB MAX 9-WATT THERE ARE 1PC CFL 9-WATT BULB IN THE BOX.



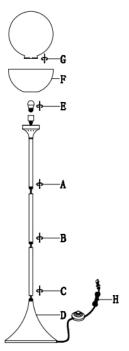



Insert the tube(C)into (B) and (A) in order.

Gently pull the cord (H)so that the body(A,B,C)

comes into contact with the base(D)

screw the body to the base

Insert the bulb(E)in to the socket.

Put the metal shade(F) on the top of the socket.


Then screw the acrylic shade(G)in to the metal shade(F).

#### Remark:

If want to change the bulb you need hold the acrylic shade (G) losse from the metal shade(E)

## **ENJOY YOUR LAMP**





Step2

Put the light on a level surface to check if every thing is stable.