

# ASSEMBLY INSTRUCTIONS

---

## TOOLS REQUIRED




Allen Wrench

(Included)



Phillips  
Screwdriver

(Not Included)

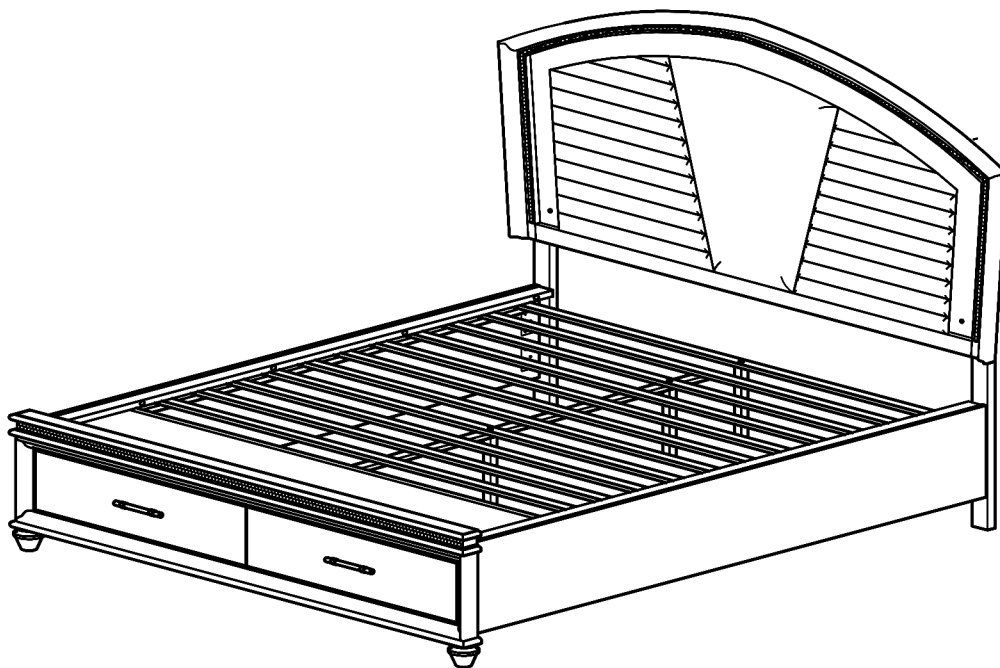

2 — Persons  
Recommended

## ASSEMBLY RATING



EASY —————> DIFFICULT

The Assembly Rating is a 5-point system showing the level of effort needed to assemble a specific product.



## **CHECK BEFORE STARTING**

☐

### **Are you missing anything?**

Double-check all parts, hardware and accessories listed on Page 6 are accounted for.

☐

### **Check out our Quick Tips!**

We recommend reviewing the pre-assembly handouts. Even experts need a refresher now and then!

☐

### **Should we send any replacements?**

Are there any irregularities or flaws in the parts? We can send replacements!


☐

### **Prep Time!**

Please review the assembly instructions and all diagrams prior to assembling. Arrange parts as recommended on Page 7 and group identical hardware together to make assembling easier.


# PRE ASSEMBLY INTRODUCTION

We understand building ready-to-assemble furniture can be a challenging experience for some. To help avoid confusion, we have provided some helpful tips that may speed up the process.



## Teamwork

ALWAYS have at least two people to help with transporting and assembling the product to avoid potential injury and/or damage.

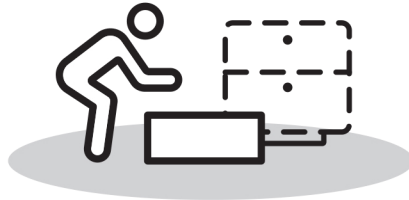

## Suitable Location

Assembling near the area of the intended location is highly recommended.




## Sufficient Space

Make sure you have enough space to move around during the assembly.



## Avoid Scratches

Use cardboard, blankets or a carpeted area while assembling furniture to prevent scratches.



## Flat Surface

Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.


# ASSEMBLY AND CARE ADVICE



**FAILURE TO FOLLOW THE GUIDELINES BELOW MAY  
RESULT IN INJURY AND/OR PROPERTY DAMAGE.**



Position each part correctly  
and insert screws or bolts into  
their respective holes.

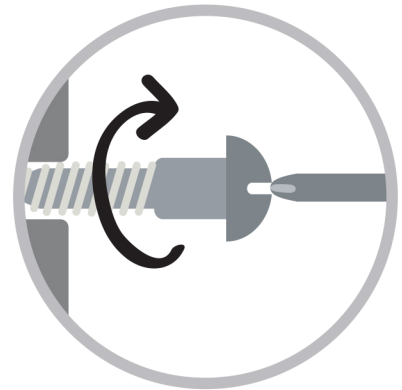


Turn clockwise to tighten and  
only tighten when step is  
completed or when instructed  
to do so.



Use the appropriate hand tools  
or power tools for assembly.  
Select steps, such as tightening  
screws and/or bolts, may require  
hand tools to avoid causing  
damage during assembly.



Save the instructions and store  
any supplied tools for later  
maintenance.

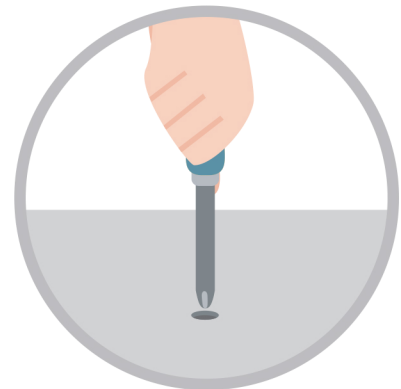


After two weeks, check and  
tighten any loose hardware and  
repeat again every six months  
thereafter.

**IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.**

# CAL KING BED




- Please keep instructions for future reference.
- Check the quantity and irregularity of parts and hardware before you start.

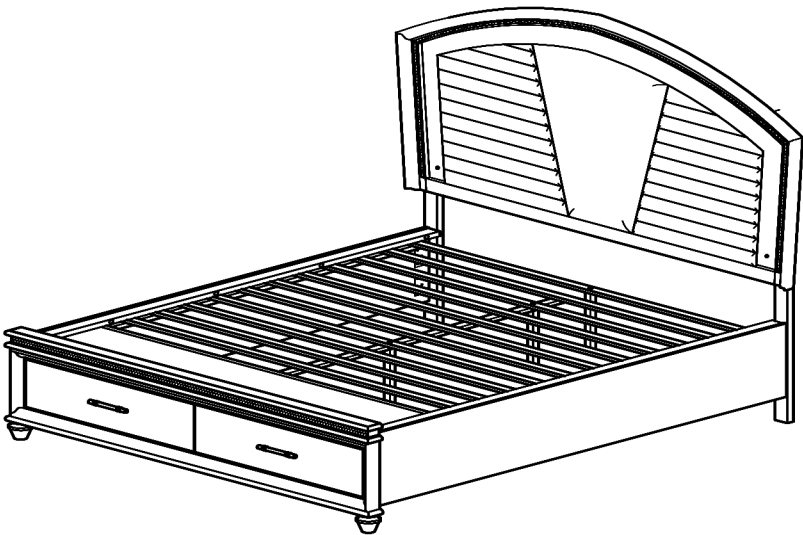

## PARTS

### PART LIST OF HEADBOARD

#1 1pc




Headboard

#2 1pcs



Headboard Leg - (R)

#3 1pcs



Headboard Leg - (L)

### PART LIST OF FOOTBOARD

#4 1pc



Footboard

#5 2pcs



Acrylic Leg

#6 1pc



Drawer Support Rail

#7 2pcs




Drawer

#8 2pcs



Drawer Base Panel

#9 13pcs



Roll Slat

#10 3pcs




Slat Support Leg

#11 1pc








Drawer Support Leg

#12 1pc








Slat Cover Panel

## PART LIST OF SIDE RAIL











#13 2pcs	#14 1pc	#15 2pcs	#16 1pc	#17 1pc
				
Side Rail	Center Vertical Slat	Top Cap	Slat	Slat Support ( long)

## HARDWARE








### HARDWARE PACK IN HEADBOARD

#A 1pc	#B 6pcs	#C 6pcs	#D 6pcs	#E 1pc
				
Allen Key	JCBC - M6 x 40mm	M6 Spring Washer	M6 Flat Washer	AC Adapter

### HARDWARE PACK IN FOOTBOARD

#F 1pc	#G 2pcs	#H 9pcs	#I 3pcs	#J 14pcs
				
Allen Key	JCBC - M6 x 16mm	JCBC - M6 x 35mm	JCBC - M6 x 60mm	M6 Spring Washer
#K 7pcs	#L 4pcs	#M 26pcs	#N 2pcs	#O 4pcs
				
M6 Flat Washer	1/4" Flat Washer	Screw 32mm	Screw 16mm	Adjustable Leveller

### HARDWARE PACK IN SIDE RAIL

#P 1pc	#Q 1pc	#R 10pcs	#S 11pcs	#T 10pcs
				
Allen Key	JCBC - M6 x 35mm	JCBC - M6 x 45mm	M6 Spring Washer	M6 Spring Washer
#U 2pcs	#V 1pc			
				
Screw 32mm	Adjustable Leveller			

# ASSEMBLY INSTRUCTIONS

1

Part (#1) x 1pc

Part (#2) x 1pc

Part (#3) x 1pc


Hardware (#A) x 1pc

Hardware (#B) x 6pcs

Hardware (#C) x 6pcs

Hardware (#D) x 6pcs

Align HB legs (#2,3) to the headboard (#1), then secure by using bolts (#B) with washers (#C,D).

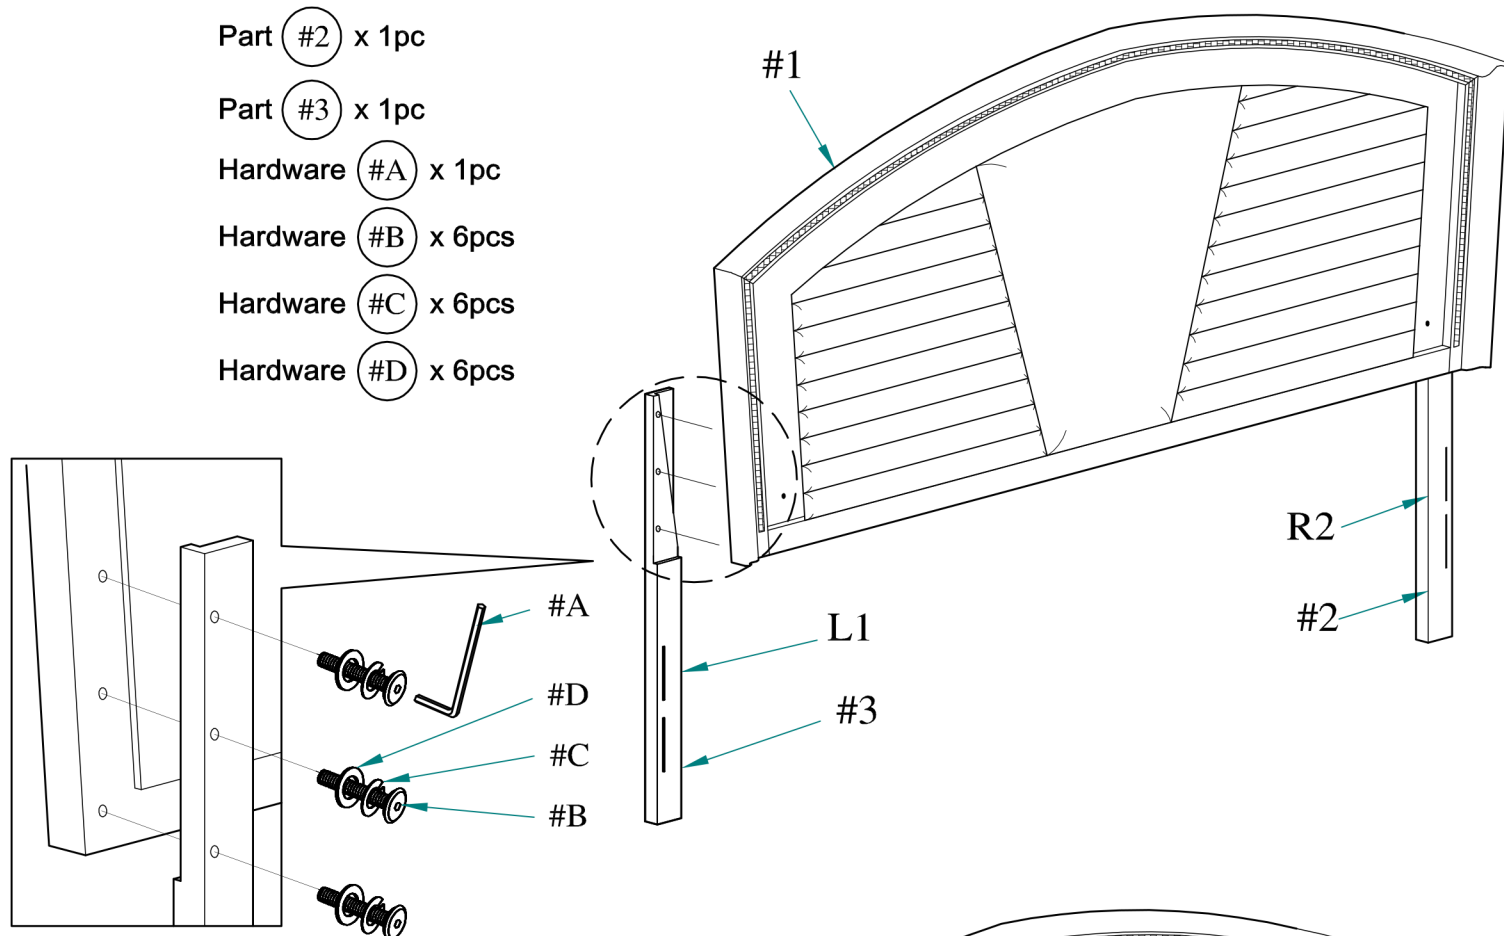


2

Part (#1) x 1pc

Hardware (#E) x 1pc

Ensure adapter socket connect to behind the headboard socket

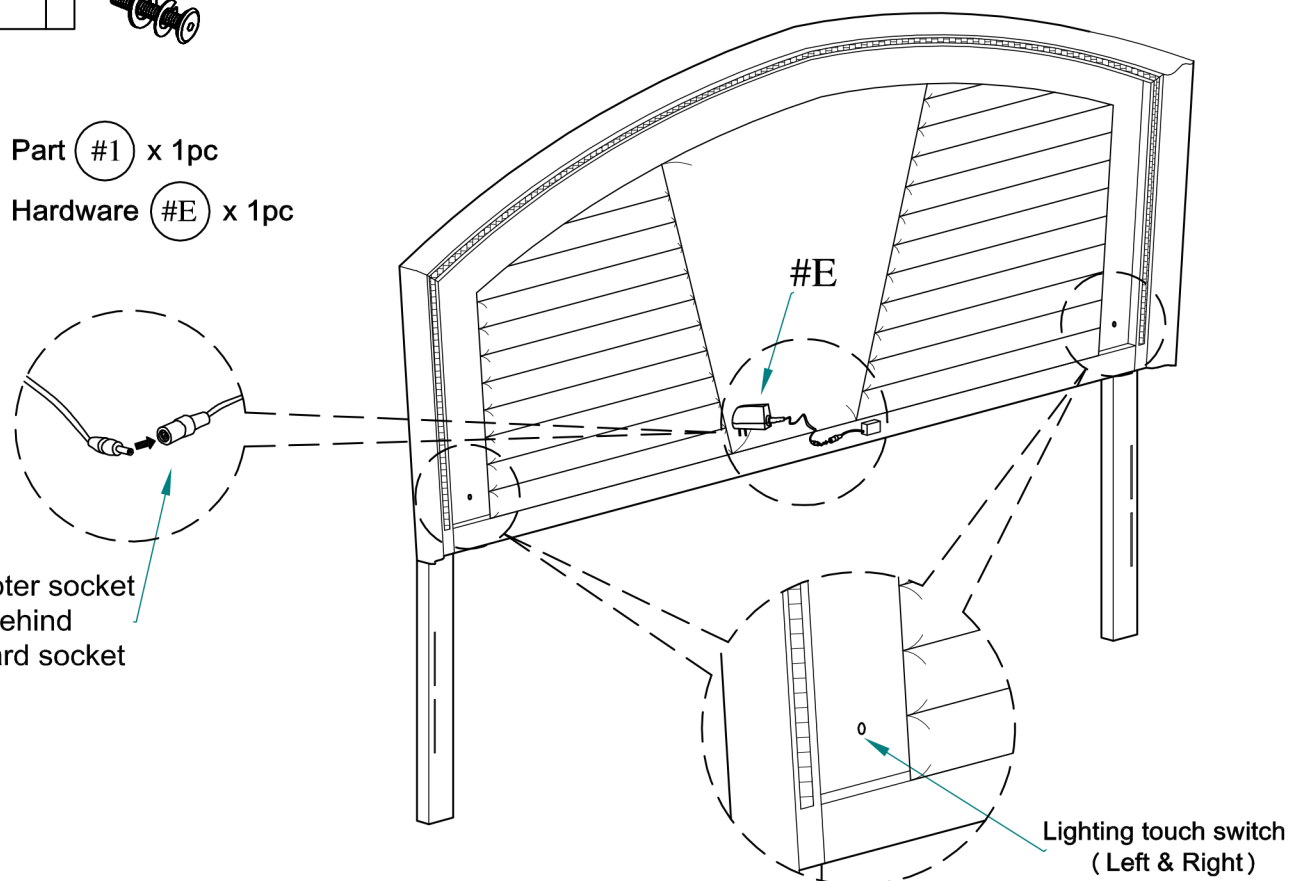

# ASSEMBLY INSTRUCTIONS

## 3

Part (#4) x 1pc

Part (#5) x 2pcs

Attach FB legs (#5) to footboard (#4).

Bun Foot cover

Remove Acrylic Leg cover  
before assemble.

#5

#5

#4

## 4

Part (#1) x 1pc

Part (#4) x 1pc

Part (#13) x 2pcs

#1

#13

#4

#13

Align and hook the side rails (#13) to the  
headboard (#1) and footboard (#4).

# ASSEMBLY INSTRUCTIONS

## 5


Part (#6) x 1pc

Hardware (#F) x 1pc

Hardware (#G) x 2pcs

Hardware (#J) x 2pcs

Hardware (#K) x 2pcs

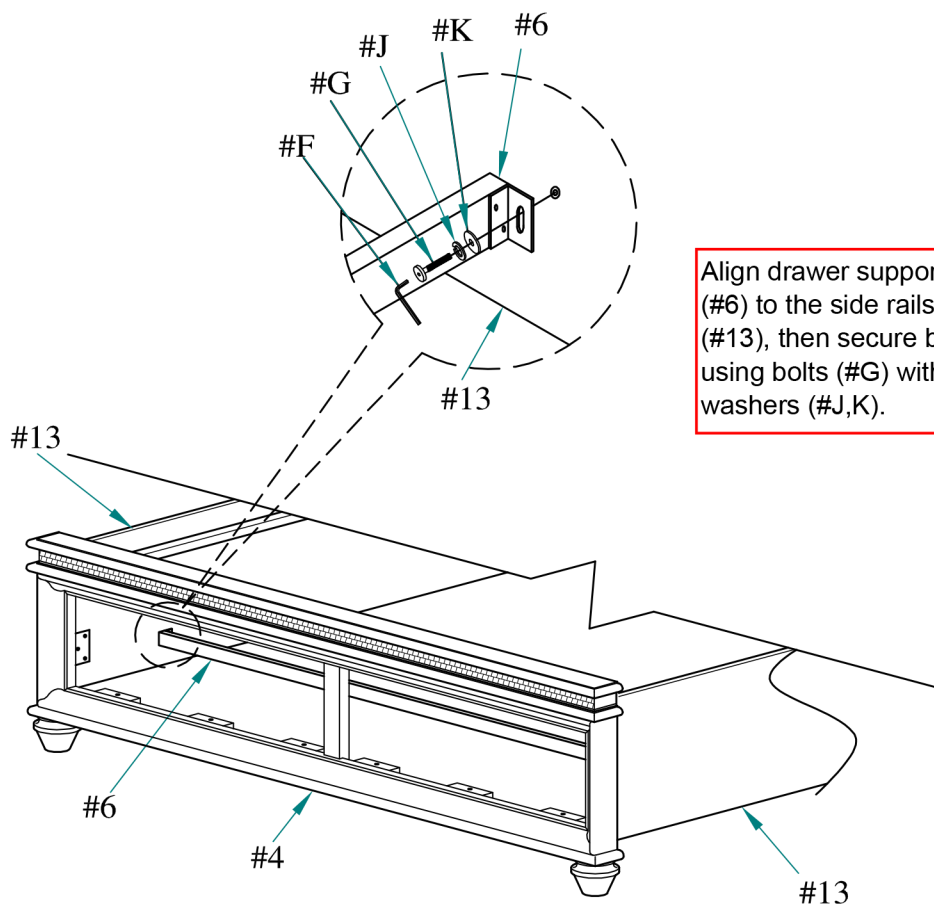


Align drawer support rail (#6) to the side rails (#13), then secure by using bolts (#G) with washers (#J,K).

## 6

Make sure to fully extend rails to see the black switch on the rails.

Step to remove the drawer :

1. Pull the drawer
2. Using both hands,
  - Left hands side - pull up switch
  - Right hands side - pull down switch
3. Then remove the drawer from the drawer base panel

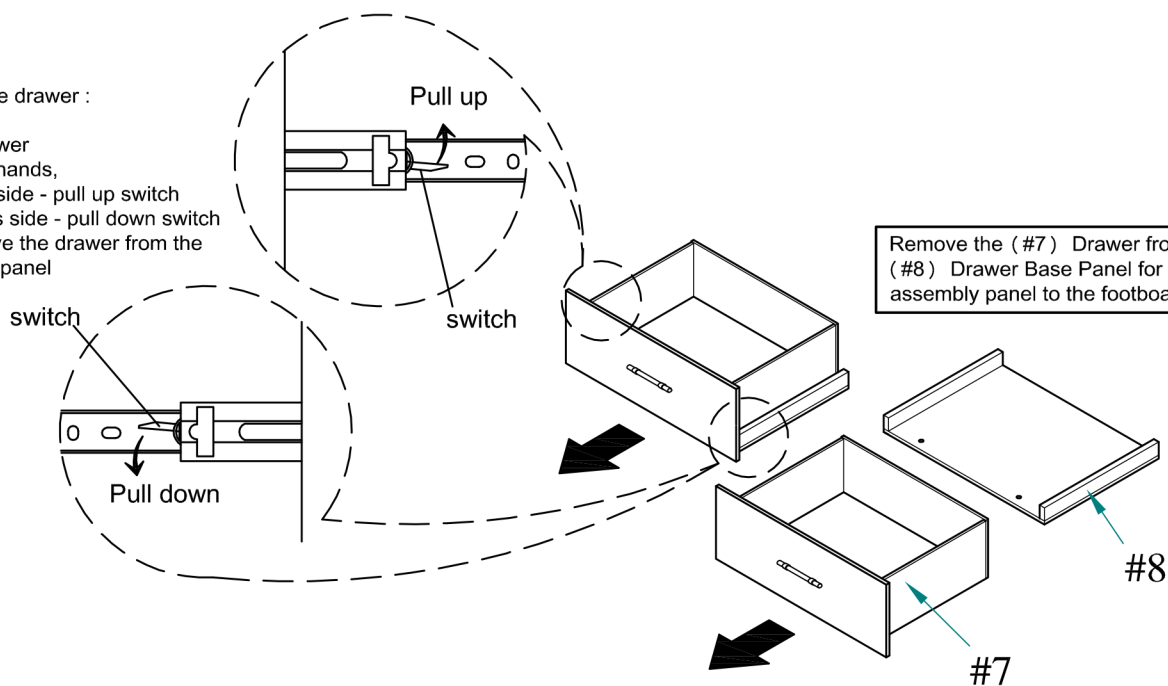

Remove the (#7) Drawer from (#8) Drawer Base Panel for assembly panel to the footboard.

# ASSEMBLY INSTRUCTIONS

7

Part (#8) x 2pcs

Hardware (#F) x 1pc

Hardware (#H) x 8pcs


Hardware (#J) x 8pcs

Hardware (#K) x 4pcs

Hardware (#L) x 4pcs

1) Align drawer base panels (#8) to the footboard (#4), then secure by using bolts (#H) with washers (#J,L).

2) Secure back holes of drawer base panels (#8) to footboard (#4) by using bolts (#H) with washers (#J,K).

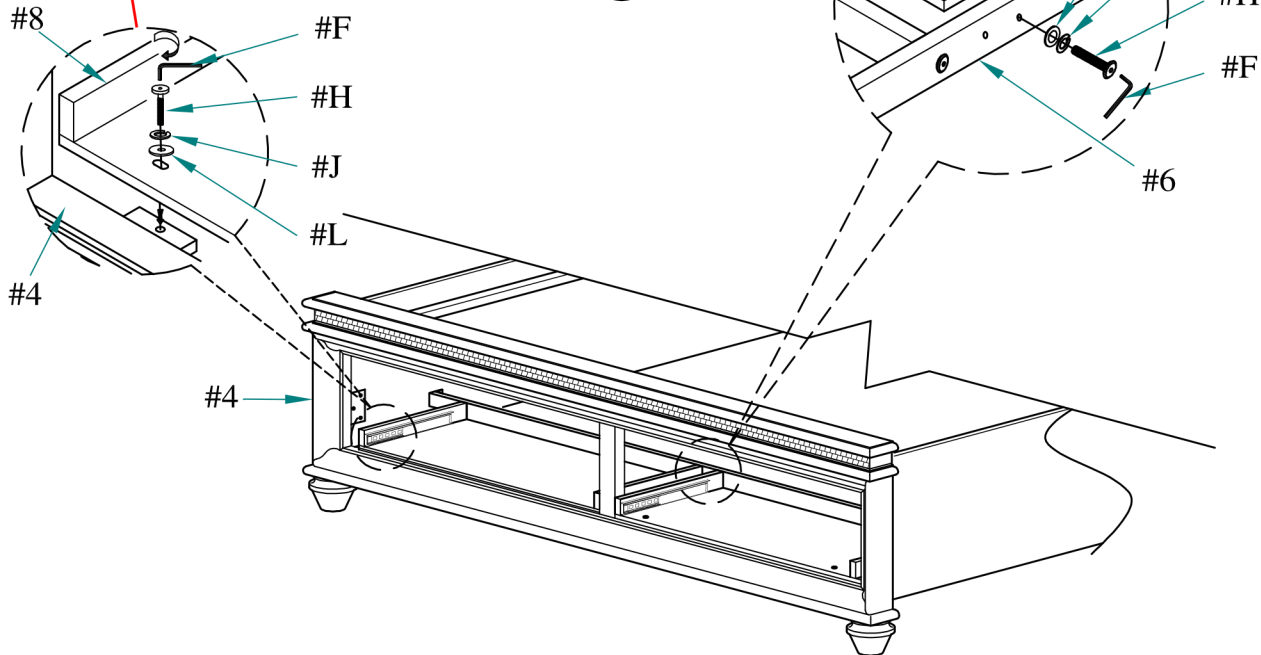

8

Part (#11) x 1pc


Hardware (#F) x 1pc

Hardware (#H) x 1pc

Hardware (#J) x 1pc

Hardware (#K) x 1pc

Hardware (#O) x 1pc

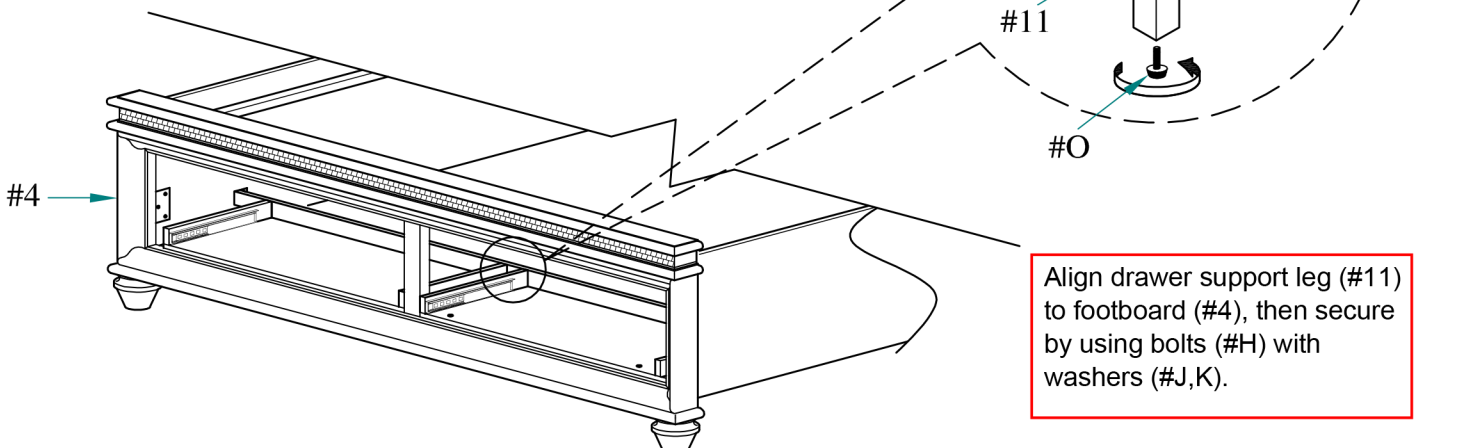

Align drawer support leg (#11) to footboard (#4), then secure by using bolts (#H) with washers (#J,K).

# ASSEMBLY INSTRUCTIONS


## 9

Step to install the drawer on the drawer base panel :

\*\*\*Prefer 2 person to install the drawer

1. Adjust the ball bearing plate to the front as a diagram shows.
2. Then attach the drawer to the drawer base panel and install with carefully.

Insert the drawer (#G) to the footboard (#D)

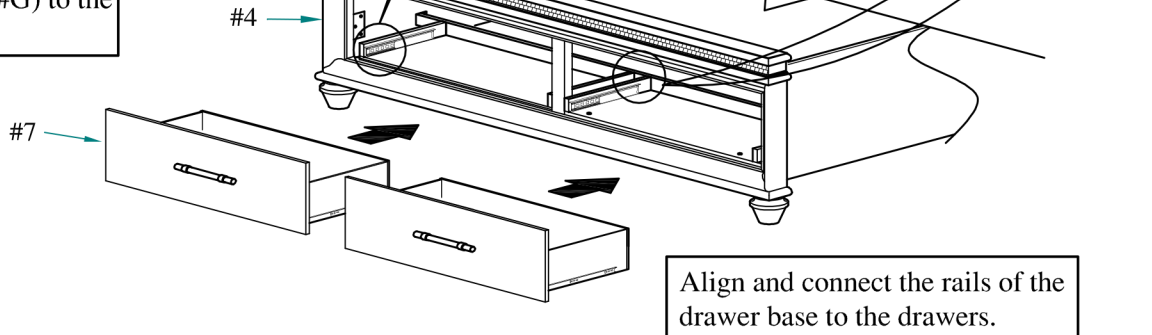

## 10

Part (#9) x 13pcs Hardware (#F) x 1pc



Part (#10) x 3pcs Hardware (#I) x 3pcs

Part (#14) x 1pc Hardware (#J) x 3pcs


Hardware (#M) x 26pcs

Hardware (#O) x 3pcs

1) Align slats (#9) to side rails (13), then secure by using screws (#M).

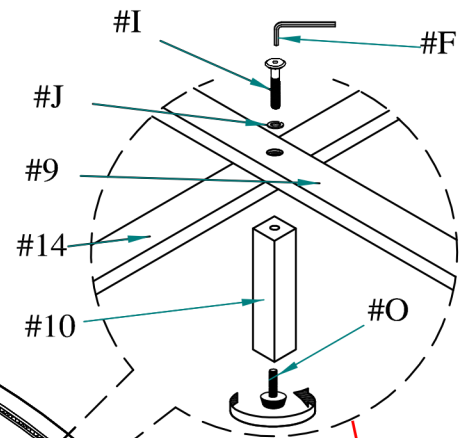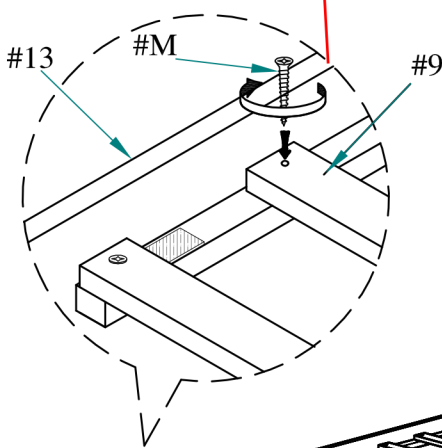

2) Align center slat (#14) to slats (#9), then secure by using bolts (#I) with washers (#J) onto support legs (#10). Attach levelers (#O) to support legs (#10).

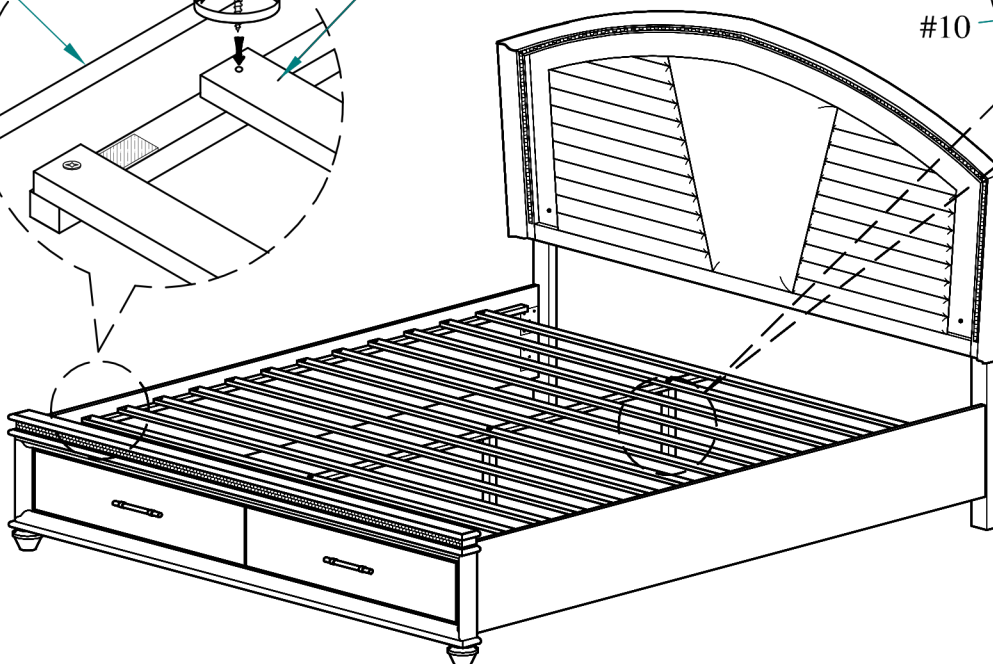

# ASSEMBLY INSTRUCTIONS

## 11

Part (#16) x 1pc

Hardware (#P) x 1pc

Part (#17) x 1pc



Hardware (#Q) x 1pc

Hardware (#S) x 1pc


Hardware (#U) x 2pcs

Hardware (#V) x 1pc

1) Align end slat (#16) to side rails, then secure by using screws (#U).

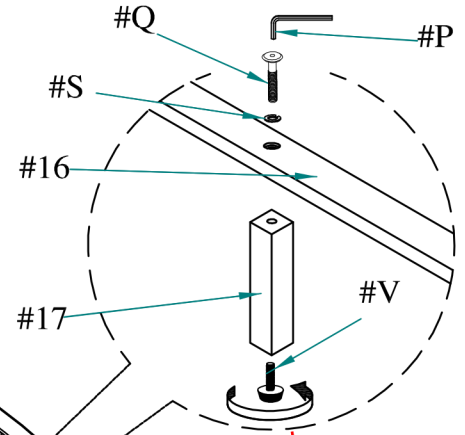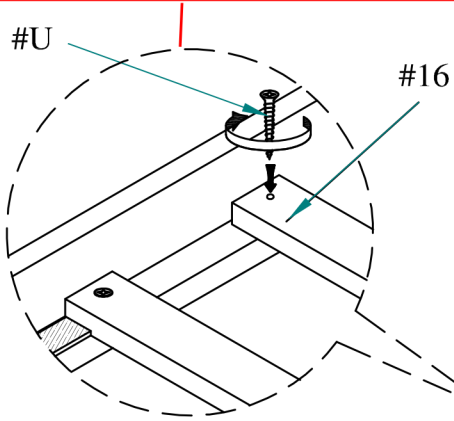


2) Align support leg (#17) to end slat (#16), then secure by using bolts (#Q) with washers (#S) onto support leg (#17). Attach and adjust levelers (#V) to support legs (#17).

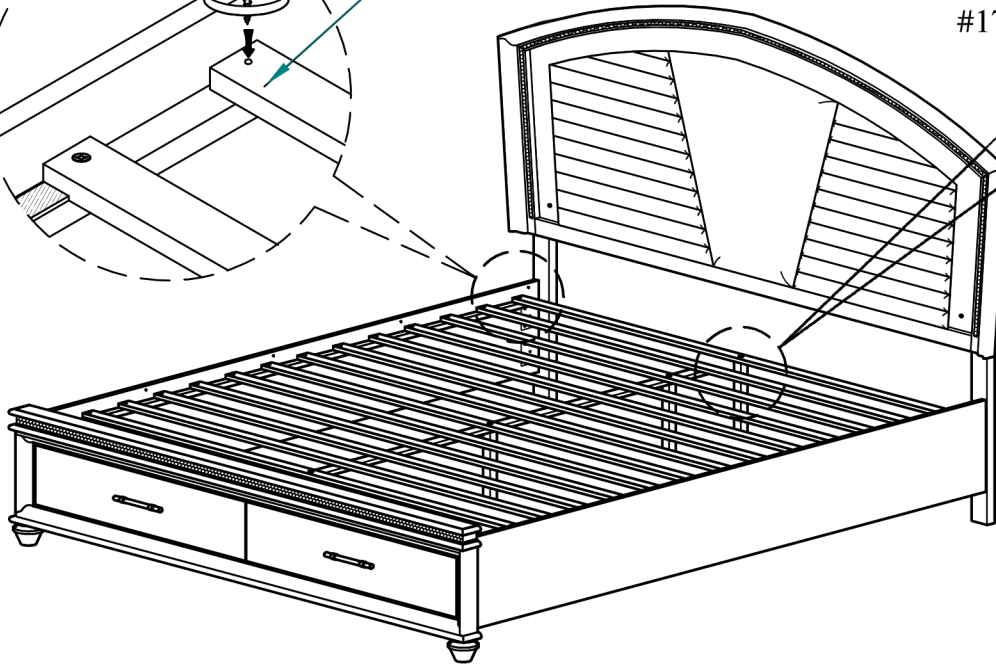


## 12

Part (#12) x 1pc

Hardware (#N) x 2pcs

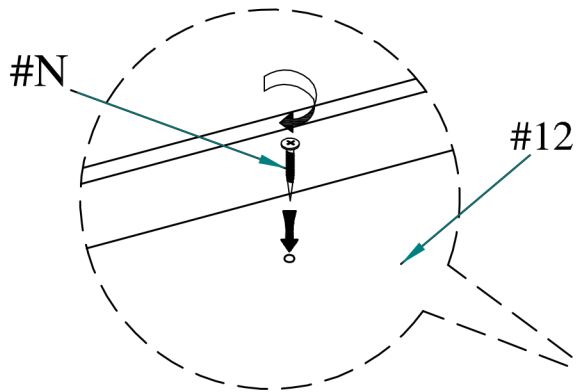


Align slat cover panel (#12) to the slat, then secure by using screws (#N).

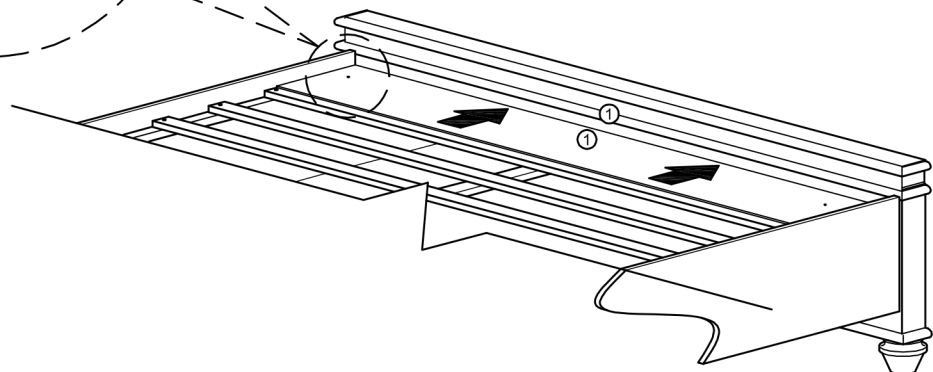


# ASSEMBLY INSTRUCTIONS

## 13

- Part (#15) x 2pcs
- Hardware (#P) x 1pc
- Hardware (#R) x 10pcs
- Hardware (#S) x 10pcs
- Hardware (#T) x 10pcs

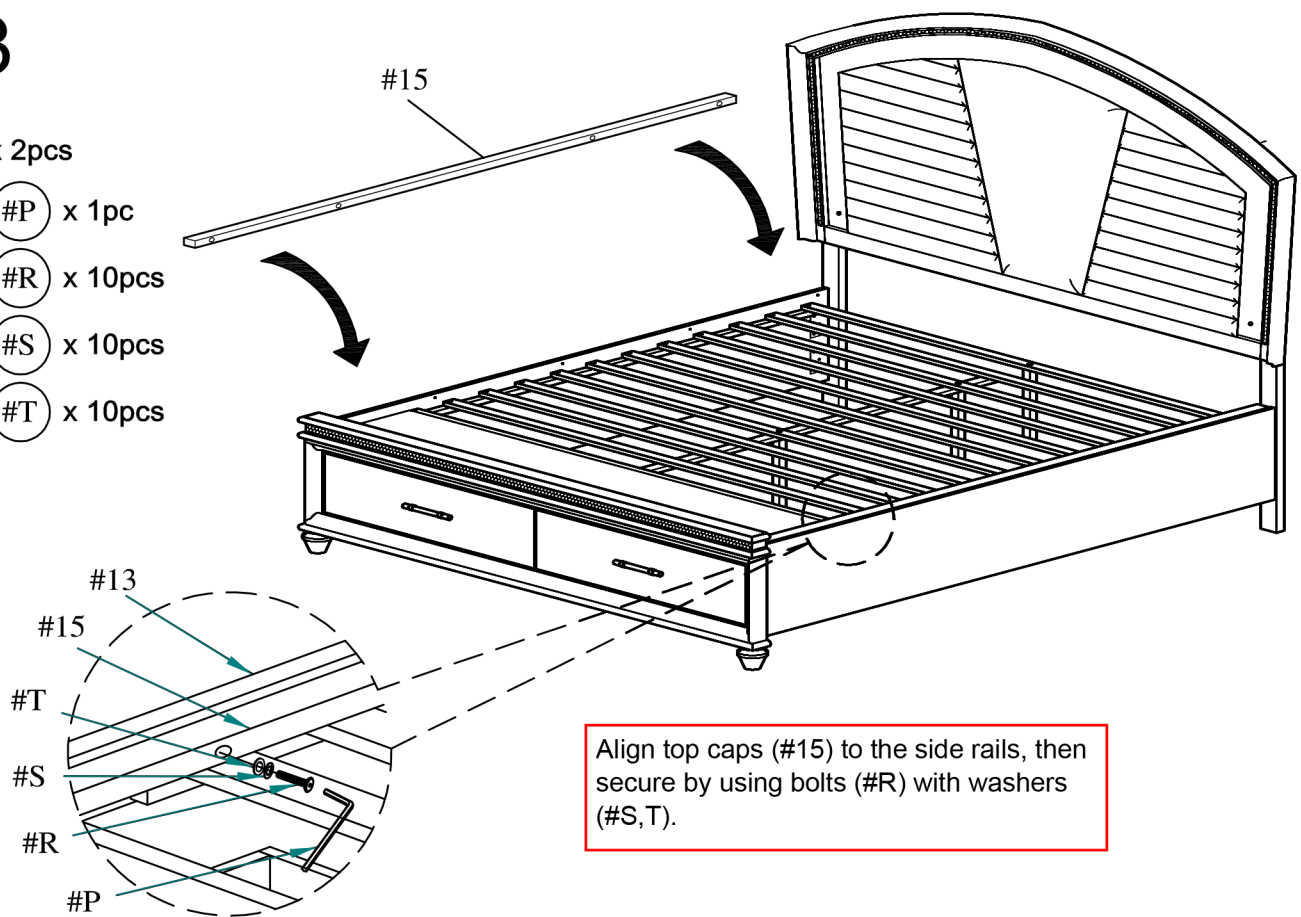

## 14

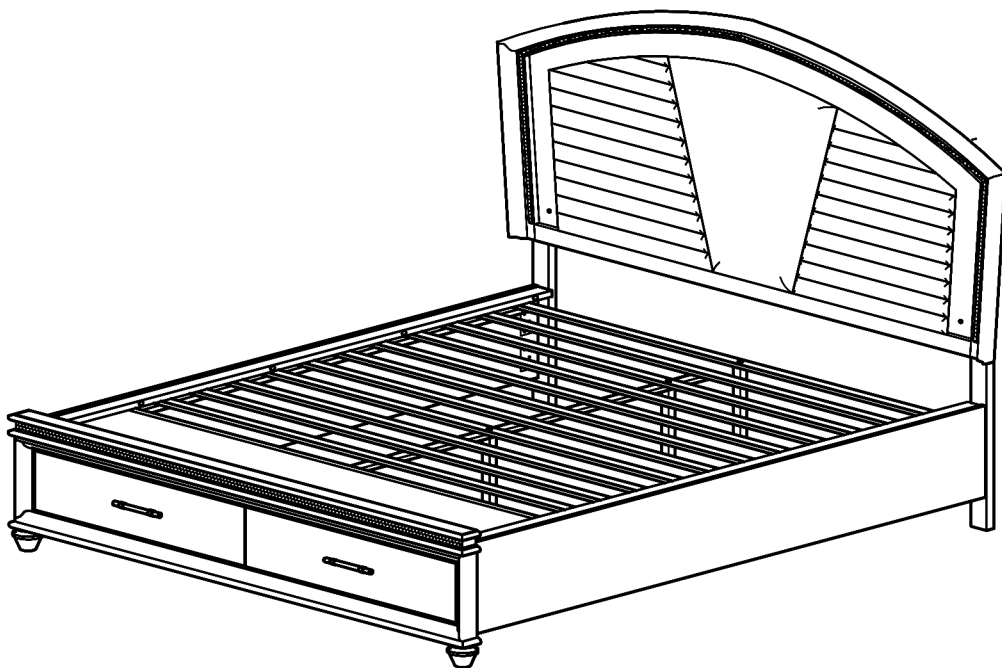

### ASSEMBLY COMPLETED



Please ensure the furniture rests on an even and flat surface. If the product wobbles or feels loose, double-check all bolts and/or screws are properly tightened and secured.



### Keep this handy!

Please retain this instruction manual and any order-related information for future reference.