
ASSEMBLY INSTRUCTIONS




- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED

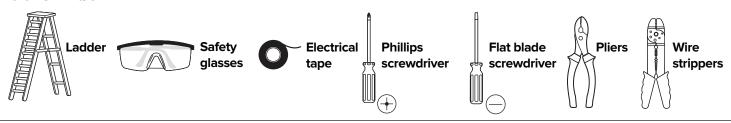


HARDWARE INCLUDED

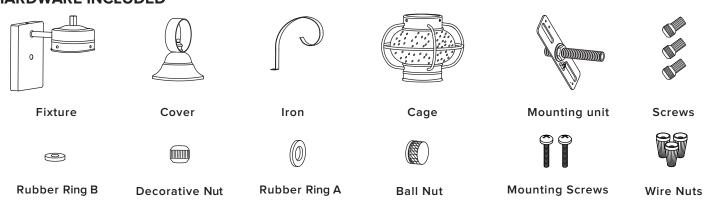

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

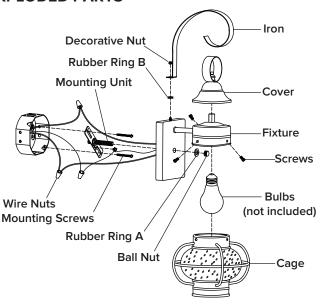

INSTALLATION

STEP 1

Unscrew the **ball nut** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box.

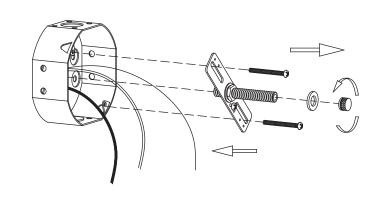

STEP 2


Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

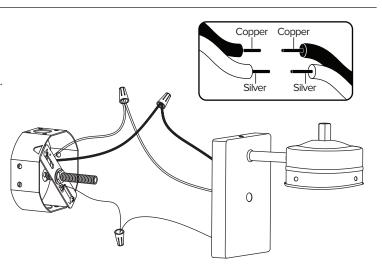


ASSEMBLY INSTRUCTIONS (INSTALLATION)

STFP 3


Attach the **fixture** to the **mounting unit** through screw holes as shown, and secure it with **rubber ring A** and **ball nut**.

NOTICE: Please use caulk in the back plate and wall mounting surface to prevent water from entering.

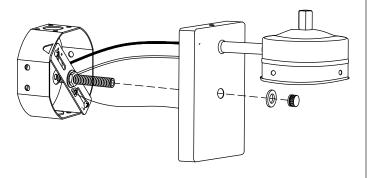


STEP 4

Attach the **cover** to the **fixture** through as shown.

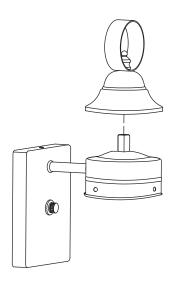


STEP 5

Attach the iron to the fixture through screw holes as shown, and secure it with $rubber\ ring\ B$ and $decorative\ nut$.

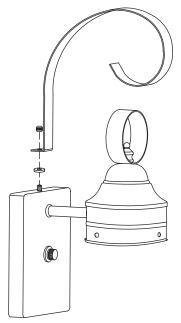

STEP 6

Install bulbs (not included)

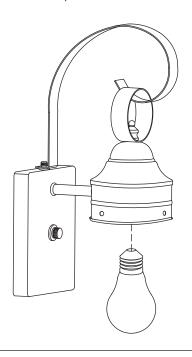

STEP 7

Attach the ${\bf cage}$ onto ${\bf fixture}$ using ${\bf screws}.$

