

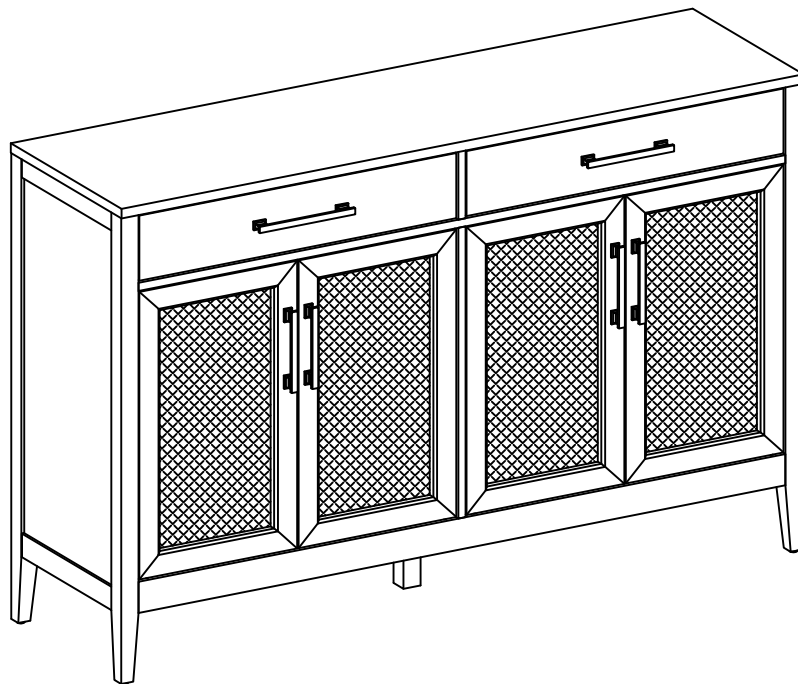
# **CROSLEY**

---






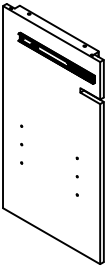








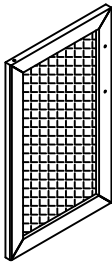
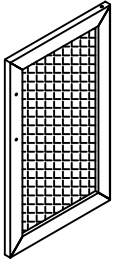

FURNITURE

Sideboard

















CF4215



# PART LIST


<b>A</b> 	<b>B</b> 	<b>C</b> 	<b>D</b> 	<b>E</b> 
Top Panel 1 PC	Left Panel 1 PC	Right Panel 1 PC	Cross Rail 1 PC	Bottom Panel 1 PC
<b>F</b> 	<b>G</b> 	<b>H</b> 	<b>I</b> 	<b>J</b> 
Partition Panel 1 PC	Drawer Front Panel 2 PCS	Drawer Left Panel 2 PCS	Drawer Right Panel 2 PCS	Drawer Back Panel 2 PCS
<b>K</b> 	<b>L</b> 	<b>M</b> 	<b>N</b> 	<b>O</b> 
Drawer Bottom Panel 2 PCS	Left Back Panel 1 PC	Right Back Panel 1 PC	Adjustable Shelf 2 PCS	Left Door Panel 2 PCS
<b>P</b> 	<b>Q</b> 			
Right Door Panel 2 PCS				
Support Leg 1 PC				

# HARDWARE LIST

<div>#1</div>  <p>Ø1/4"*25mm</p>	<div>#2</div>  <p>Ø1/4"*11mm</p>	<div>#3</div>  <p>Ø1/4"*13mm</p>	<div>#4</div>  <p>4mm*90</p>	<div>#5</div>  <p>Ø8*30mm</p>
<p>Short Bolt</p> <p>10 PCS (Extra 1)</p>	<p>Spring Washer</p> <p>12 PCS (Extra 1)</p>	<p>Flat Washer</p> <p>12 PCS (Extra 1)</p>	<p>Allen Wrench</p> <p>1 PC</p>	<p>Wood Dowel</p> <p>16 PCS (Extra 1)</p>
<div>#6</div> 	<div>#7</div>  <p>6*3*15mm</p>	<div>#8</div>  <p>Ø1/4"*51mm</p>	<div>#9</div> 	<div>#10</div> 
<p>Magnet</p> <p>2 PCS</p>	<p>Round Head Screw</p> <p>4 PCS (Extra 1)</p>	<p>Long Bolt</p> <p>2 PCS (Extra 1)</p>	<p>Barrel Nut</p> <p>2 PCS(Extra 1)</p>	<p>Drawer Handle</p> <p>2 PCS</p>
<div>#11</div> 	<div>#12</div>  <p>5/32"*25mm</p>	<div>#13</div>  <p>8*4*25</p>	<div>#14</div> 	<div>#15</div>  <p>8*3*15mm</p>
<p>Door Handle</p> <p>4 PCS</p>	<p>Round Head Bolt</p> <p>12 PCS (Extra 1)</p>	<p>Long Screw</p> <p>16 PCS (Extra 1)</p>	<p>Shelf Holder</p> <p>8 PCS (Extra 1)</p>	<p>Short Screw</p> <p>36 PCS (Extra 1)</p>
<div>#16</div>  <p>Safety Strap Kit</p> <p>1 SET</p>				

## ADDITIONAL TOOLS (Not Provided)

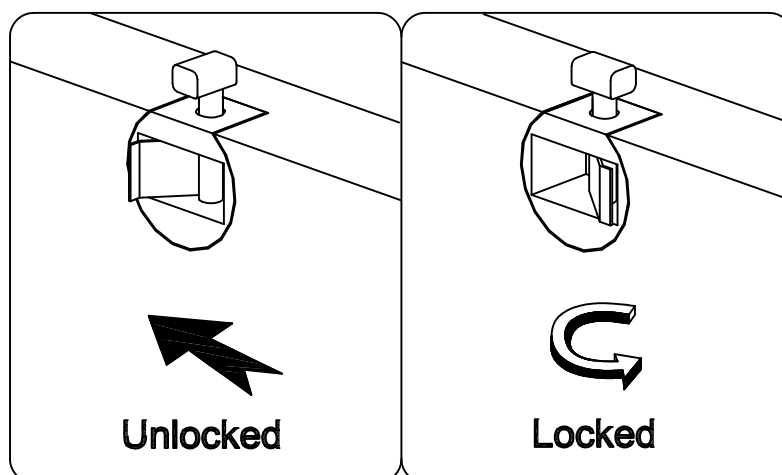
Note: It is not recommended to use power tools during assembly.



Phillips Head Screwdriver

Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.

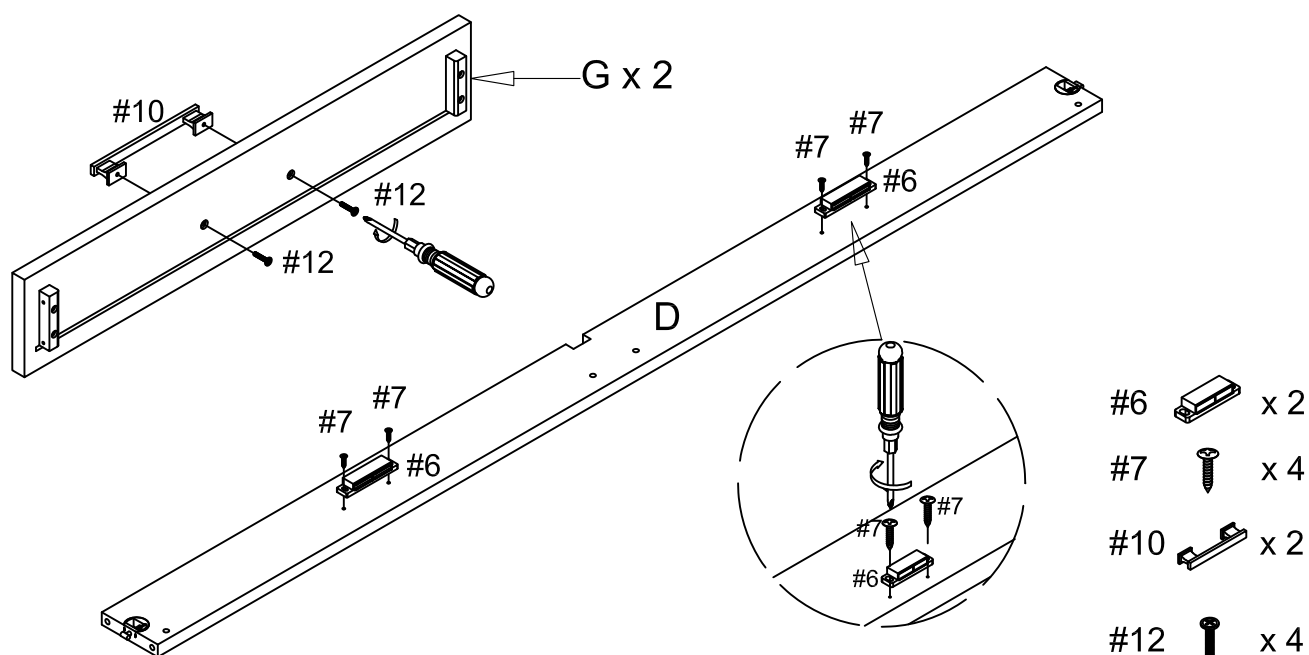
Please do not use tools to assemble this unit unless specifically indicated.



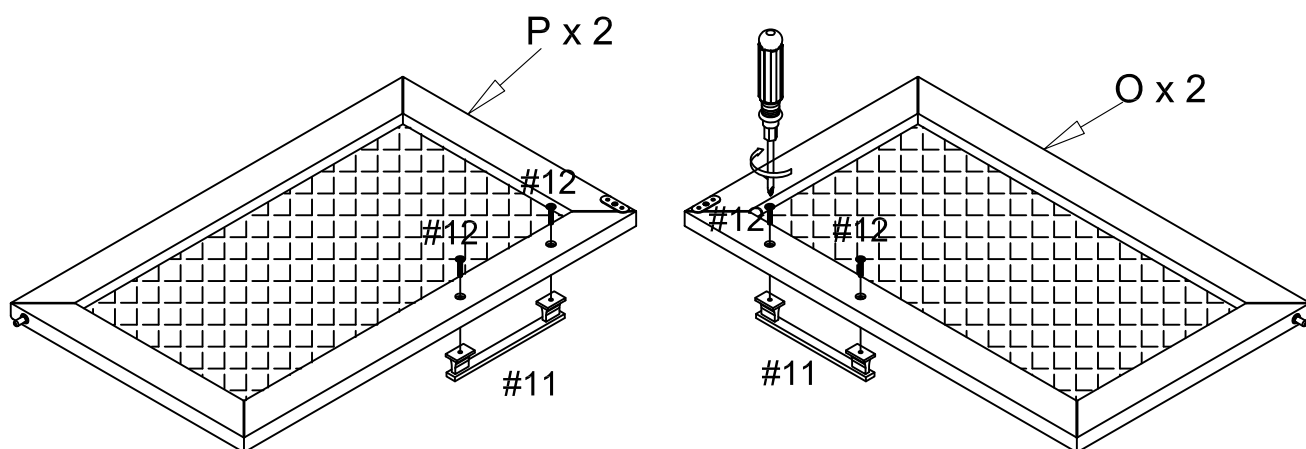
Reference the images above any time the instructions state "lock the hardware"



Note: Be sure to check all hardware is locked when completed.

Step 1. Attach magnets (part #6) to cross rail (part D) using round head screws (part #7) and phillips head screwdriver.  
Attach drawer handles (part #10) to drawer front panels (part G) using round head bolts (part #12) and phillips head screwdriver.

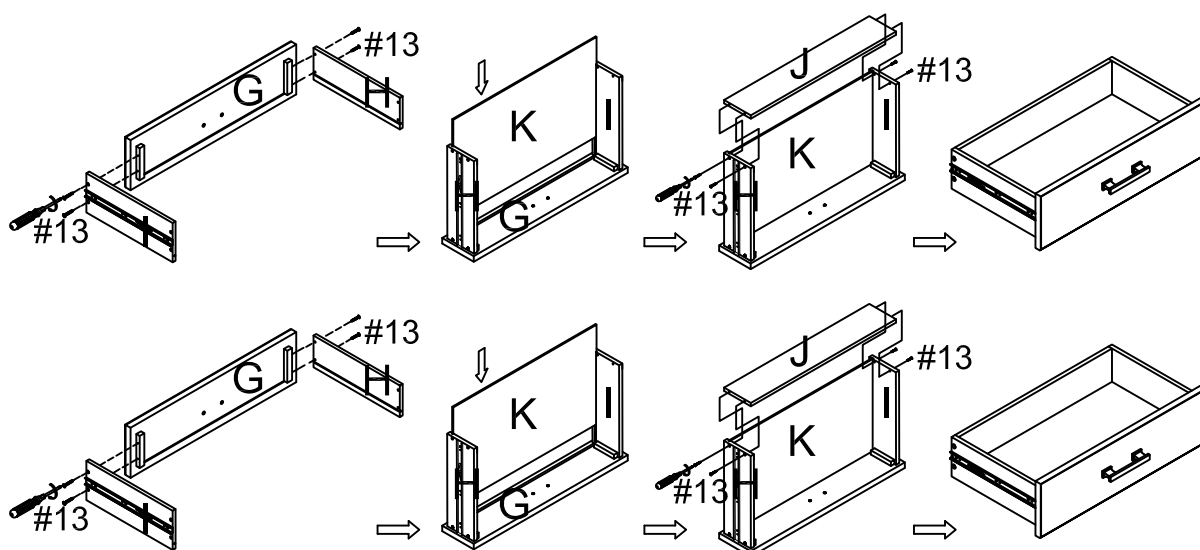


Step 2. Attach door handles (part #11) to door panels (parts O & P) using round head bolts (part #12) and phillips head screwdriver.



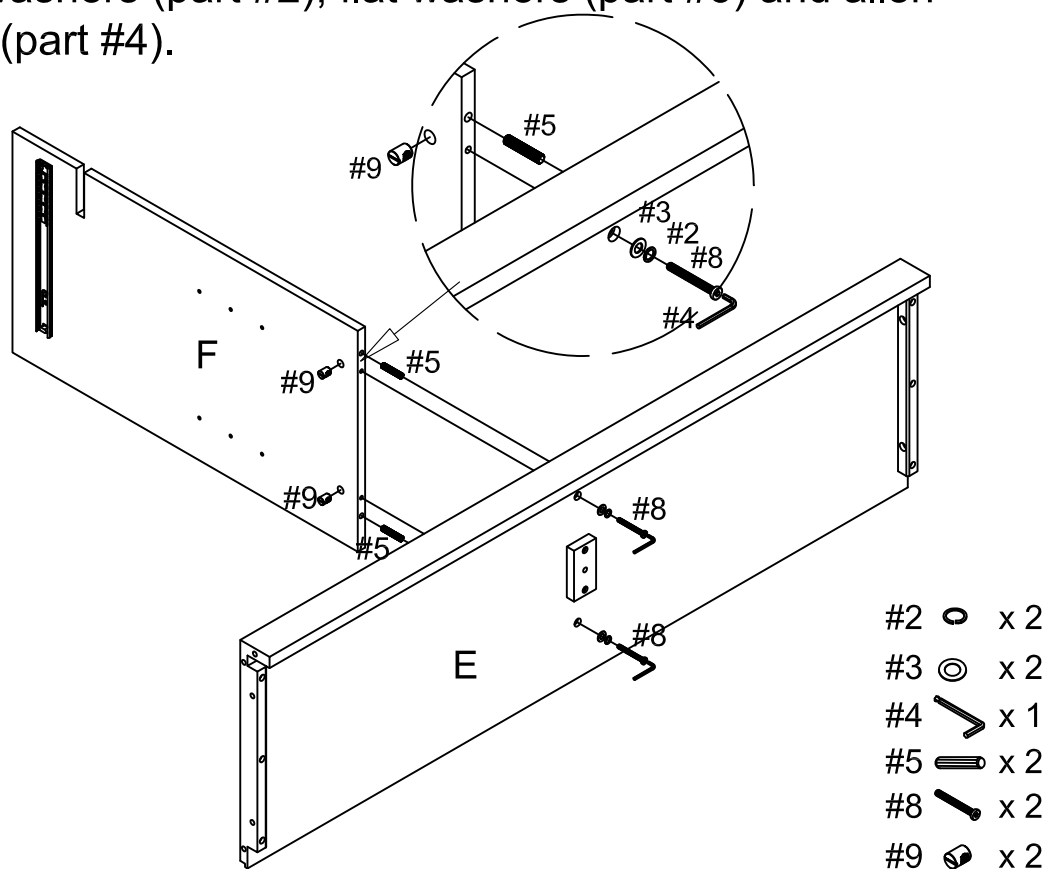
#11  x 4  
#12  x 8

Step 3. Attach drawer panels (parts H & I) to drawer front panels (part G) using long screws (part #13) and phillips head screwdriver. Slide drawer bottom panels (part K) into the grooves of assembled units (parts G, H & I). Attach drawer back panels (part J) to assembled units (parts H, I & K) using long screws (part #13) and phillips head screwdriver.

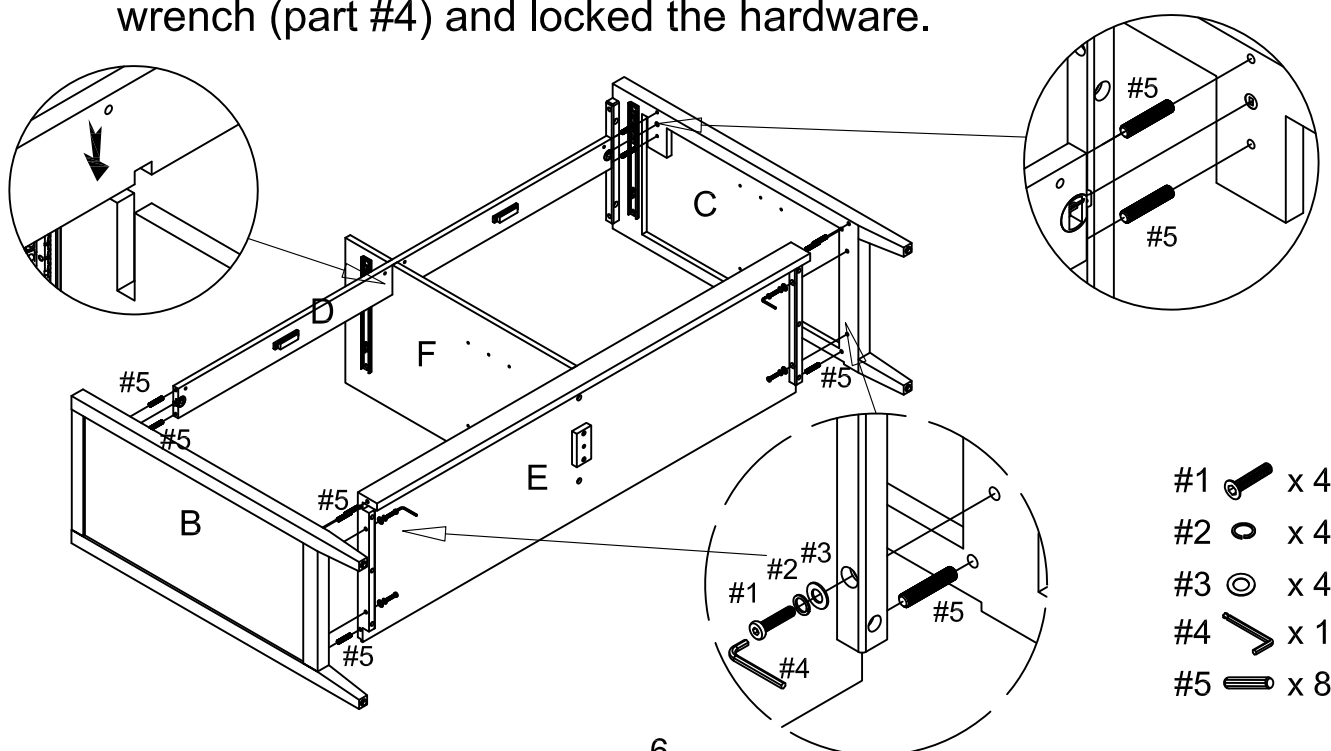


#13  x 16

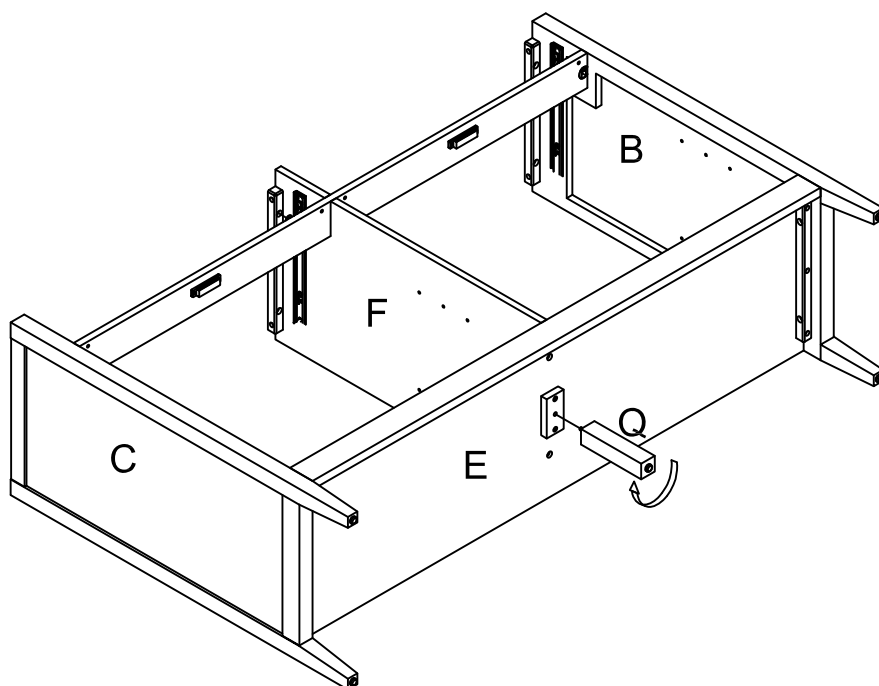
Step 4. Attach partition panel (part F) to the bottom panel (part E) using wood dowels (part #5), long bolts (part #8), barrel nuts (part #9), spring washers (part #2), flat washers (part #3) and allen wrench (part #4).



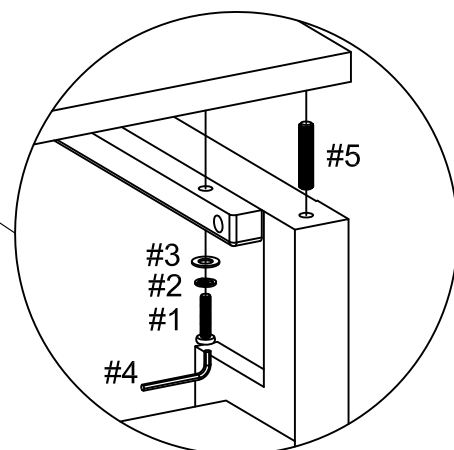
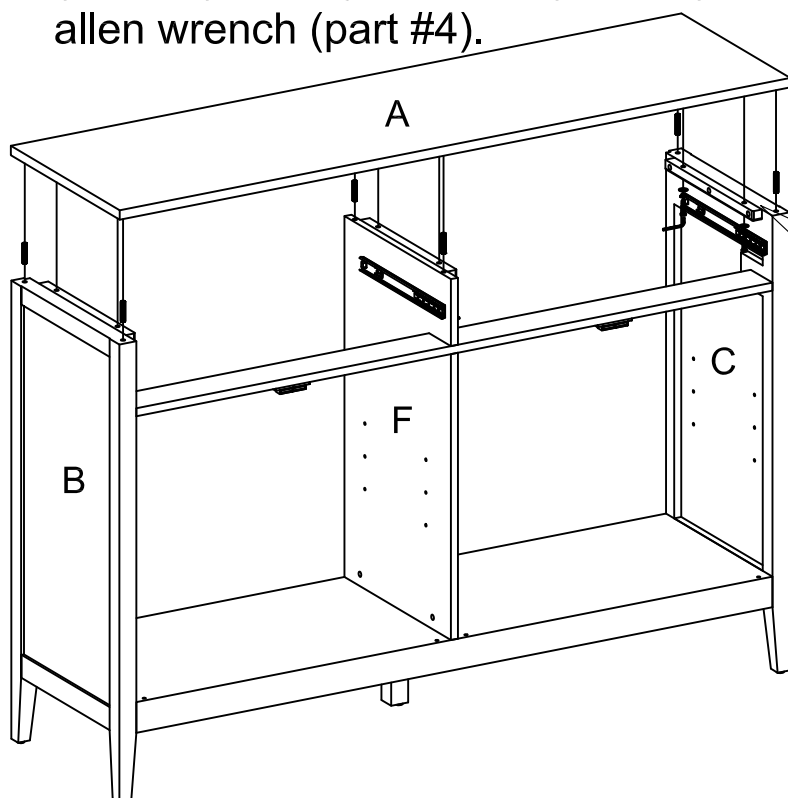
Step 5. Insert cross rail (part D) to partition panel (part F). Attach panels (parts B & C) to bottom panel (part E) and cross rail (part D) using wood dowels (part #5), short bolts (part #1), spring washers (part #2), flat washers (part #3), allen wrench (part #4) and locked the hardware.



Step 6. Attach support leg (part Q) to bottom panel (part E).

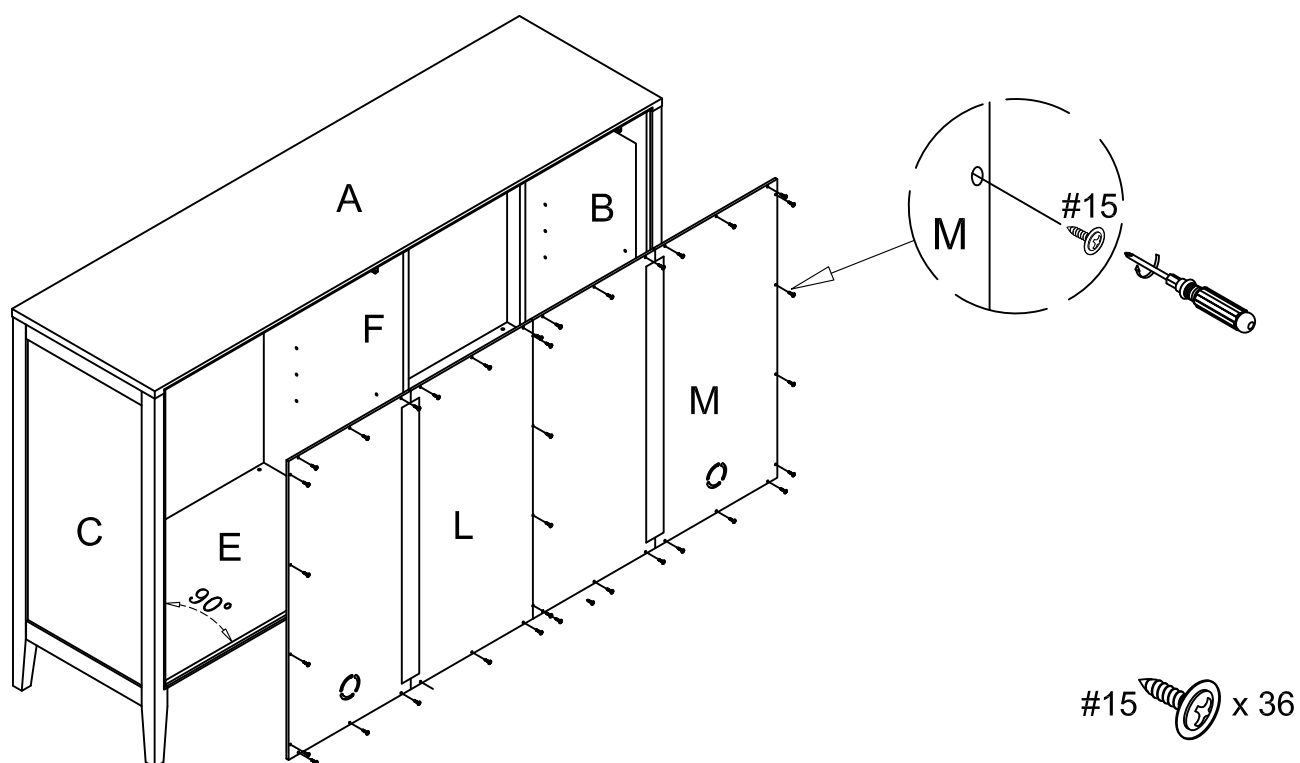


Step 7. Carefully turn unit upright. Attach top panel (part A) to assembled unit (parts B, C & F) using wood dowels (part #5), short bolts (part #1), spring washers (part #2), flat washers (part #3) and allen wrench (part #4).



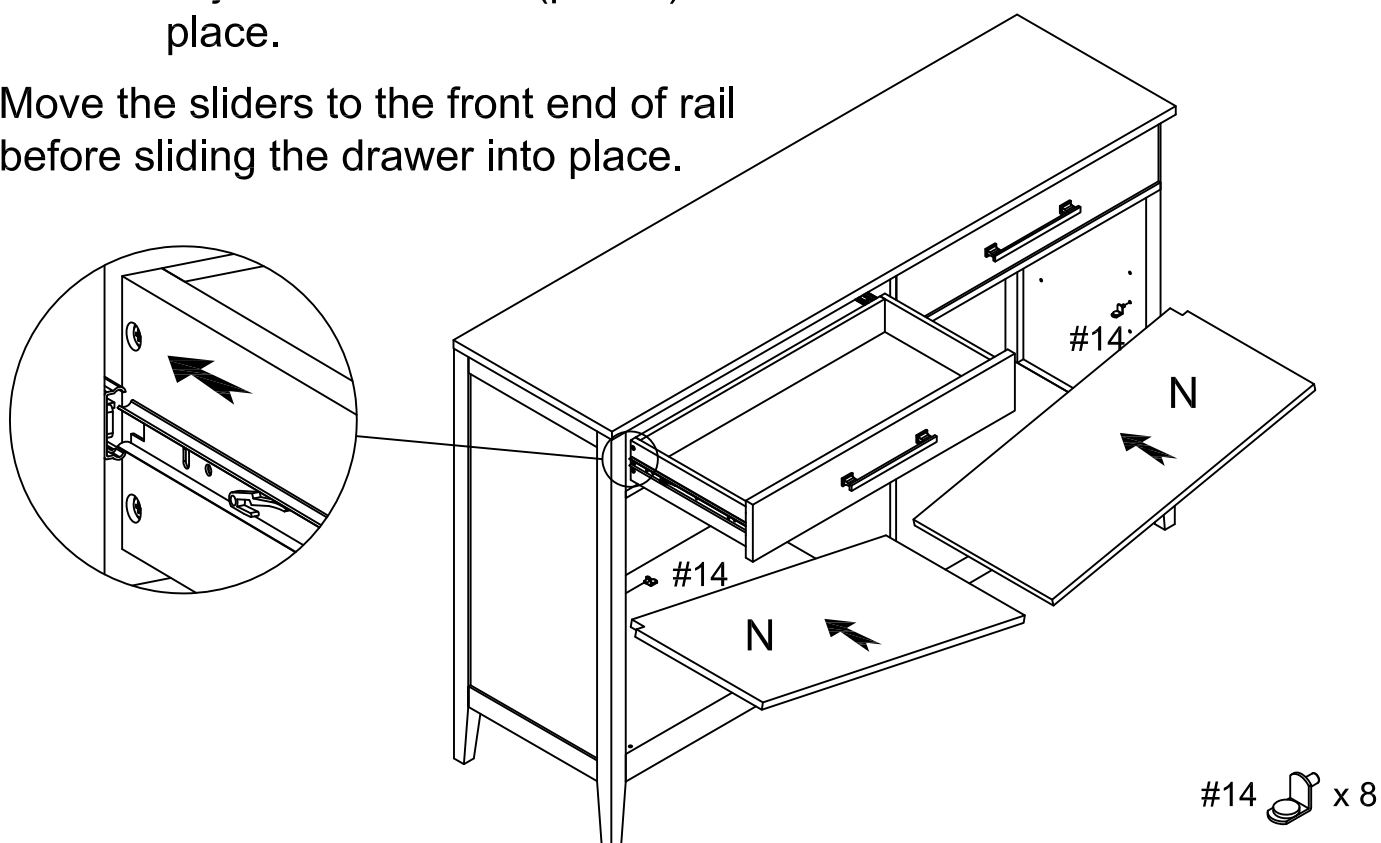
- #1  x 6
- #2  x 6
- #3  x 6
- #4  x 1
- #5  x 6

Step 8. Attach back panels (parts L & M) to assembled unit (parts A, B, C, E & F) using short screws (part #15) and phillips head screwdriver.



Step 9. Place shelf holders (part #14) into desired position, slide adjustable shelves (part N) and assembled drawers into place.

Move the sliders to the front end of rail before sliding the drawer into place.



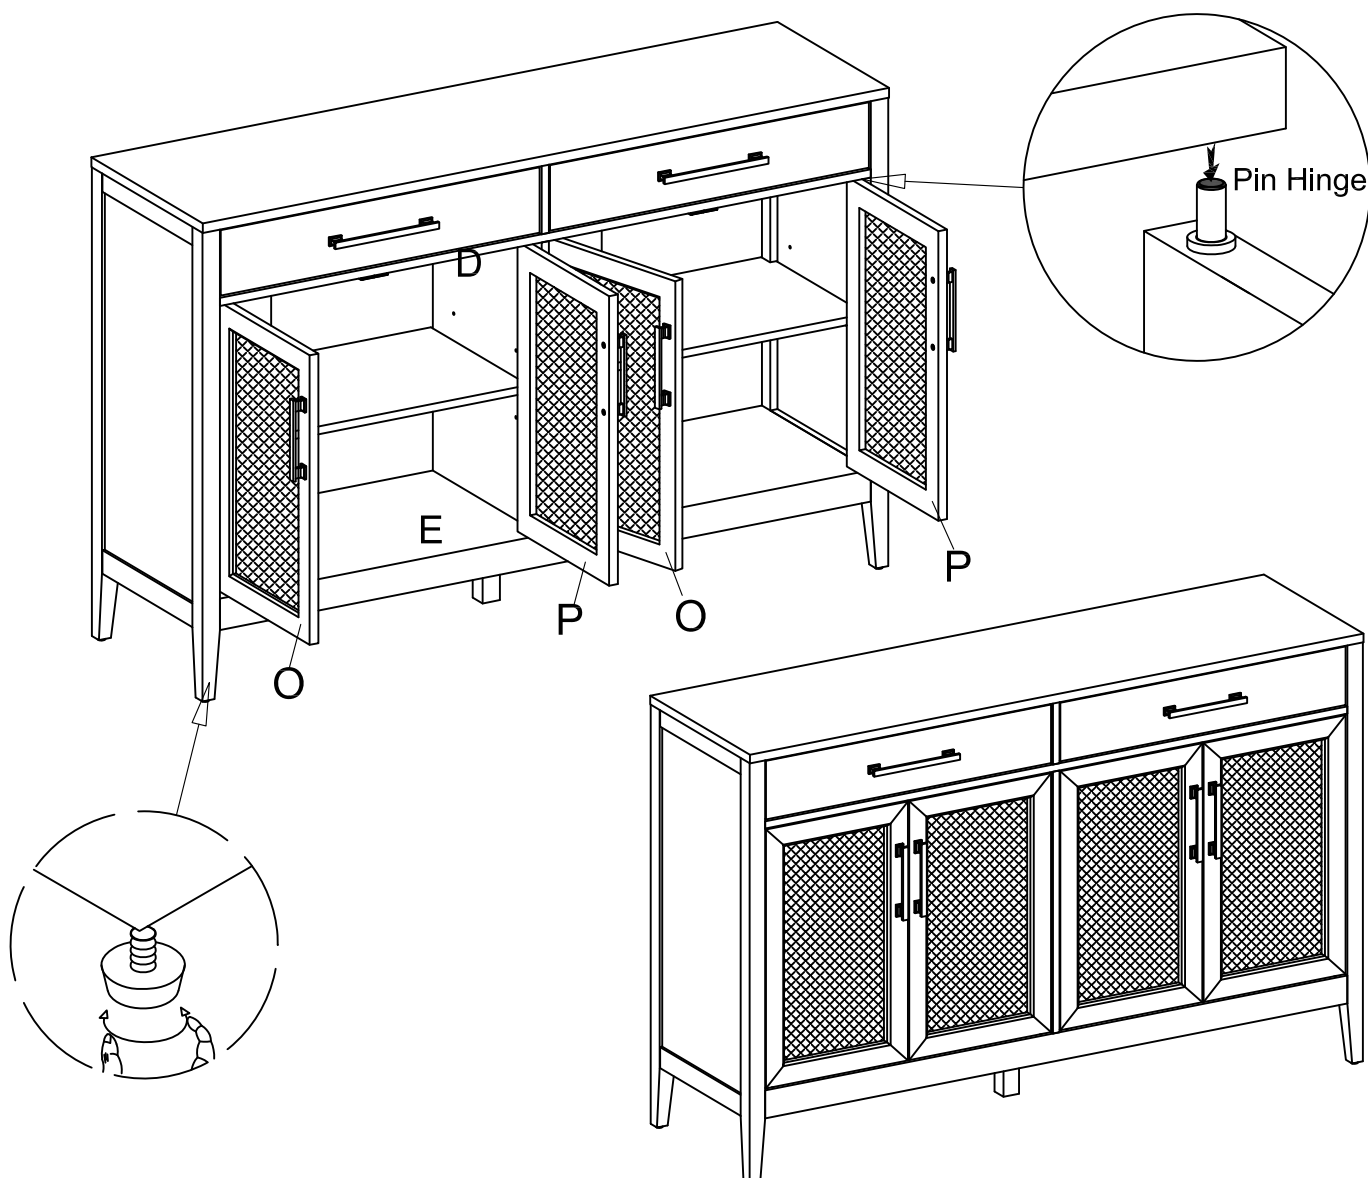








Step 10. Attach door panels (parts O & P) by placing pin hinge (pre-installed in door) in the pre-drilled hole of bottom panel (part E). Then depress the top spring-loaded pin hinge so it can be placed in the pre-drilled hole of cross rail (part D).

NOTE: Be sure top and bottom pin hinges are fully extended to secure doors in place.

NOTE: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor. if relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

Important: Safety strap kit (part #16) must be installed to prevent tipping damage and / or injury.



#16	A	B	C	D	E
					
Safety Strap Kit 1 SET	Wall Anchor 1 PC	Bracket 2 PCS	Short Screw 1 PC	Long Screw 1 PC	Safety Wall Strap 1 PC

## SAFETY WALL STRAP INSTALLATION

Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

1. Insert short screw (C) and safety wall strap (E) through bracket (B) and attach to top panel (part A) using phillips head screwdriver.
2. Drill a 1 1/32" hole where you want to secure the unit. The drilled hole will be at the same height as the hole in top panel (part A) where bracket (B) is attached. Tap wall anchor (A) into the hole.
3. Insert long screw (D) and safety wall strap (E) through bracket (B) into wall anchor (A) using phillips head screwdriver.

Note: This item is not intended for clothing storage use.

