
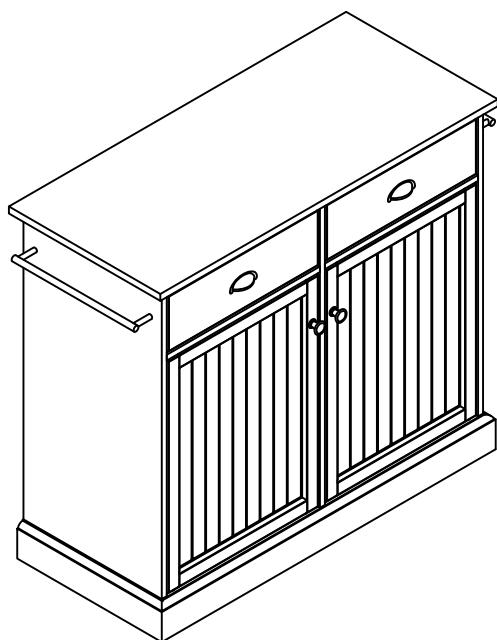


















CROSLEY
FURNITURE




Kitchen Island
CF3038



PART LIST


A	B	C	D	E
				
Top Panel 1 PC	Bottom Panel 1 PC	Left Panel 1 PC	Right Panel 1 PC	Middle Partition Panel 1 PC
F	G	H	I	J
				
Left Door Panel 1 PC	Right Door Panel 1 PC	Left Cross Rail 1 PC	Right Cross Rail 1 PC	Front Top Rail 1 PC
K	L	M	N	O
				
Back Top Panel 1 PC	Back Bottom Rail 1 PC	Back Partition Rail 2 PCS	Back Panel 3 PCS	Adjustable Shelf 2 PCS
P	Q	R	S	T
				
Drawer Front Panel 2 PCS	Drawer Left Panel 2 PCS	Drawer Right Panel 2 PCS	Drawer Back Panel 2 PCS	Drawer Bottom Panel 2 PCS
U				
				
Towel Bar 2 PCS				

HARDWARE LIST

#1	#2	#3	#4	#5
 Ø8*30mm Short Wood Dowel 27 PCS (Extra 1)	 Ø8*50mm Long Wood Dowel 1 PC	 Cam Lock 18 PCS (Extra 1)	 Cam Bolt 18 PCS (Extra 1)	 Barrel Nut 6 PCS
#6	#7	#8	#9	#10
 2"**Ø1/4"**D11mm Long Bolt 6 PCS (Extra 1)	 1-1/4"**Ø1/4"**D11mm Short Bolt 4 PCS (Extra 1)	 3/4"**Ø5/32"**D9 Long Round Head Bolt 2 PCS (Extra 1)	 1/2"**Ø5/32"**D9 Short Round Head Bolt 4 PCS (Extra 1)	 12*Ø3*D6mm Round Head Screw 8 PCS (Extra 1)
#11	#12	#13	#14	#15
 1-1/4"**Ø3.5*D8mm Flat Head Screw 1 PC	 1"**Ø3.5*D8mm Short Flat Head Screw 16 PCS (Extra 1)	 Magnet 4 PCS	 Knob 2 PCS	 Handle 2 PCS
#16	#17	#18		
 Shelf Holder 8 PCS (Extra 1)	 Adjustable Leveler 4 PCS	 Allen Wrench 1 PC		

ADDITIONAL TOOLS (Not Provided)

Note: It is not recommended to use power tools during assembly.




Phillips Head Screwdriver

Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.


Step 1. Attach cam bolts (part #4) to panels (parts A, C, D & E) using phillips head screwdriver.

NOTE: Do not overtighten cam bolts. Stop tightening once the threads on cam bolt are no longer visible.

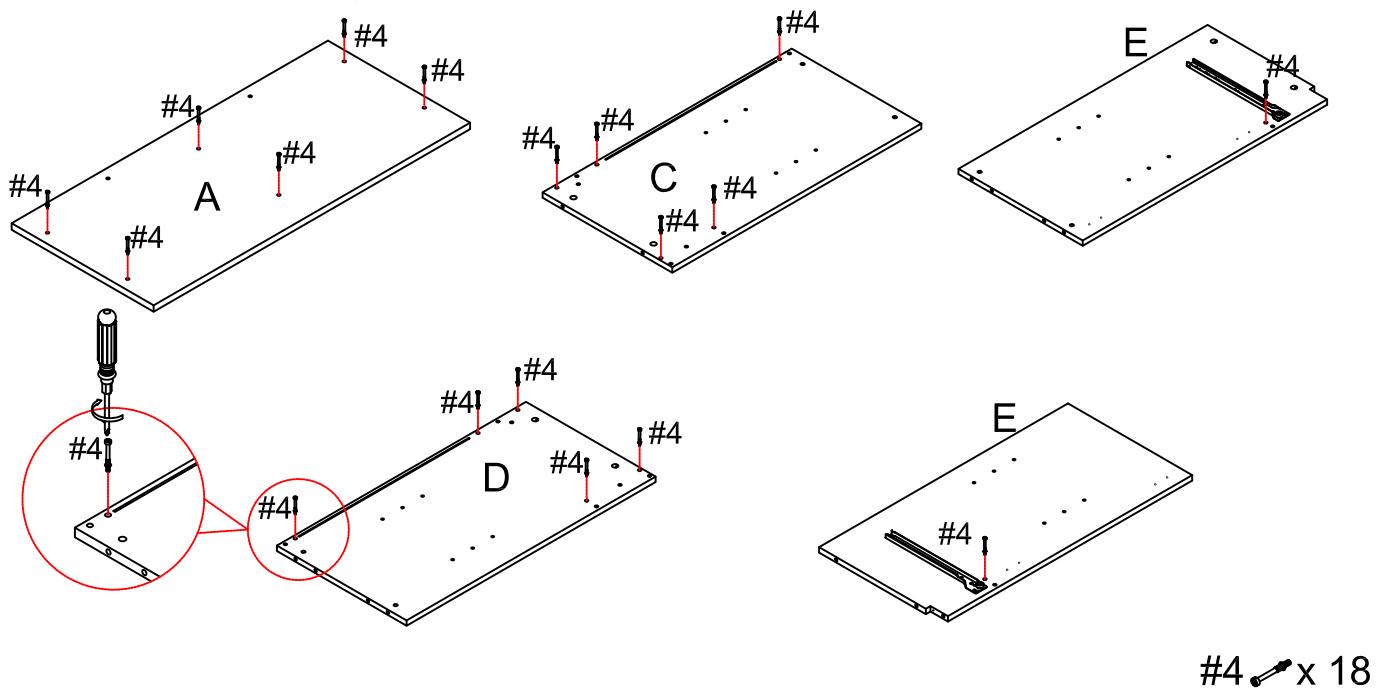


#4 x 18

Step 2. Attach magnets (part #13) to middle partition panel (part E) using round head screws (part #10) and phillips head screwdriver. Attach knobs (part #14) to door panels (parts F & G) using long round head bolts (part #8) and phillips head screwdriver.

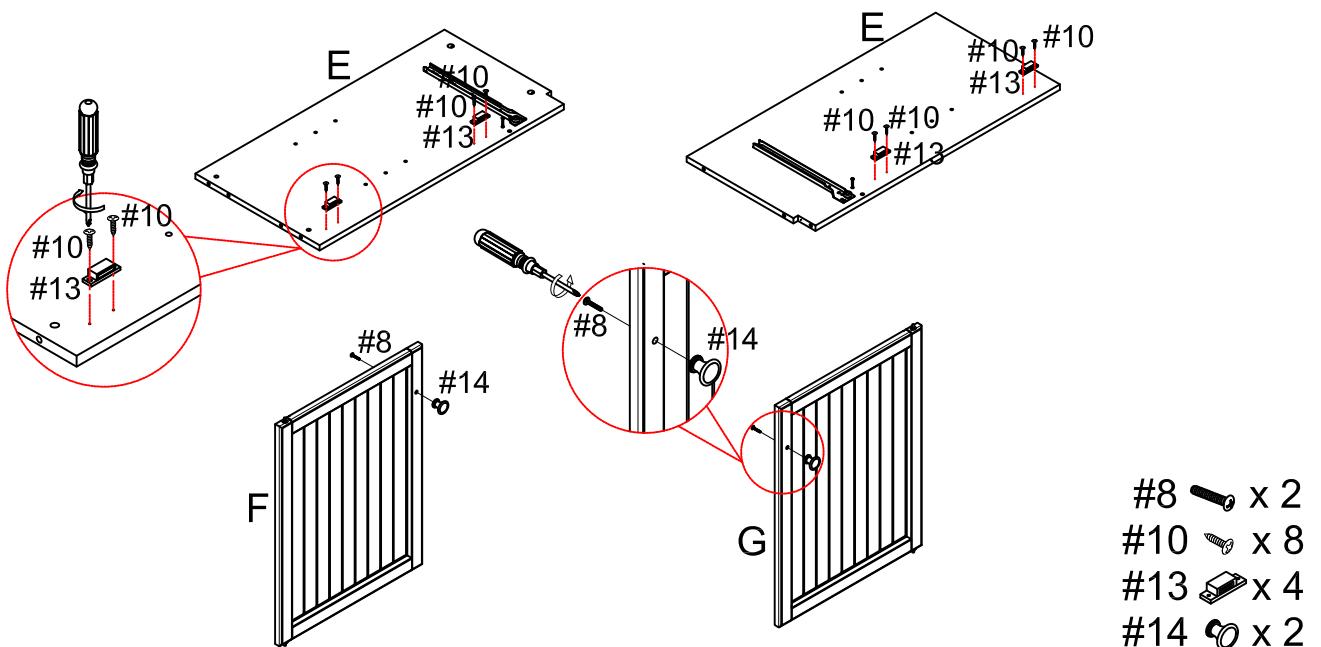


#8 x 2
#10 x 8
#13 x 4
#14 x 2

Step 3. Attach handle (part #15) to drawer front panel (part P) using short round head bolts (part #9) and phillips head screwdriver. Attach drawer panels (parts Q & R) to drawer front panel (part P) using short flat head screws (part #12) and phillips head screwdriver. Slide drawer bottom panel (part T) into grooves of assembled unit (parts P, Q & R) . Attach drawer back panel (part S) to assembled unit (parts Q, R & T) using short flat head screws (part #12) and phillips head screwdriver. Repeat for remaining drawer.

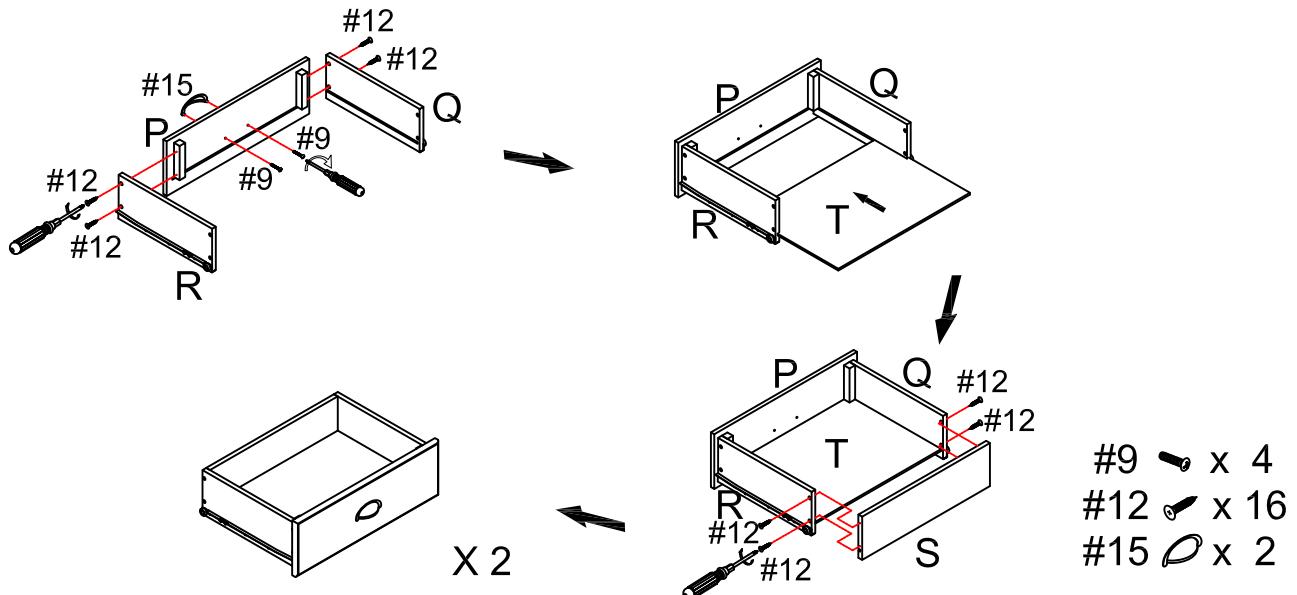


Step 4. Attach front top rail (part J) to middle partition panel (part E) using short wood dowel (part #1), flat head screw (part #11) and phillips head screwdriver. Attach cross rails (parts H & I) to middle partition panel (part E) using long wood dowel (part #2) and cam locks (part #3).

NOTE: Cam locks must rotate a full 180°. See pictured insert.

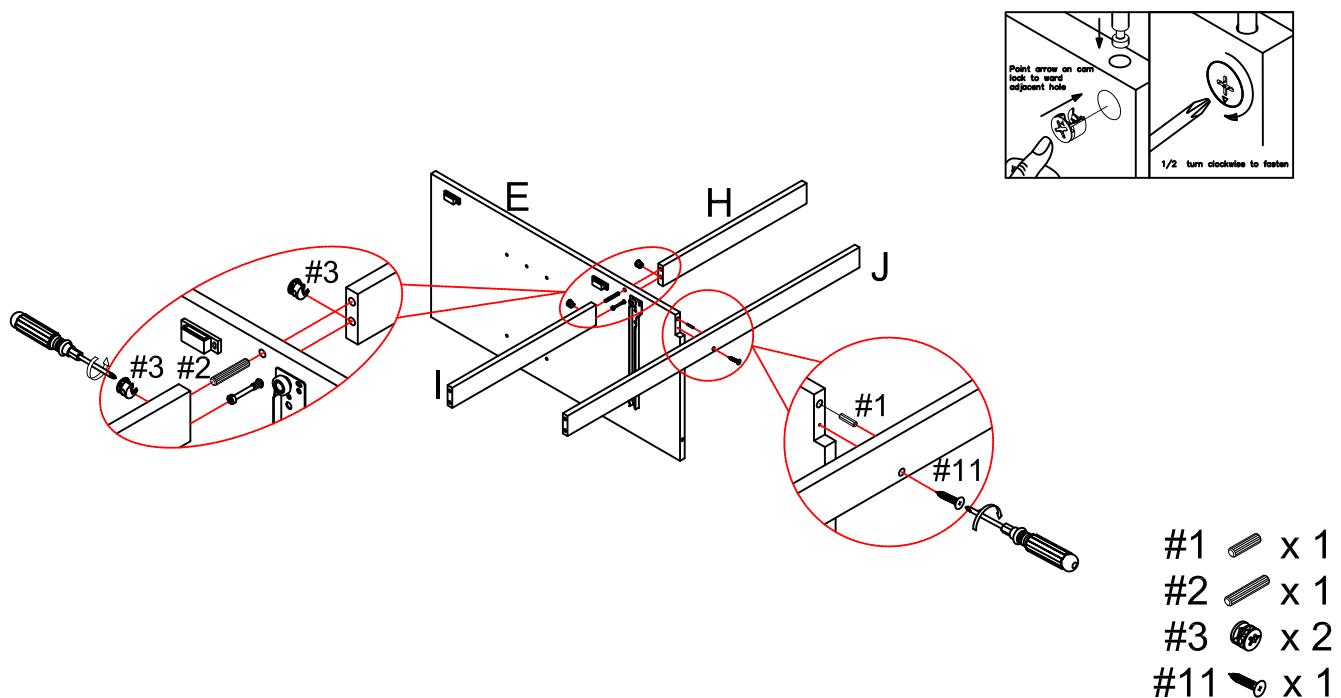


Step 5. Attach back top panel (part K) to left panel (part C) using short wood dowel (part #1) and cam locks (part #3). Attach back partition rails (part M) to back top panel (part K) using short wood dowels (part #1). Slide back panels (part N) into grooves of assembled unit (parts C, K & M).

NOTE: Cam locks must rotate a full 180°. See pictured insert.

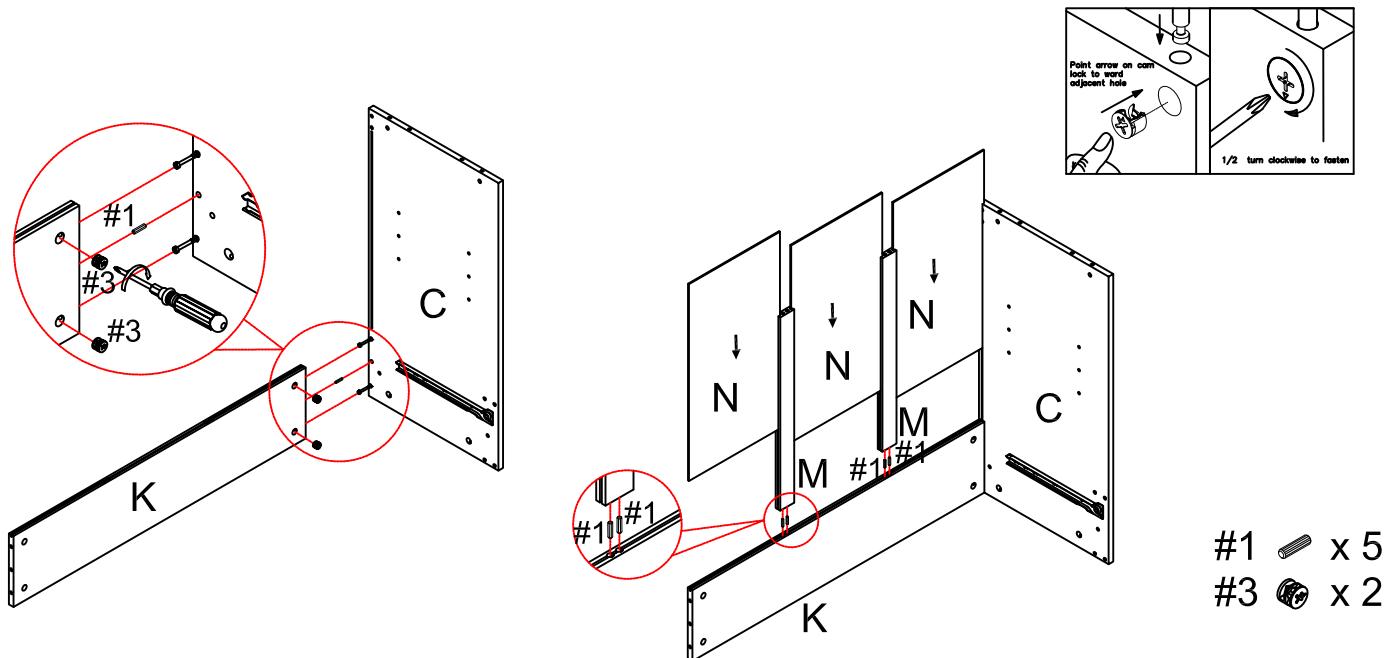


Step 6. Attach back bottom rail (part L) to assembled unit (parts C, M & N) using short wood dowels (part #1) and cam lock (part #3). Attach assembled unit (parts H & J) to left panel (part C) using short wood dowels (part #1) and cam locks (part #3).

NOTE: Cam locks must rotate a full 180°. See pictured insert.

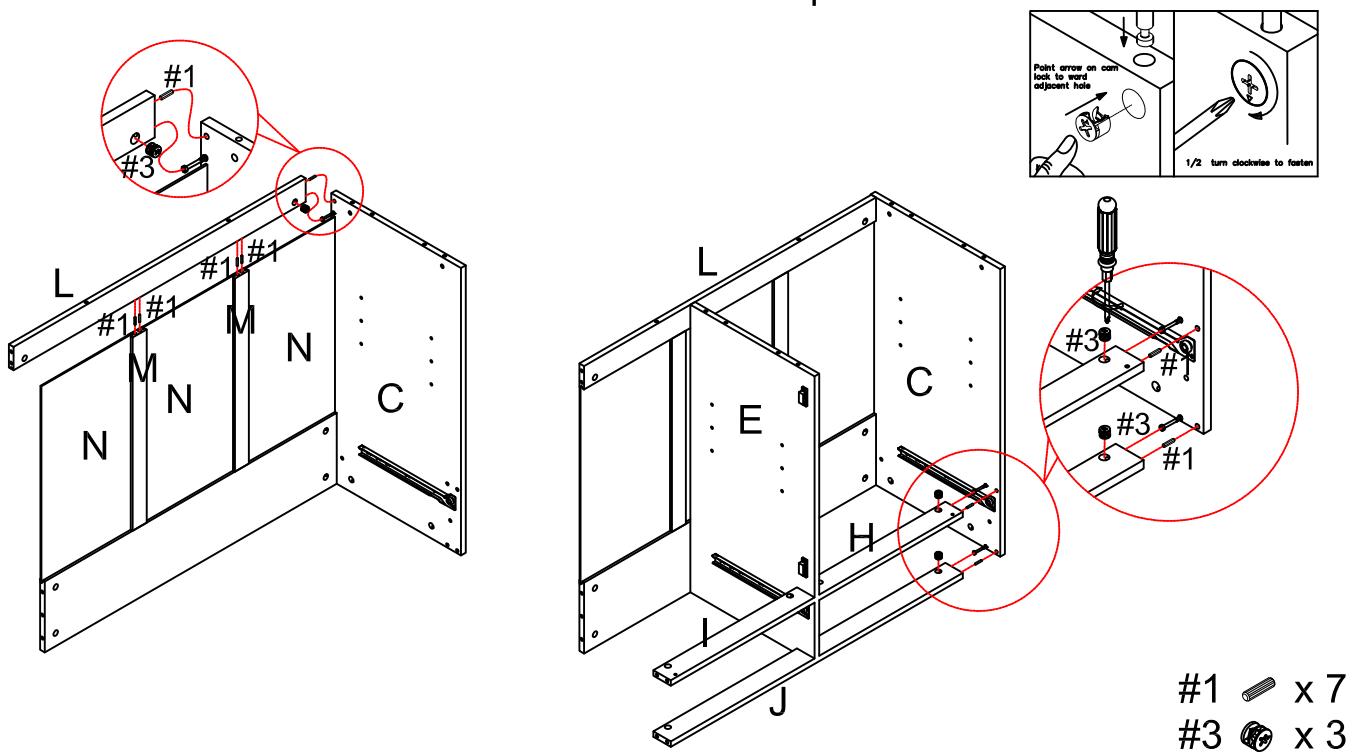


Step 7. Attach right panel (part D) to assembled unit (parts I, J, K, L & N) using short wood dowels (part #1) and cam locks (part #3).


NOTE: Cam locks must rotate a full 180°. See pictured insert.

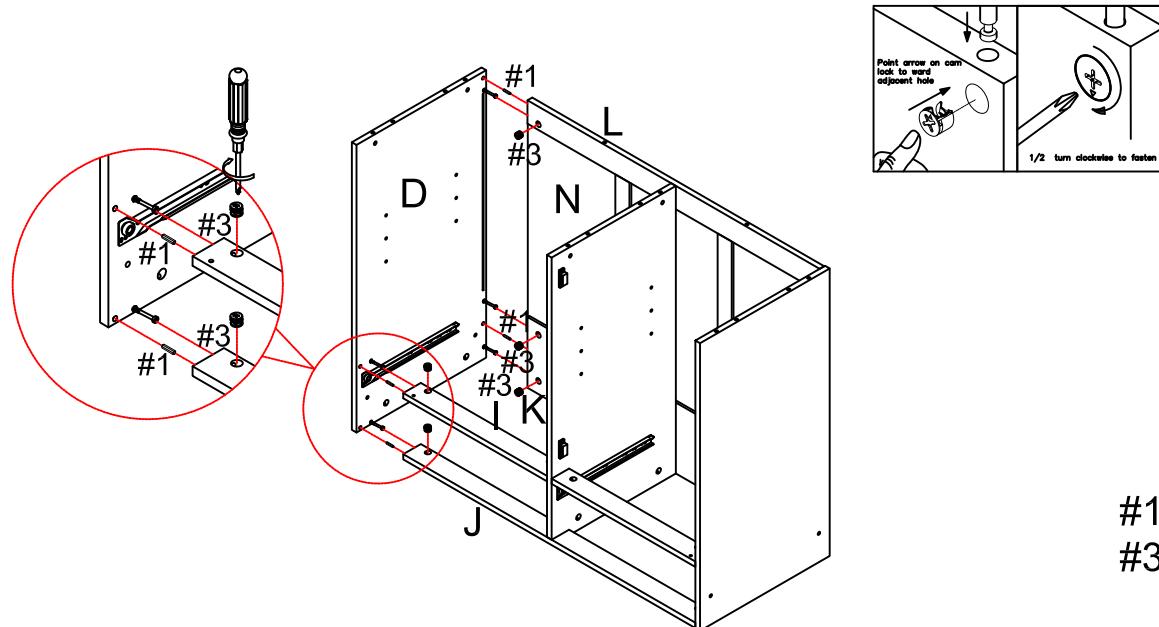

Step 8. Attach bottom panel (part B) to assembled unit (parts C, D, E & L) using short wood dowels (part #1), barrel nuts (part #5), long bolts (part #6) and allen wrench (part #18). Attach adjustable levelers (part #17) to bottom panel (part B).

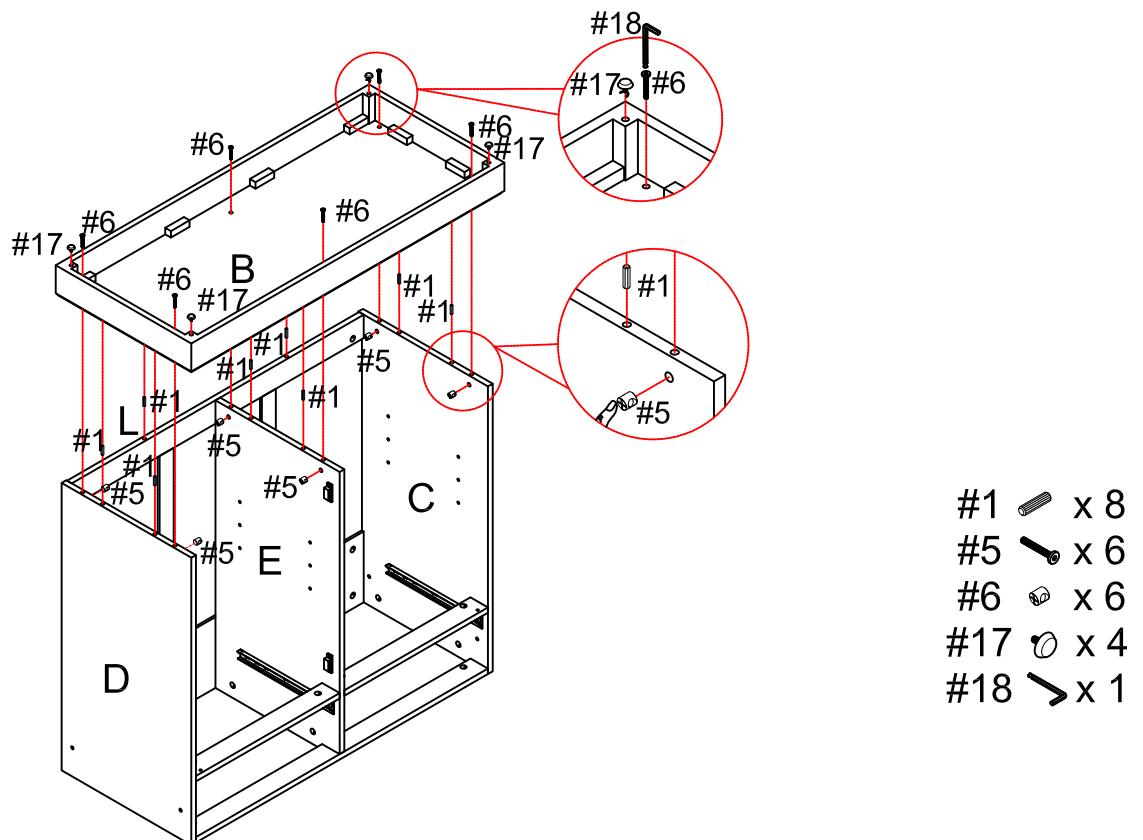


Step 9. Carefully turn unit upright. Attach towel bars (part U) to panels (parts C & D) using short bolts (part #7) and allen wrench (part #18).

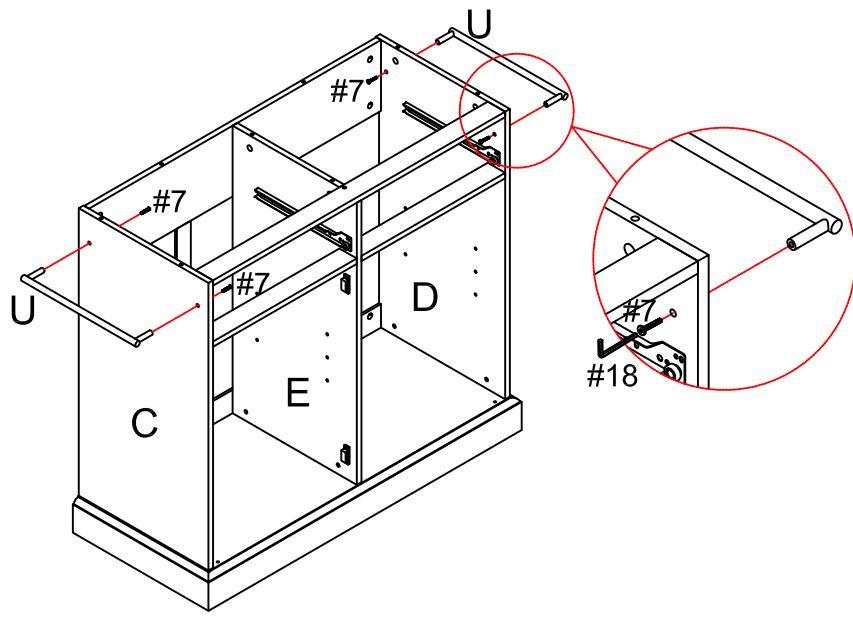


Step 10. Attach top panel (part A) to assembled unit (parts C, D, E & K) using short wood dowels (part #1) and cam locks (part #3).

NOTE: Cam locks must rotate a full 180°. See pictured insert.

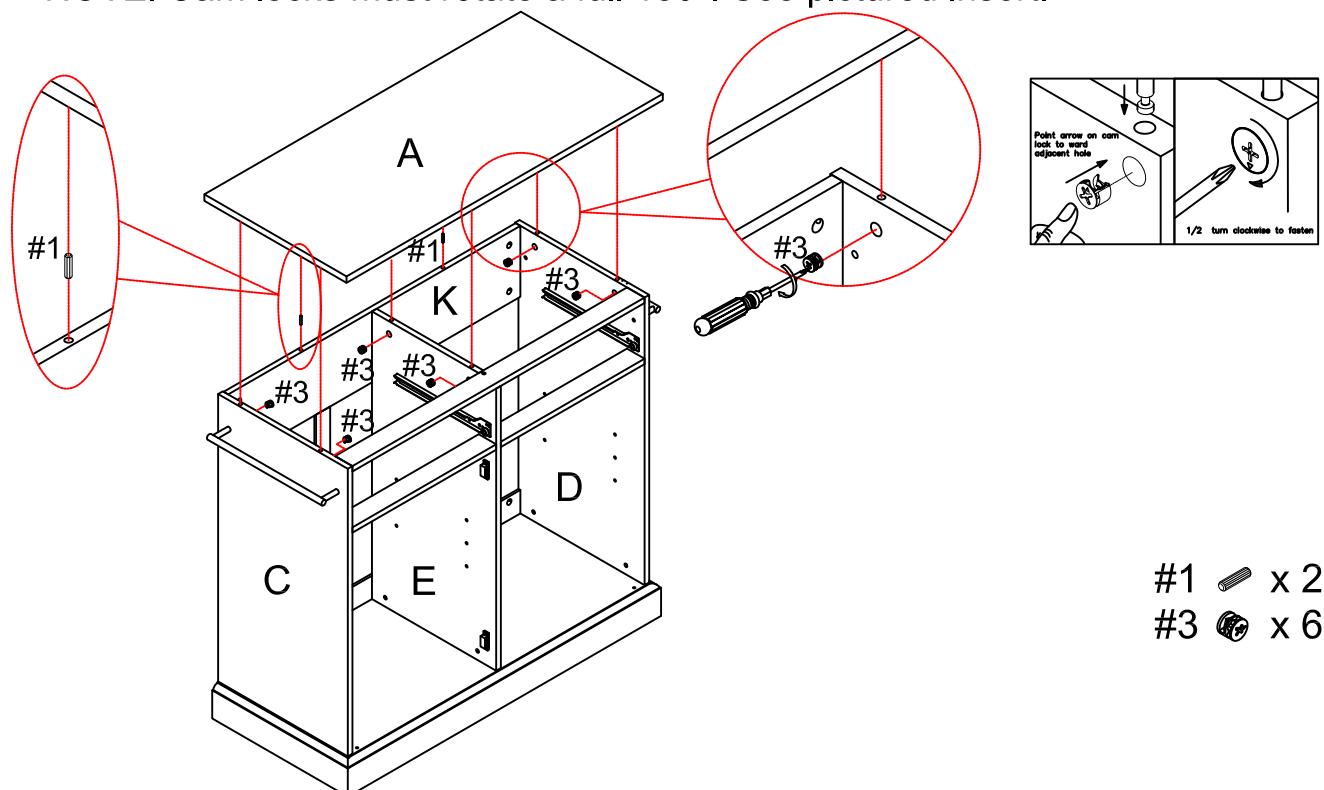


Step 11. Place shelf holders (part #16) into desired position and then slide adjustable shelves (part O) into place.

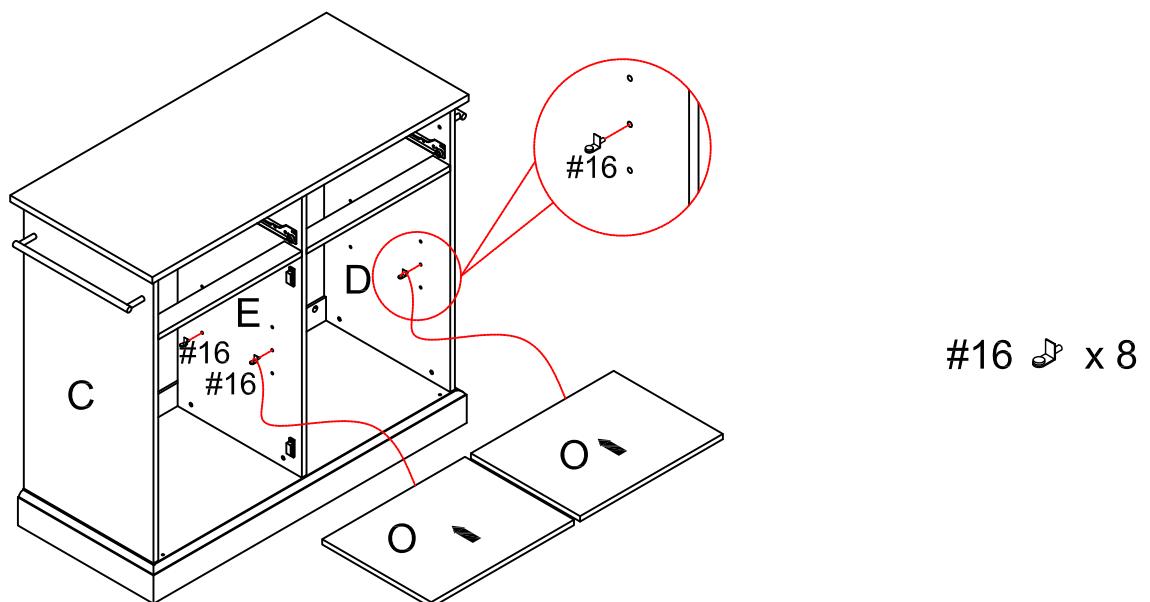

Step 12. Attach door panels (parts F & G) by placing bottom pin hinge (pre-installed in door) in the pre-drilled hole of bottom panel (part B). Then depress the top spring-loaded pin hinge so it can be placed in the pre-drilled hole of cross rails (parts H & I) .

NOTE: Be sure top and bottom pin hinges are fully extended to secure doors in place.

NOTE: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor. If relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

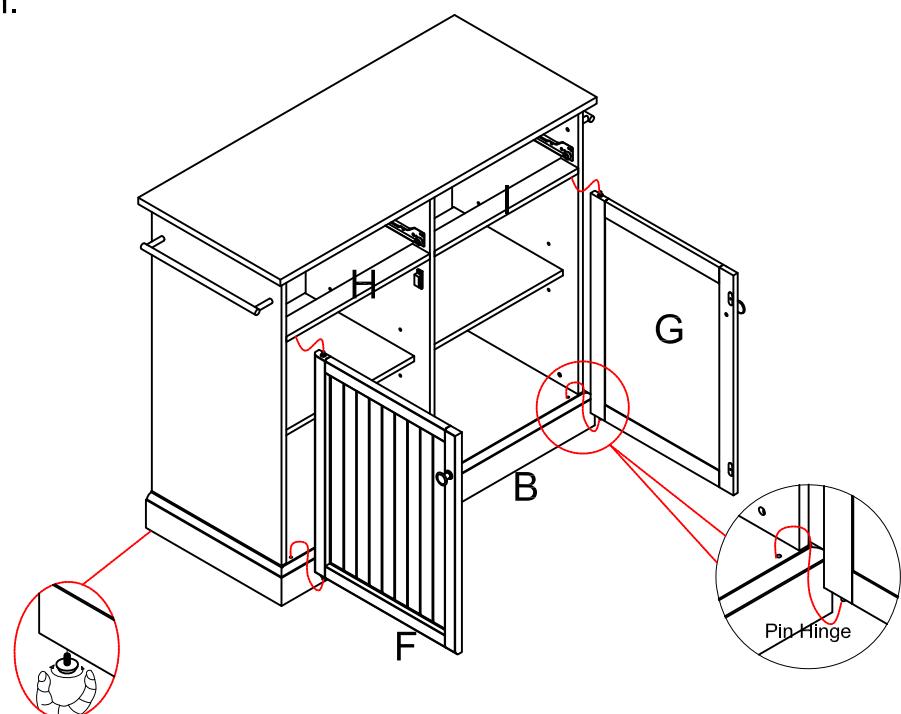

Step 13. Slide assembled drawers into place.

