Instruction Manual


(To reduce the risk offire, electric shock, or injury to persons):

- 1. We suggest installation by a licensed electrician.
- 2. Before you start, A). Go to the main fuse, or circuit breaker, box in your home.

Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position.

- 3. Make sure that the ceiling or wall can bear the weight of the lamp before fixture.
- 4. Make sure the voltage you are using is 110V. The maximum wattage is 60W per bulb.
- 5. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- 6. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur.

Installation steps:

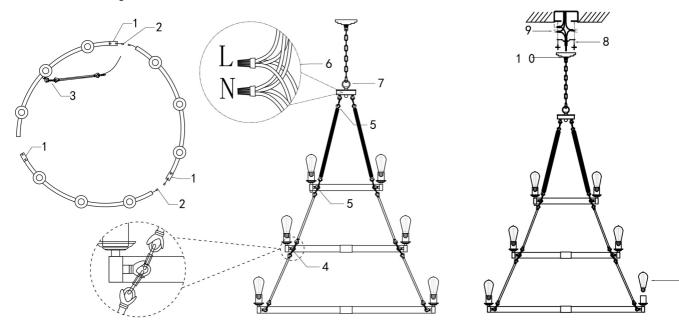

- 1. Install the connecting part with serial NO.1 onto the lamp body.
- 2. Connect the wires of the lamp body in series with the corresponding male and female plugs, and use connecting iron pieces to form a whole circle (Same spelling in big circle and middle circle)
- 3. Thread the power cord through the short suspension rod and hang it on the large circle.
- 4. Hang the large circle on the middle circle and the middle circle on the small circle.
- 5. Thread the power cord through a long suspension rod and hang it on a small circle, with one end attached to the lamp body.
- 6. There are a total of 3 power lines in the 3 circles, which are respectively threaded out from the suspension rod.
- 7. Connect the suspension chain assembly to the lamp body.
- 8. Lock the hanging board onto the junction box
- 9. Connect the live wire (L), neutral wire (N), and grounding wire (E) to the junction box.
- 10. Install and secure the ceiling plate.
- 11. Install E26 light bulb.