### NOTICE


- \*Please make sure that you have all part indicated and they are in good condition before you begin assembly of this item. Refer to part list and hardware list below for guidance.
- \*This item should be assembled on a soft surface to prevent scratching the finish during assembly.
- \*This item may require periodic tightening.
- \*If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

### **PREPARATION**

- \*Before beginning assembly of product, make sure all part are present. Compare part with part contents list and hardware contents list.
- \*If any part is missing or damaged, do not attempt to assemble the product.
- \*Estimated Assembly Time: 60 minutes.
- \*Tools Required for Assembly (included): Allen Key

## **CARE AND MAINTENANCE**


Always use felt pads under all articles to prevent discoloration or softening of the lacquer. Plastic and rubber bases on items can discolor wood. Wipe up spills immediately and avoid common hazards such as hot dishes, harsh solvents and abrasives. Cleaning should be done with a soft lint free cotton cloth dampened with water or furniture polish. On highly used surfaces we recommend applying a quality paste wax which should be used on a regular basis to provide additional protection from scratches and spills. How often you apply the wax depends on how much wear the furniture receives.

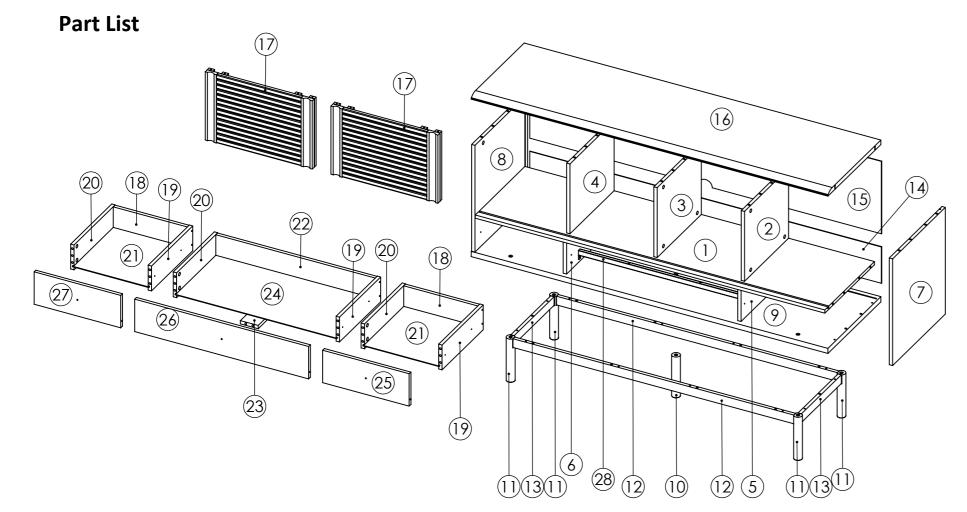



## Model#MED3105A

Product Dimensions: W 62.99" x D 17.71" x H 29.09"

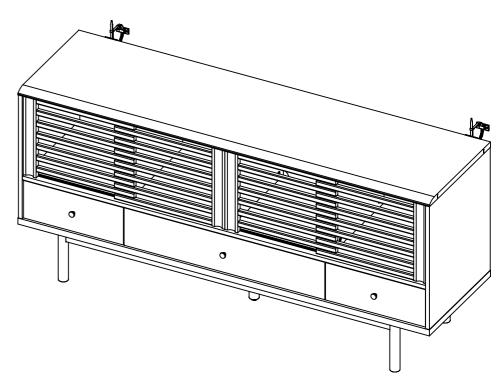



### WARNING

This product is intended for use with a
FLAT SCREEN TV ONLY
Maximum Screen Size: 75 inches
Weight Limit: 77 lbs
Shelf Load Limit: 16 lbs
Small Drawer Load Limit: 5 lbs
Big Drawer Load Limit: 12 lbs
Use with heavier televisions may result in instability causing tip over resulting in death or Serious injury.



#### WARNING

Death or serious injury may occur when children climb on audio and/or video equipment furniture. A remote control or toys placed on the furnishing may encourage a child to climb on the furnishing and as a result the furnishing may tip over on to the child

# **Hardware List**

HW1x37	HW2x37	HW3x56	HW4x20	HW5x15	HW6x4
Ø6x32MM	Ø15x12MM	Ø8x32MM		Ø7x32MM	Ø6x15MM
HW7x14	HW8x27	HW9x5	HW10x3	HW11x4	HW12x8
	Attitle)				
Ø4x19MM	Ø6x12MM	Ø6x40MM	Ø4x25MM	Ø10x50MM	Ø8MM
HW13x3	HW14x14	HW15x5	HW16x6	HW17x6	HW18x2
		6MM			
HW19x8	HW20x36	HW21x1	HW22x4	HW23x1	
Ø5x16MM	Ø20MM	1565MM		L4MM	

# Part List & HW


Piece	Description	Qty	Carton Call
1	Panel Fixed Shelf	1	2 of 2
2	Center Panel Upper - Right	1	1 of 2
3	Center Panel Upper	1	1 of 2
4	Center Panel Upper - Left	1	1 of 2
5	Center Panel Lower - Right	1	2 of 2
6	Center Panel Lower - Left	1	2 of 2
7	Right Side Panel	1	1 of 2
8	Left Side Panel	1	1 of 2
9	Bottom Panel	1	1 of 2
10	Center Leg	1	1 of 2
11	Leg	4	1 of 2
12	Plint Support - Front/Back	2	2 of 2
13	Plint Support - Side	2	2 of 2
14	Back Panel - Lower	1	2 of 2
15	Back Panel - Upper	1	2 of 2
16	Top Panel	1	2 of 2
17	Door	2	1 of 2
18	Drawer Back - Side	2	2 of 2
19	Right Side Drawer	3	1 of 2
20	Left Side Drawer	3	1 of 2
21	Drawer Base Side	2	2 of 2
22	Drawer Back Center	1	2 of 2
23	Drawer Base Support	1	1 of 2
24	Drawer Base Center	1	2 of 2
25	Front Drawer - Right	1	2 of 2
26	Front Drawer - Center	1	2 of 2
27	Front Drawer - Left	1	2 of 2
28	Metal Support	1	1 of 2

Piece	Description	Qty	Carton Call
HW1	Cambolt	37	1 of 2
HW2	Camlock Ø15x12 mm	37	1 of 2
HW3	Wooden Dowel Ø8	56	1 of 2
HW4	Screw M6 x 50 mm	20	1 of 2
HW5	Screw M7 x 32 mm	15	1 of 2
HW6	Screw M6 x 15 mm	4	1 of 2
HW7	Screw M4 x 19 mm	14	1 of 2
HW8	Screw M6 x 12 mm (PH)	27	1 of 2
HW9	JCBC Bolt M6 x 40 mm	5	1 of 2
HW10	Bolt M4 x 25 mm	3	1 of 2
HW11	Screw M10 x 50 mm	4	1 of 2
HW12	Dowel Track	8	1 of 2
HW13	Handle Drawer	3	1 of 2
HW14	Plastic Stopper	14	1 of 2
HW15	Washer	5	1 of 2
HW16	Metal Runner 1	6	1 of 2
HW17	Metal Runner 2	6	1 of 2
HW18	Anti-tip	2	1 of 2
HW19	Metal Pin	8	1 of 2
HW20	Cover Cap Sticker	36	1 of 2
HW21	List "H"	1	1 of 2
HW22	Fisher "S" 8	4	1 of 2
HW23	Allen Key	1	1 of 2


## **PREPARATION**

Before beginning assembly of product, make sure all part are present. Compare part with part contents list and hardware contents list.


If any part is missing or damaged, do not attempt to assemble the product. Estimated Assembly Time: 60 minutes.

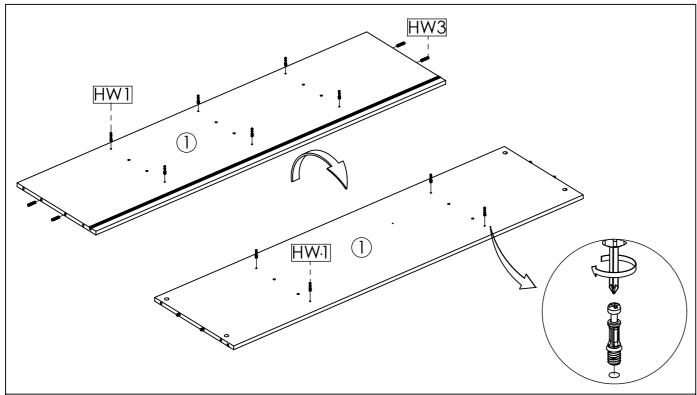


STEP1: Insert Cambolt (HW1) And Wooden Dowel (HW3) Into Panel Fixed Shelf (1)

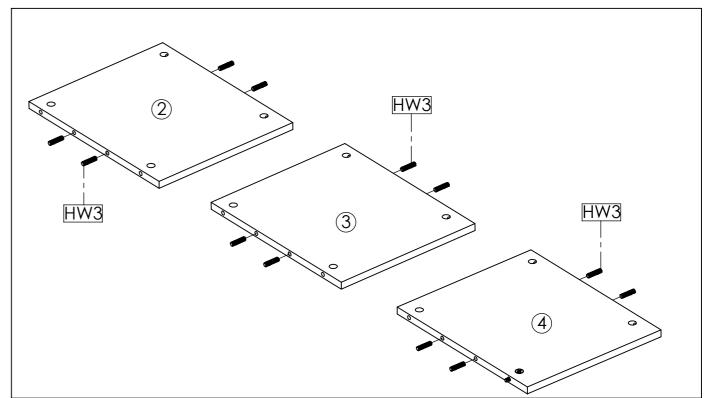


STEP2: Insert Wooden Dowel (HW3) Into Center Panel Upper - Right (2), Center Panel Upper (3) And Center Panel Upper - Left (4).

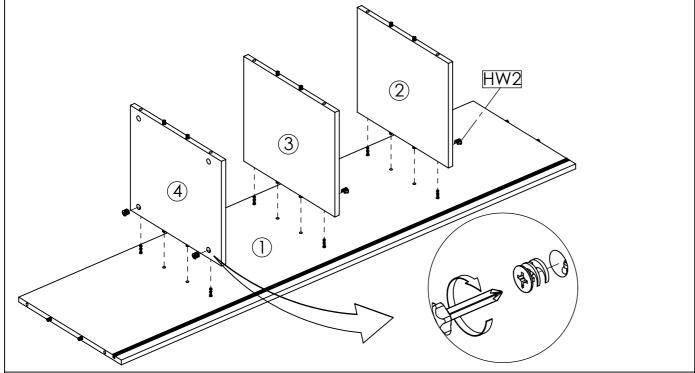


**STEP3:** Attach Center Panel Upper - Right (2), Center Panel Upper (3) And Center Panel Upper - Left (4) Into Panel Fixed Shelf (1), Secure with Camlock (HW2) tighten it using screwdriver.

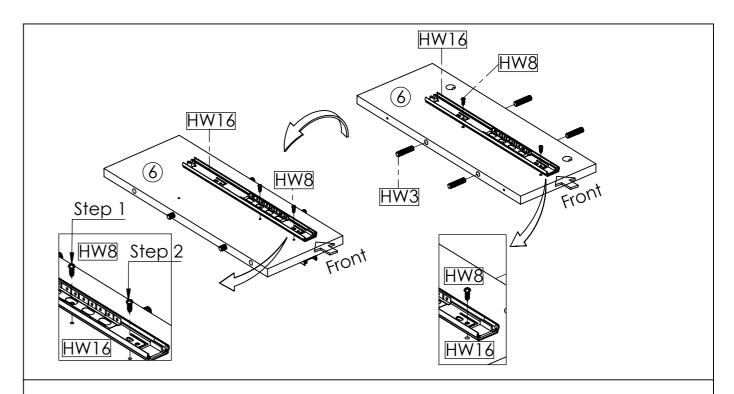


**STEP4:** Insert Wooden Dowel (HW3) Into Center Panel Lower-Left (6). Continue with securing part of the metal runner 1 (HW16) into position as the above image, using Screw M 6 x 12 mm PH (HW8) And tighten it using screwdriver.

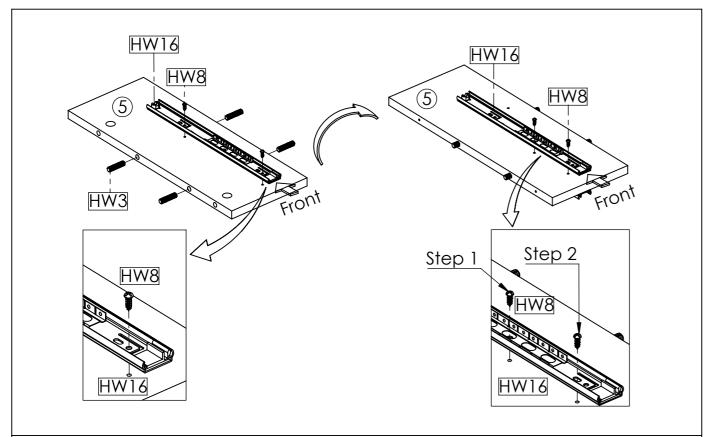


STEP5: Insert Wooden Dowel (HW3) Into Center Panel Lower - Right (5). Continue with securing part of the metal runner 1 (HW16) into position as the above image, using Screw M 6 x 12 mm PH (HW8) And tighten it using screwdriver.

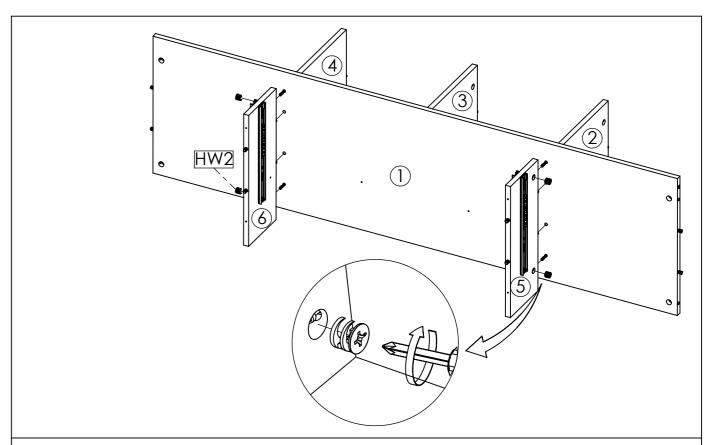


**STEP6:** Attach Center Panel Lower - Right (5) And Center Panel Lower - Left (6)Into Panel Fixed Shelf (1), Secure with Camlock (HW2) Tighten It Using Screwdriver.

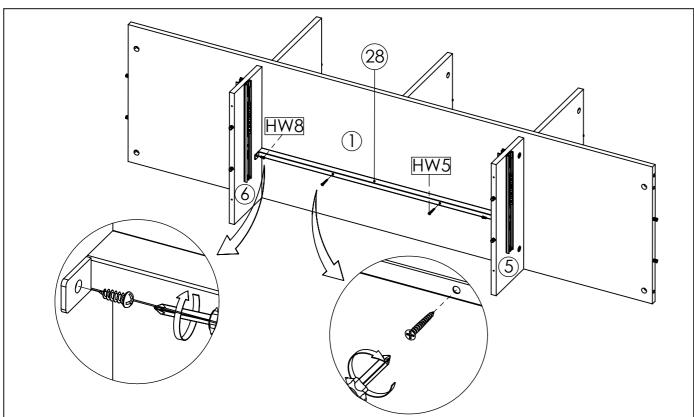


**STEP7:** Attach Metal Support (28) Into Panel Fixed Shelf (1), Secure with Screw M7 x 32 mm (HW5). And Scure With Screw M6 x 12 mm PH (HW8) Into Center Panel Lower - Right (5) And Center Panel Lower - Left (6) Tighten It Using Screwdriver.

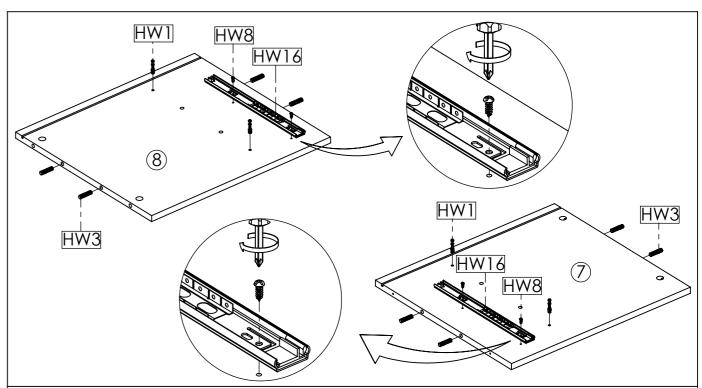


**STEP8:** Insert Cambolt (HW1) And Wooden Dowel (HW3) Into Right Side Panel (7). Continue with securing part of the metal runner 1 (HW16) into position as the above image, using Screw M 6 x 12 mm PH (HW8) And tighten it using screwdriver. - Insert Cambolt (HW1) And Wooden Dowel (HW3) Into Left Side Panel (8). Continue with securing part of the metal runner 1 (HW16) into position as the above image, using Screw M 6 x 12 mm PH (HW8) And tighten it using screwdriver.

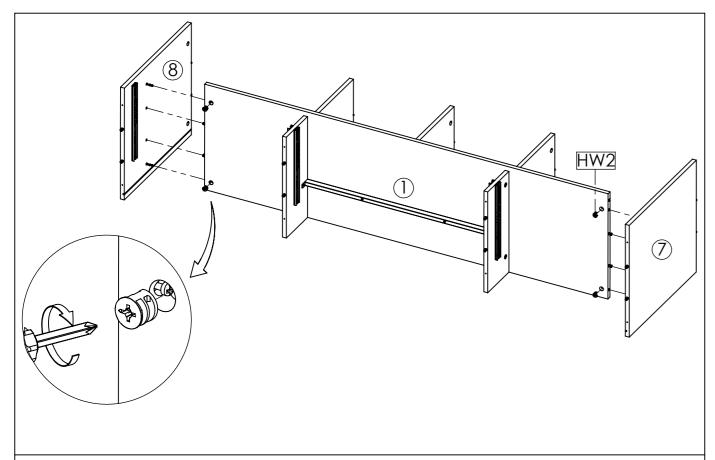


**STEP9:** Insert Right Side Panel (7) And Left Side Panel (8) Into Panel Fixed Shelf (1), Secure with Camlock (HW2) Tighten It Using Screwdriver.

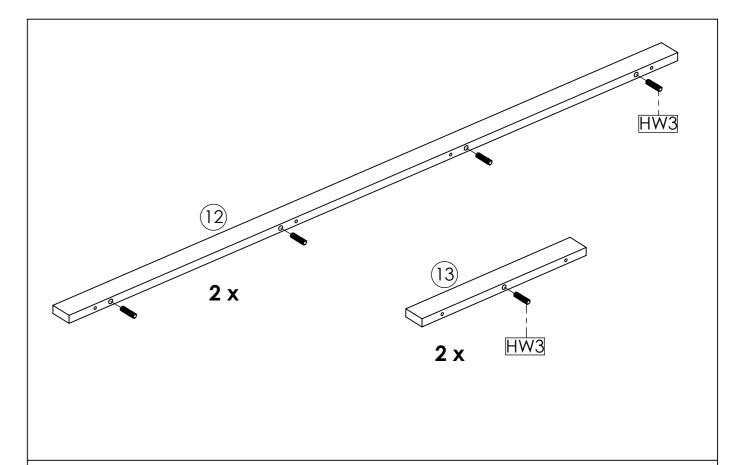


STEP 10: Insert Wooden Dowel (HW3) Into Plint Support - Front/Back (12) And Plint Support - Side (13).

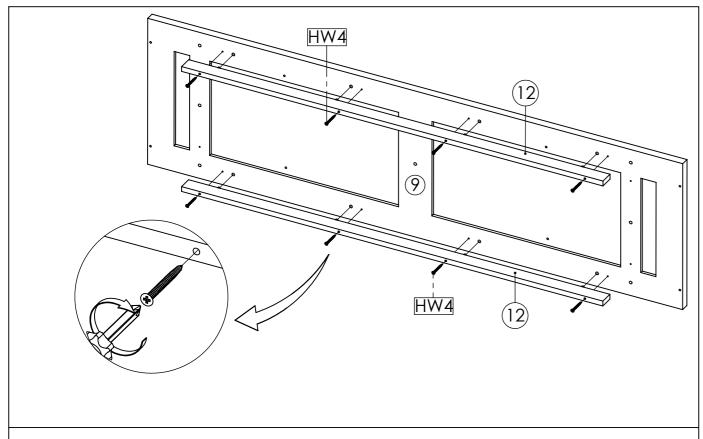


**STEP11:** Insert Plint Support - Front/Back (12) Into Bottom Panel (9) Secure with Screw M6 x 50 mm (HW4) Tighten It Using Screwdriver.

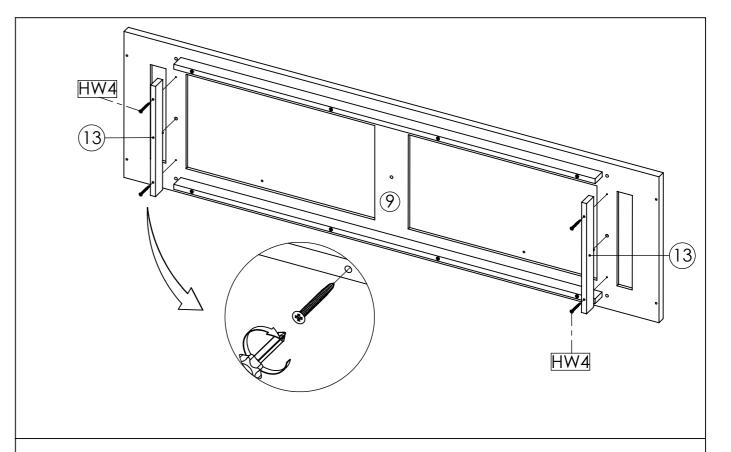


**STEP12:** Insert Plint Support - Side (13) Into Bottom Panel (9) Secure with Screw M6 x 50 mm (HW4) Tighten It Using Screwdriver.

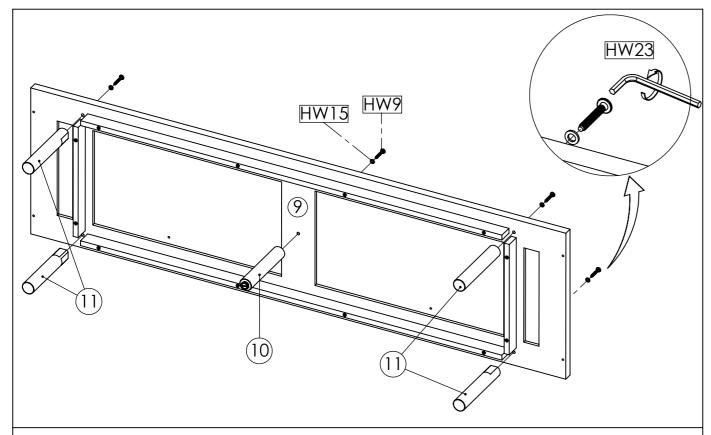



**STEP13:** Insert Center Leg (10) And Leg (11) Into Bottom Panel (9) Secure with Washer (HW15) And JCBC Bolt M6 x 40 mm (HW9) Tighten It Using Allen Key (HW23).

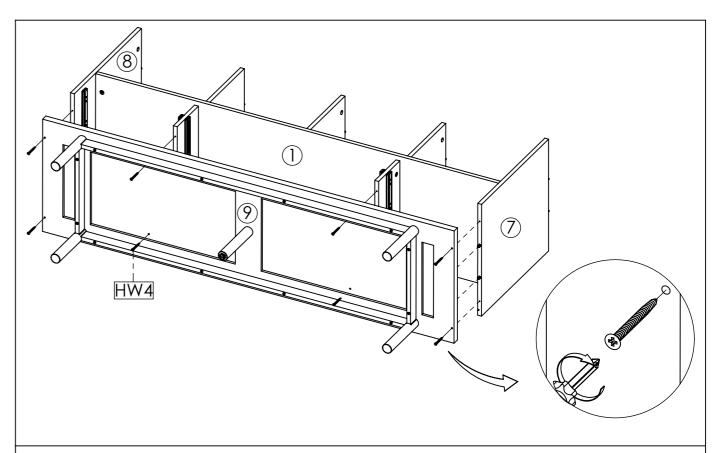


STEP14: Insert Bottom Panel (9) Secure with Screw M6 x 50 mm (HW4) Tighten It Using Screwdriver.

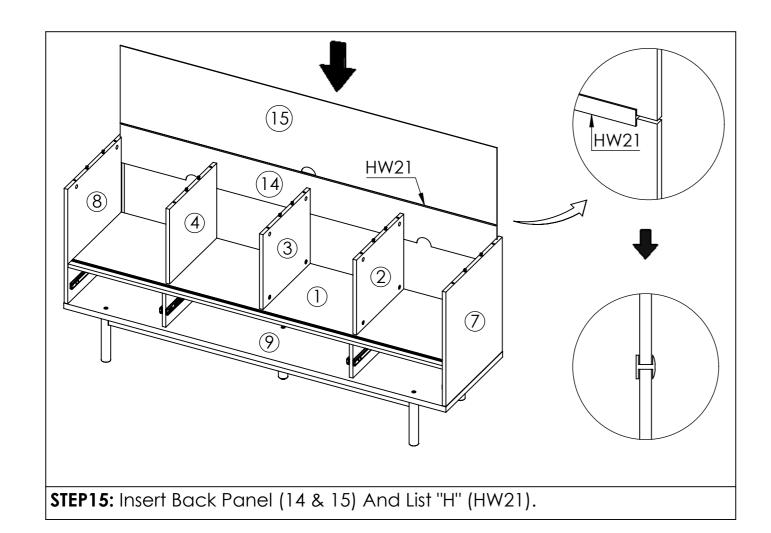

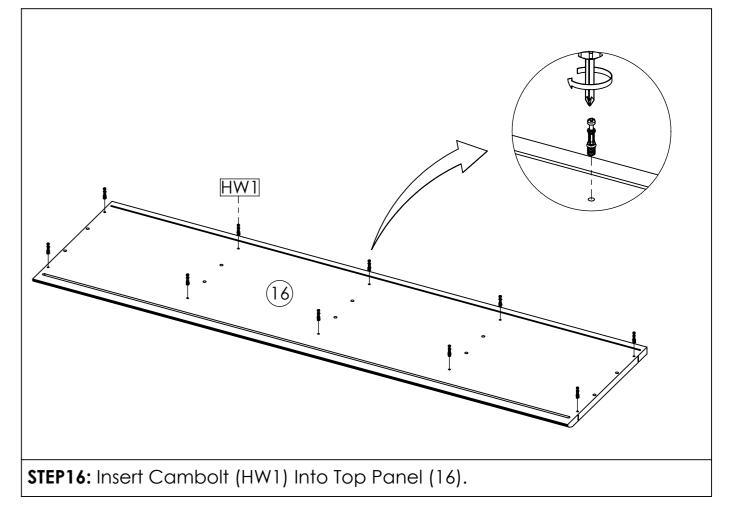


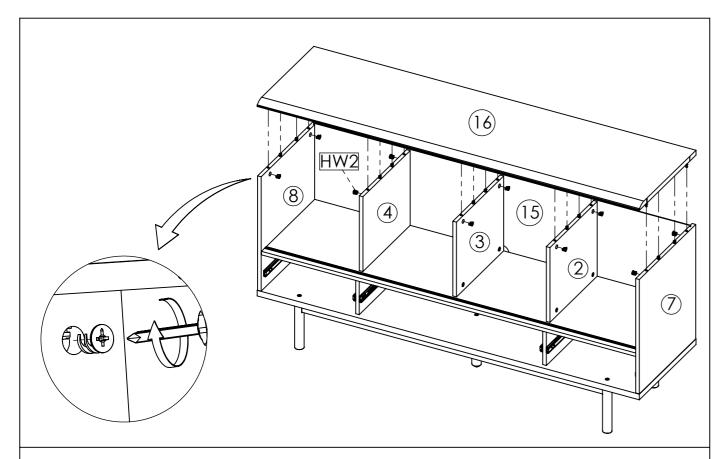


**STEP17:** Insert Top Panel (16) Secure with Camlock (HW2) Tighten It Using Screwdriver.

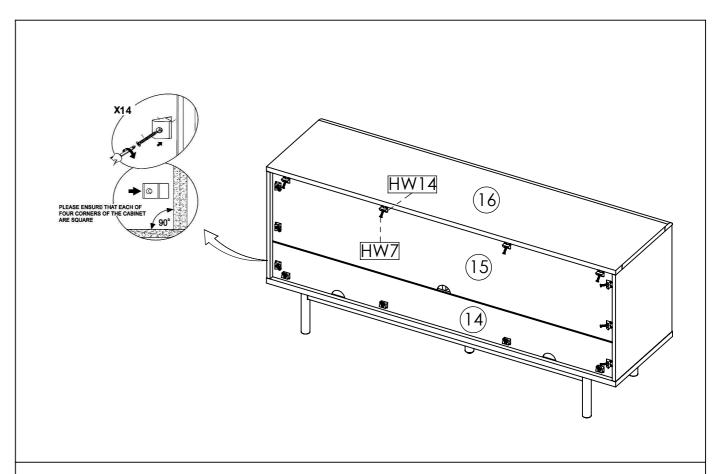


**STEP18:** Please ensure that each of four corners of the cabinet are square.

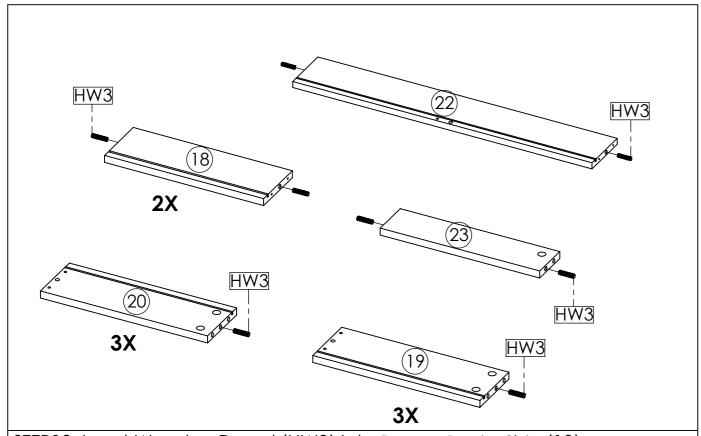


STEP19: Insert Wooden Dowel (HW3) Into Drawer Back - Side (18), Right Side Drawer (19), Left Side Drawer (20), Drawer Base - Center (22) And Drawer Base Support (23)

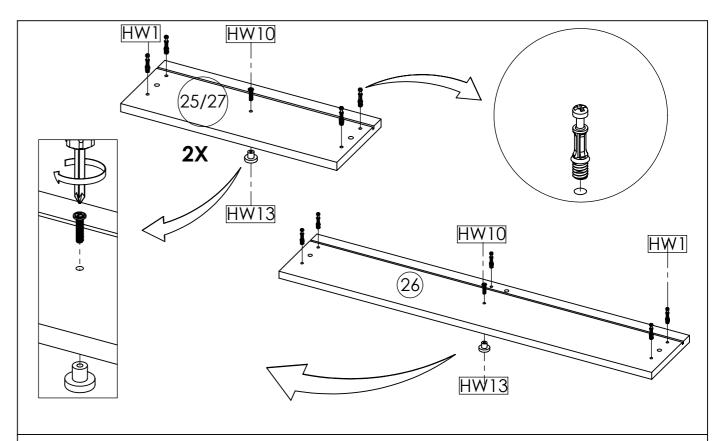


**STEP20:** Insert Cambolt (HW1) And Handle Drawer (HW13) Into Front Drawer - Right (25), Front Drawer - Left (27) And Front Drawer - Center (26) Scure With Screw Bolt M4 x 25 mm (HW10) Tighten It Using Screwdriver.

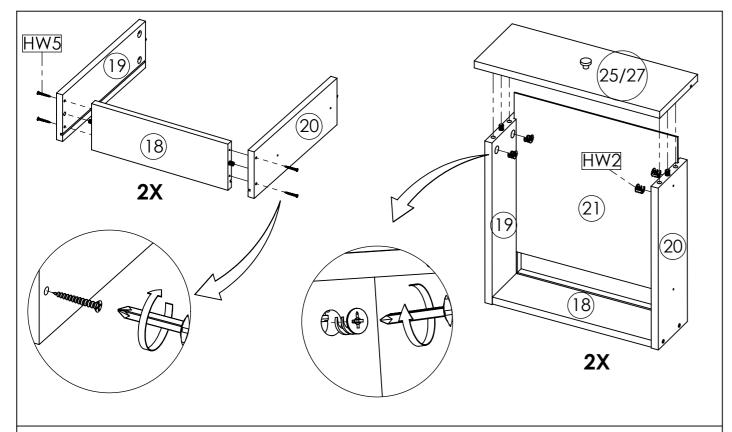


**STEP21:** Combine Side Drawers (19 & 20) Into Drawer Back - Side (18) Secure With Screw M7x32mm (HW5). Continue Insert Drawer Base - Side (21), Then Put Front Drawer Side(25/27) Then Tighten Camlock(HW2) It Using Screwdriver.

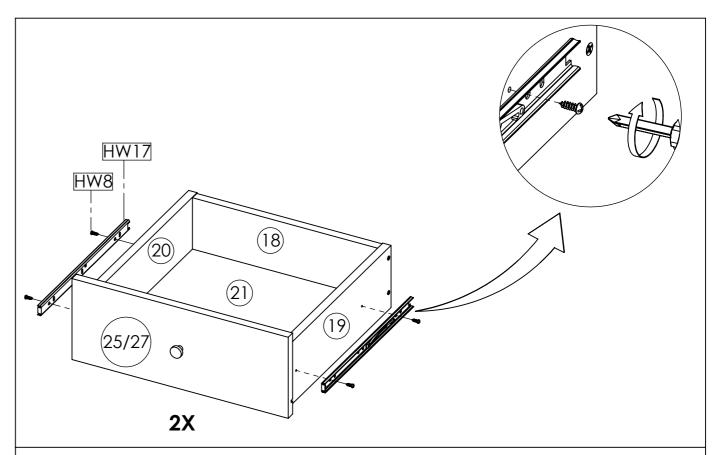


**STEP22:** Install The Metal Runner 2 (HW17) Into Position As Shown In Picture. Secure With Screw M 6 x 12 mm PH (HW8) And Tighten It Using Screwdriver.

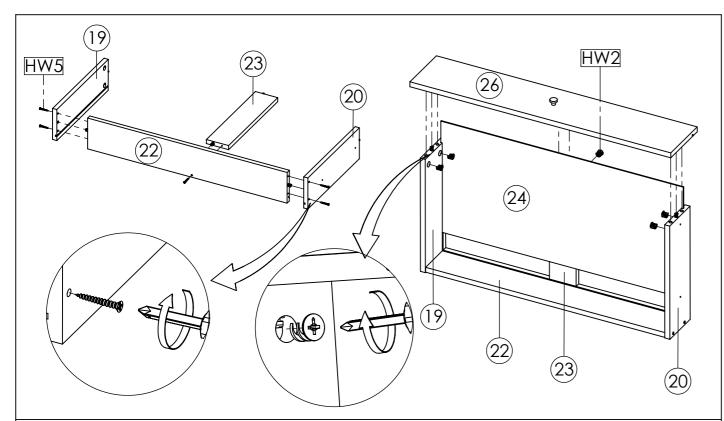


STEP23: Combine Side Drawers (19 & 20) And Drawer Base Support (23) Into Drawer Bake - Center (22) secure with screw M7x32mm (HW5). Continue Insert Drawer Base - Center (24), Then Put Front Drawer - Center (26) Then Tighten Camlock (HW2) It Using Screwdriver.

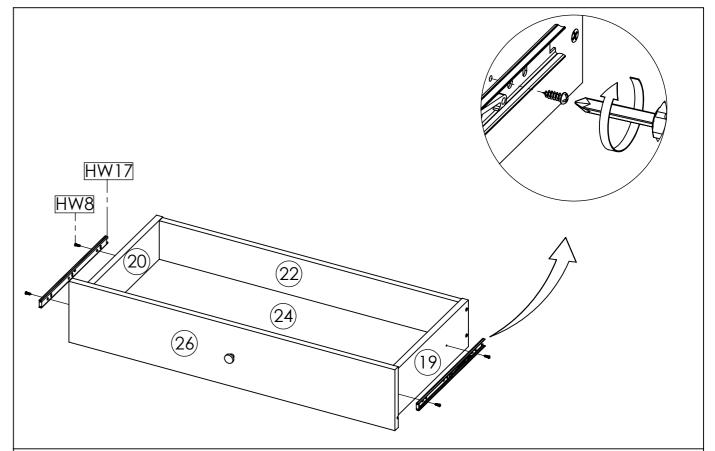


**STEP24:** Install The Metal Runner 2 (HW17) Into Position As Shown In Picture. Secure With Screw M 6 x 12 mm PH (HW8) And Tighten It Using Screwdriver.

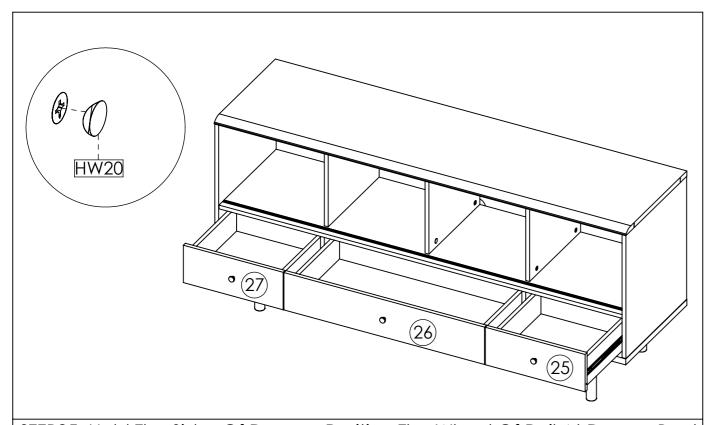


STEP25: Hold The Sides Of Drawer, Position The Wheel Of Rail At Drawer Back And The Wheel Of Rail At Side Boards, According To The Image. Slide In The Drawers One By One Into The Cabinet. Attach Cover Cap Sticker (HW20) To The Panel That Has Lamination.

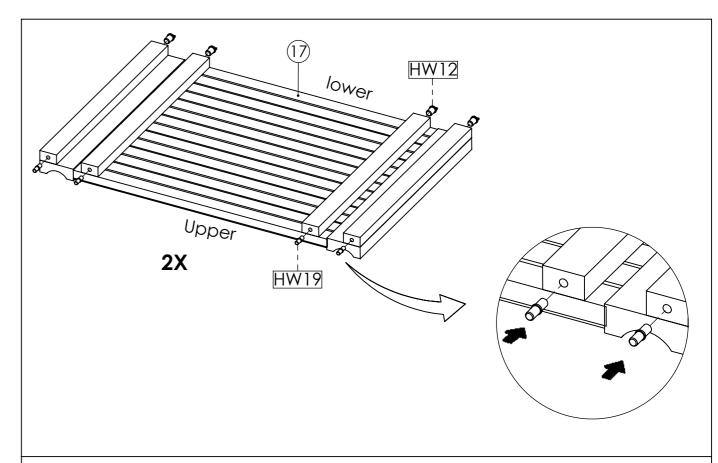

**STEP26:** Insert Metal Pin (HW19) Into Door Panel (17) Has Upper. Insert Dowel Track (HW12) Into Door Panel (17) Has Lower.

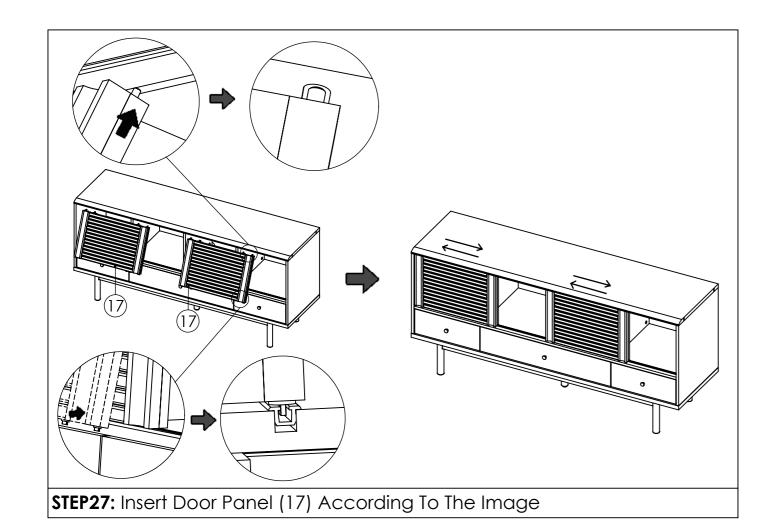

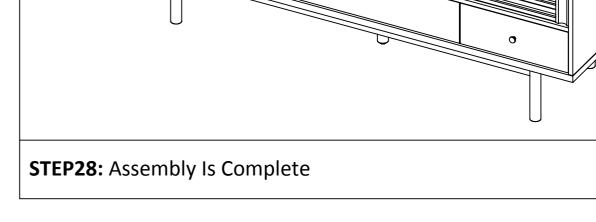



## ANTI-TIP RESTRAINT INSTALLATION




#### **WARNING!**

Children have died from furniture tipover. To reduce the risk of furniture tipover:

- ALWAYS install tipover restraint provided.
- NEVER allow children to stand, climb or hang on drawers, doors, or shelves.
- NEVER open more than one drawer at a time.
- Place heaviest items in the lower drawers.






REQUIRED TOOL 8MM / 5/16" DRILL BIT

**REQUIRED TOOL** 


Hardware (HW22/HW11) to attach brackets to wall is designed for drywall. To attach this unit to another type of wall, consult with your local hardware store.

ANTI-TIP RESTRAINT PACK					
ID	DESCRIPTION		QTY		
HW18	BRACKET		4		
HW6	M6 × 15MM SCREW	Dinn	4		
HW22	M8 × 35MM PLUG		4		
HW11	M10 × 50MM SCREW	danna (	4		
HW18	STRAP		2		

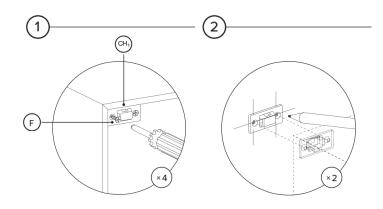



Attach pair of brackets to "Top Panel" of the unit. Note there are no existing pilot holes on the product.

Mark on wall where second pair of brackets should be placed.



Drill holes in wall using 8mm / 5/16" drill bit.



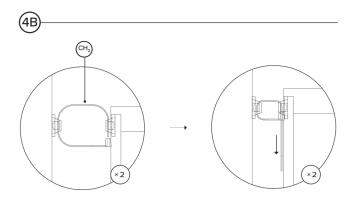

Pull strap down until it snap-locks.