

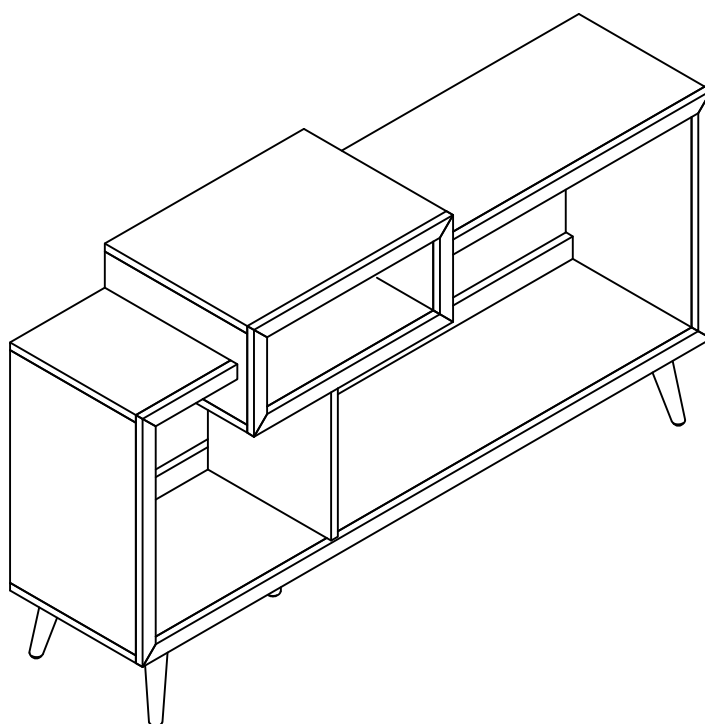















CROSLEY
FURNITURE









Large Record Storage Console
CF1166



PARTS LIST


<div data-bbox="124 185 156 226">A</div> 	<div data-bbox="400 185 432 226">B</div> 	<div data-bbox="676 185 708 226">C</div> 	<div data-bbox="952 185 984 226">D</div> 	<div data-bbox="1228 185 1260 226">E</div> 
Middle Top Panel 1 PC	Middle Left Panel 1 PC	Middle Right Panel 1 PC	Middle Bottom Panel 1 PC	Left Top Panel 1 PC
<div data-bbox="124 530 156 571">F</div> 	<div data-bbox="400 530 432 571">G</div> 	<div data-bbox="676 530 708 571">H</div> 	<div data-bbox="952 530 984 571">I</div> 	<div data-bbox="1228 530 1260 571">J</div> 
Right Top Panel 1 PC	Left Panel 1 PC	Right Panel 1 PC	Partition Panel 1 PC	Bottom Panel 1 PC
<div data-bbox="124 875 156 916">K</div> 	<div data-bbox="400 875 432 916">L</div> 	<div data-bbox="676 875 708 916">M</div> 	<div data-bbox="952 875 984 916">N</div> 	<div data-bbox="1228 875 1260 916">O</div> 
Back Bottom Rail 1 PC	Leg 4 PCS	Support Leg 1 PC	Middle Front Frame 1 PC	Side Front Rail 2 PCS

HARDWARE LIST

#1  1/4"*45mm Long Bolt 4 PCS (Extra 1)	#2  Ø1/4"*25mm Short Bolt 14 PCS (Extra 1)	#3  1/4"*11mm Spring Washer 18 PCS (Extra 1)	#4  1/4"*13mm Flat Washer 18 PCS (Extra 1)	#5  7*38mm Tapping Bolt 16 PCS (Extra 1)
#6  8*30mm Wood Dowel 28 PCS (Extra 1)	#7  M4 Allen Wrench 1 PC	#8  Safety Strap Kit 1 SET		

ADDITIONAL TOOLS (Not Provided)


Note: It is not recommended to use power tools during assembly.




Phillips Head Screwdriver

Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.


Step 1. Attach legs (part L) to bottom panel (part J) using long bolts (part #1), spring washers (part #3), flat washers (part #4) and allen wrench (part #7). Attach support leg (part M) to bottom panel (part J).

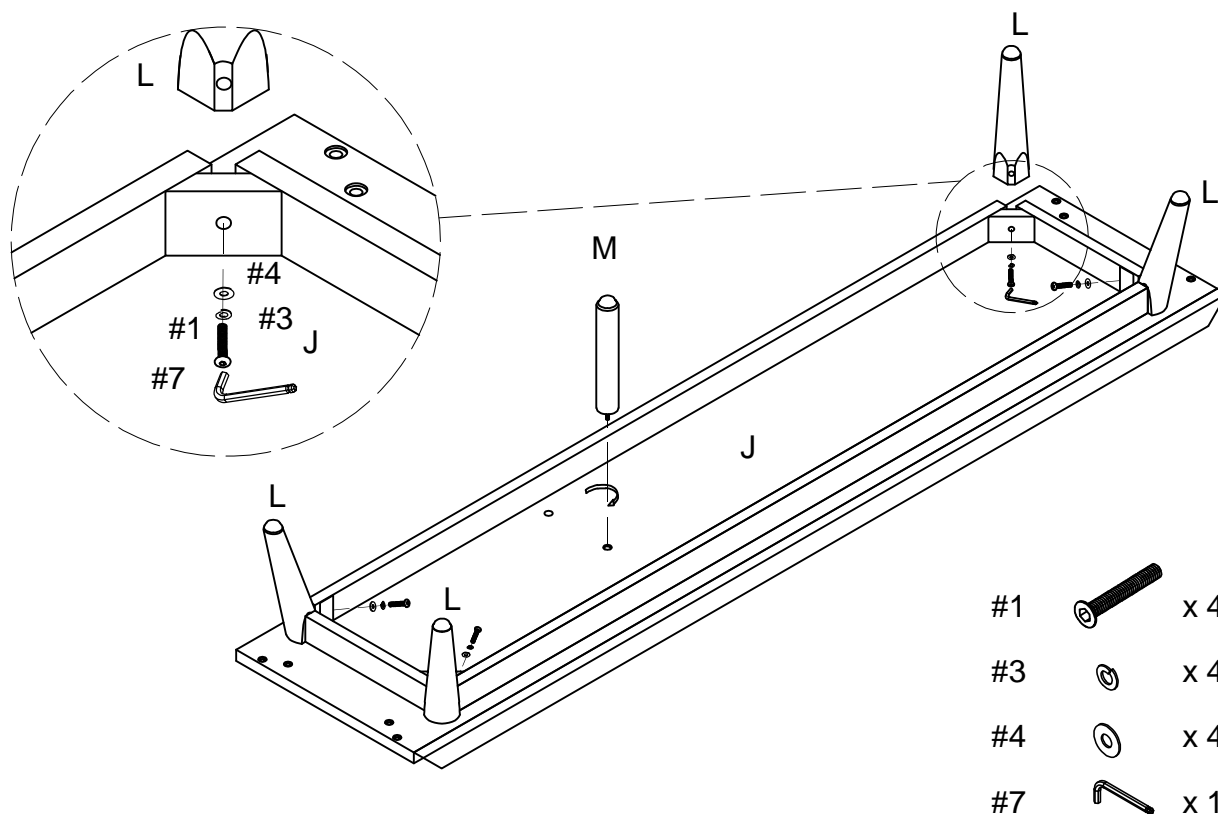


Step 2. Attach middle panels (parts B & C) to middle top panel (part A) using short bolts (part #2), spring washers (part #3), flat washers (part #4), wood dowels (part #6) and allen wrench (part #7).

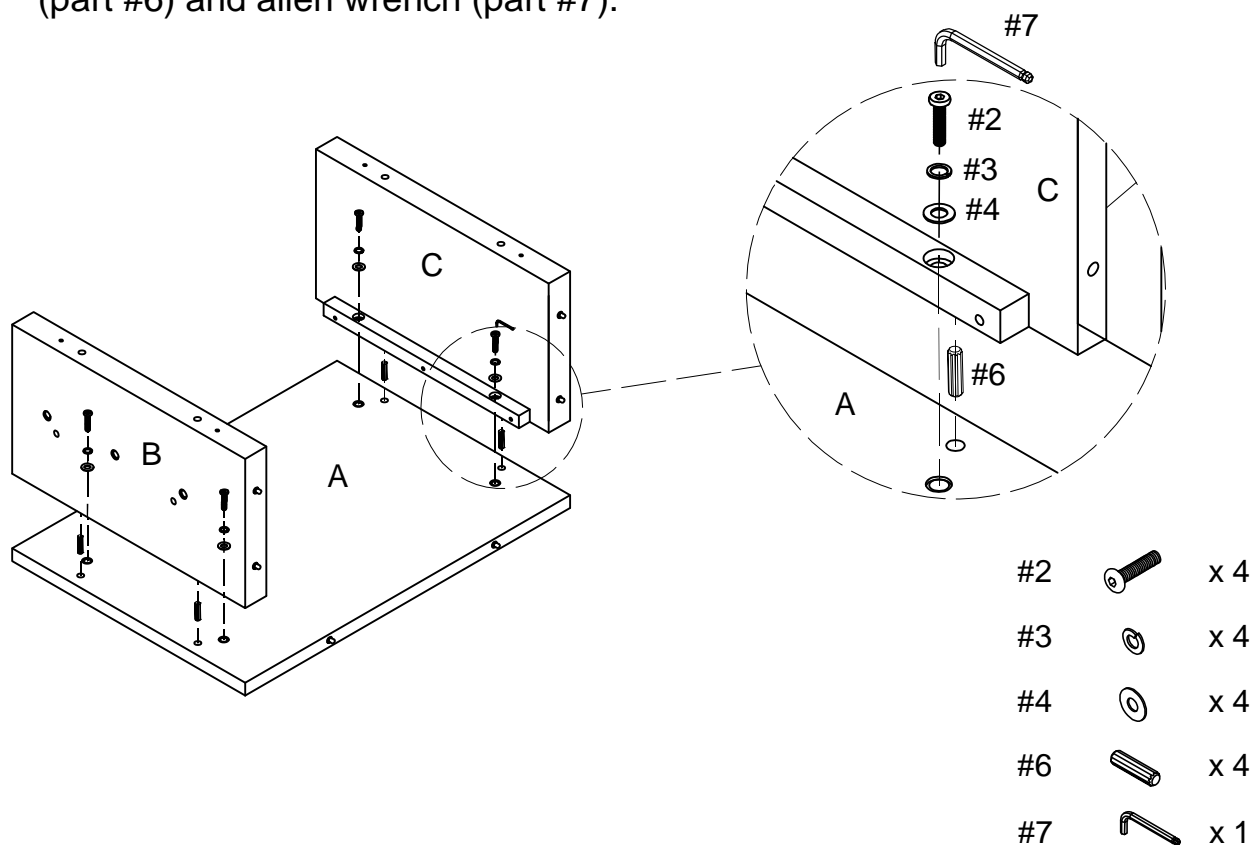


Step 3. Attach middle bottom panel (part D) to assembled unit (parts B & C) using tapping bolts (part #5), wood dowels (part #6) and allen wrench (part #7).

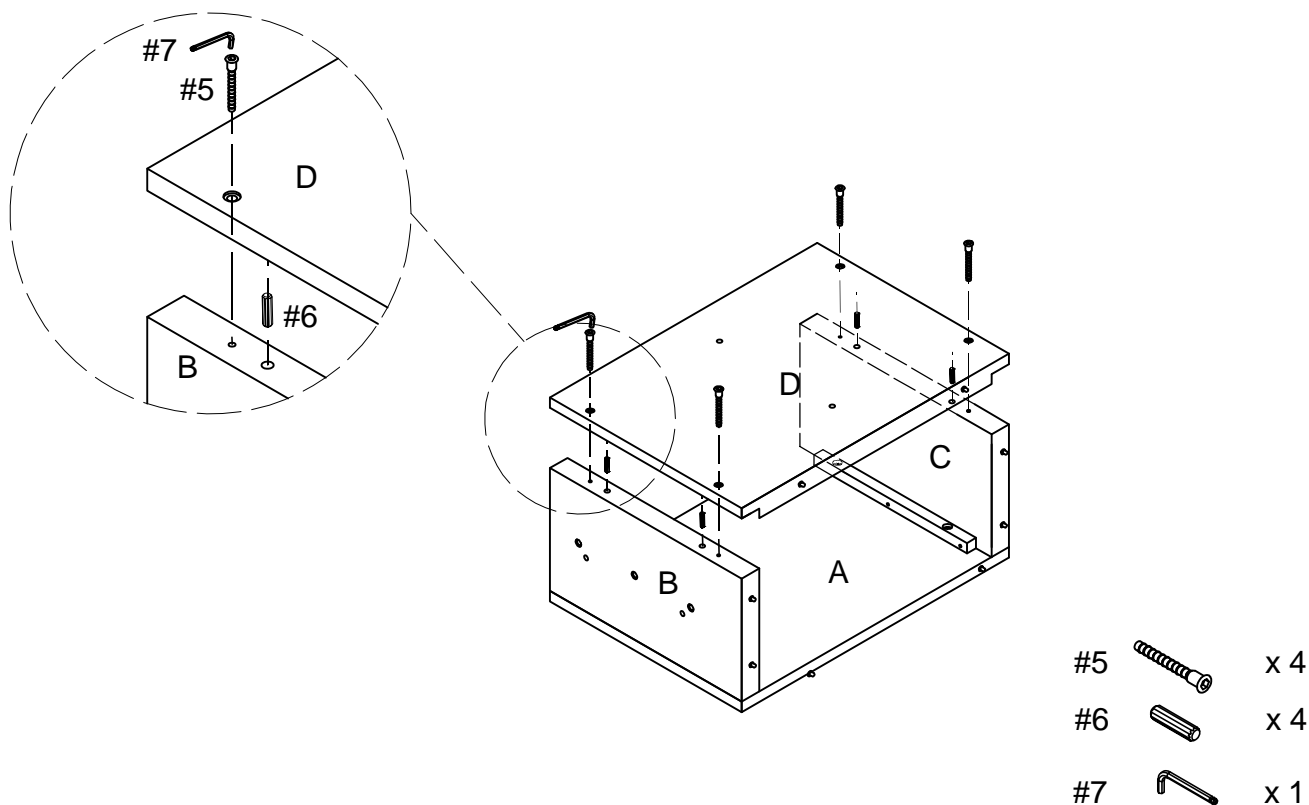


Step 4. Carefully turn assembled unit (parts A, B, C & D) by 90° to the other side. Attach middle front frame (part N) to pre-installed pins on assembled unit (parts A, B, C & D) using manual pressure as shown. Attach side front rails (part O) to pre-installed pins on panels (parts G & H) using manual pressure as shown.

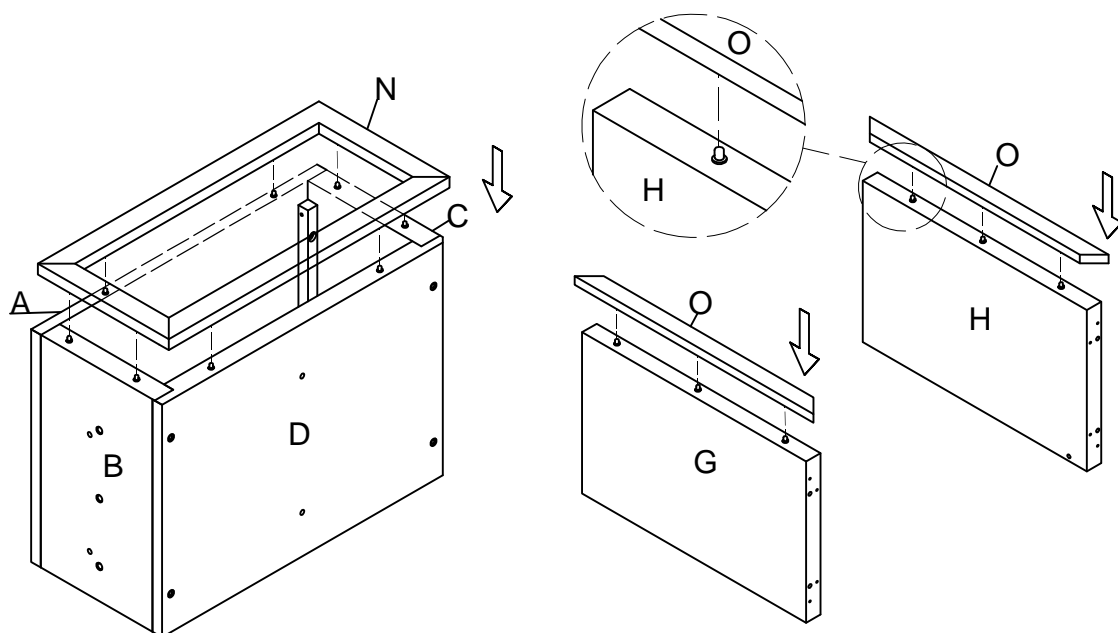


Step 5. Attach top panels (parts E & F) to assembled unit (parts B & C) using short bolts (part #2), spring washers (part #3), flat washers (part #4), wood dowels (part #6) and allen wrench (part #7).

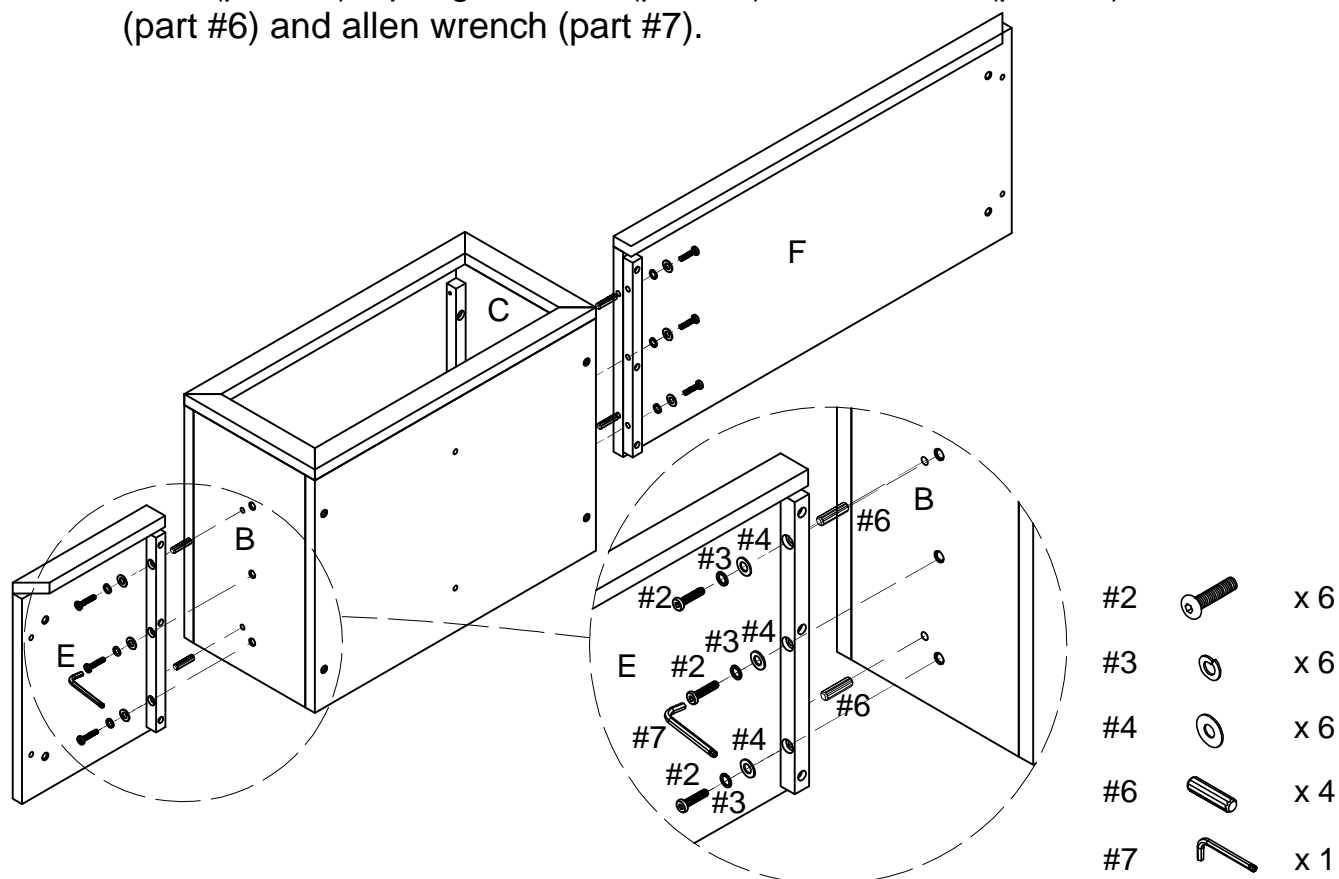


Step 6. Attach left panel (part G) to left top panel (part E) using short bolts (part #2), spring washers (part #3), flat washers (part #4), wood dowels (part #6) and allen wrench (part #7).

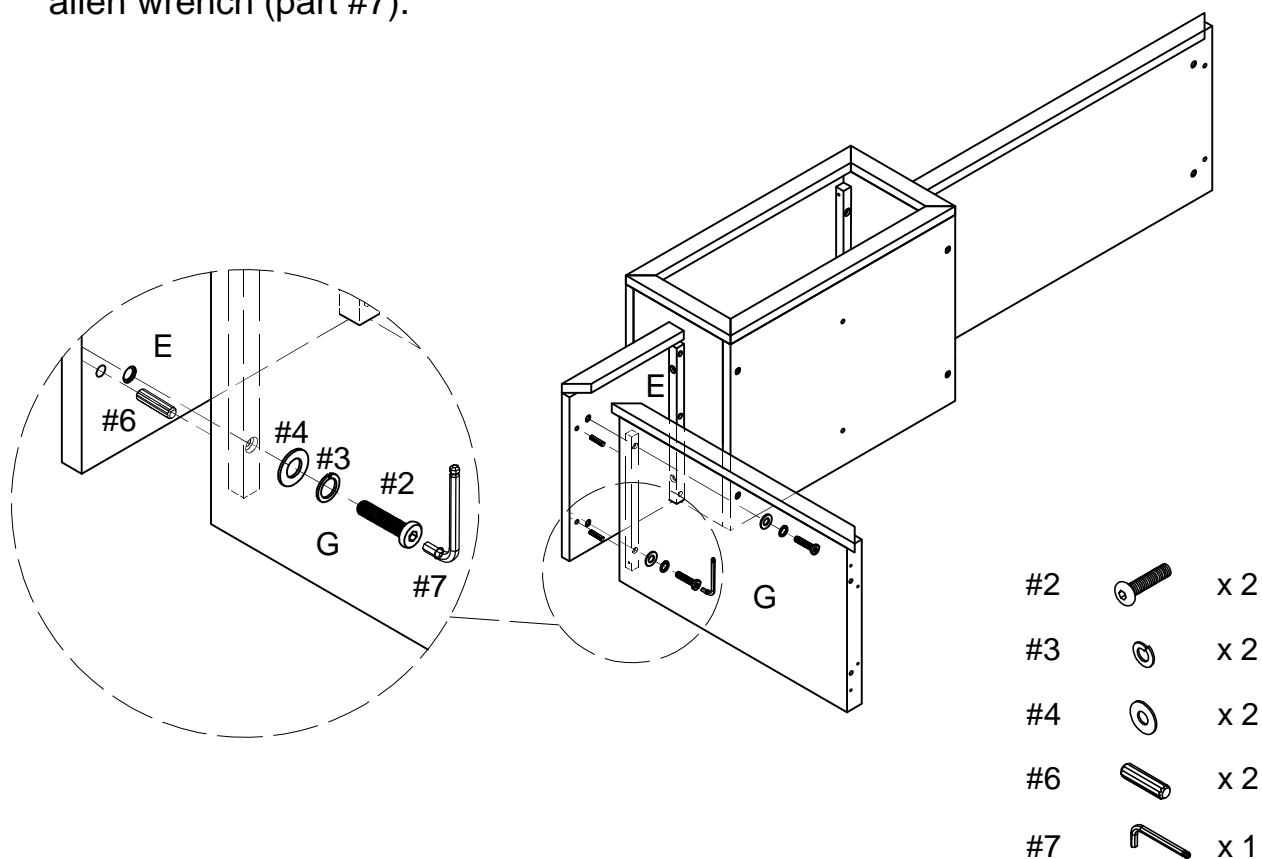


Step 7. Attach back bottom rail (part K) to left panel (part G) using wood dowel (part #6).

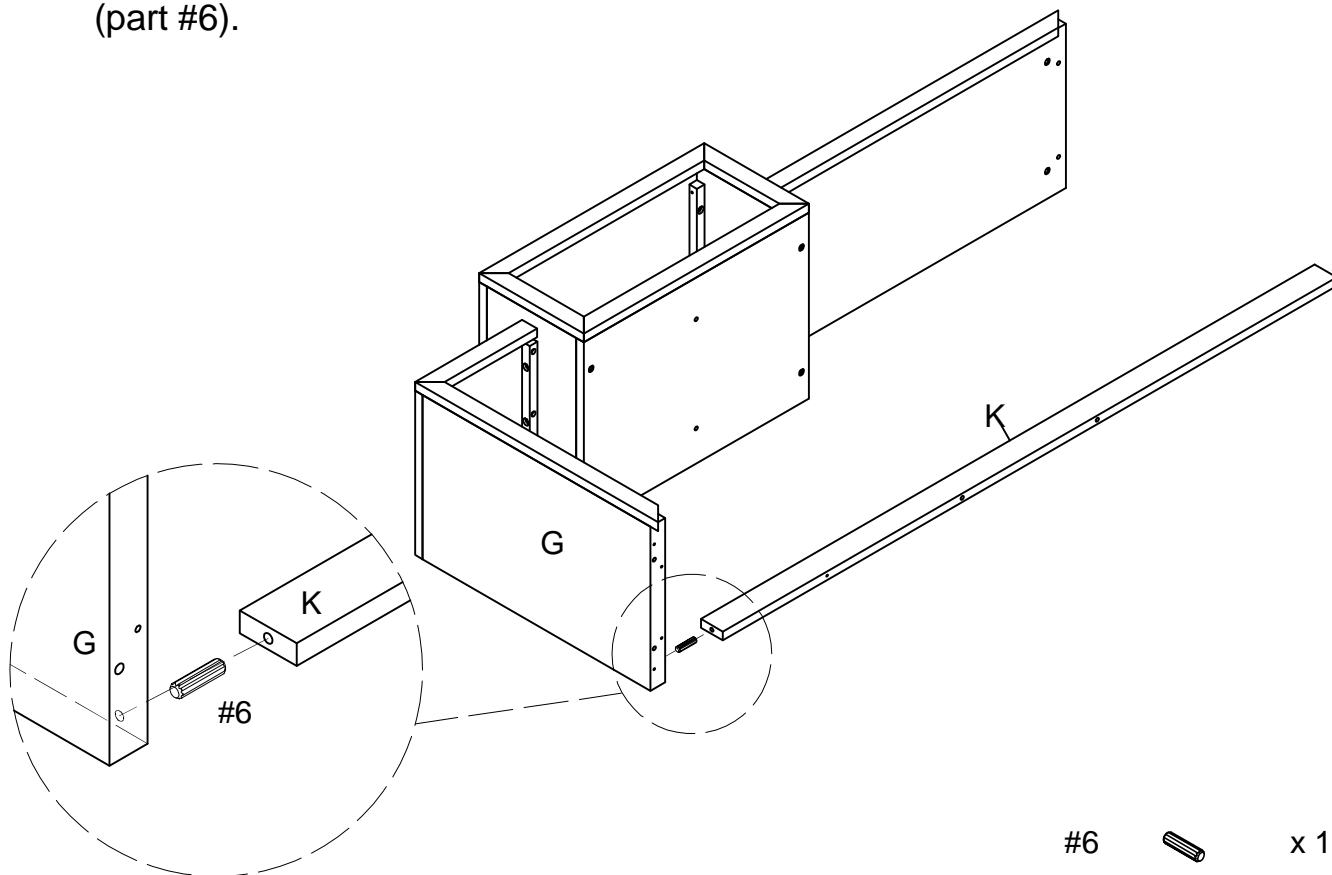

Step 8. Attach partition panel (part I) to middle bottom panel (part D) using wood dowels (part #6). Attach right panel (part H) to assembled unit (parts F & K) using short bolts (part 2), spring washers (part #3), flat washers (part #4), wood dowels (part #6) and allen wrench (part #7).

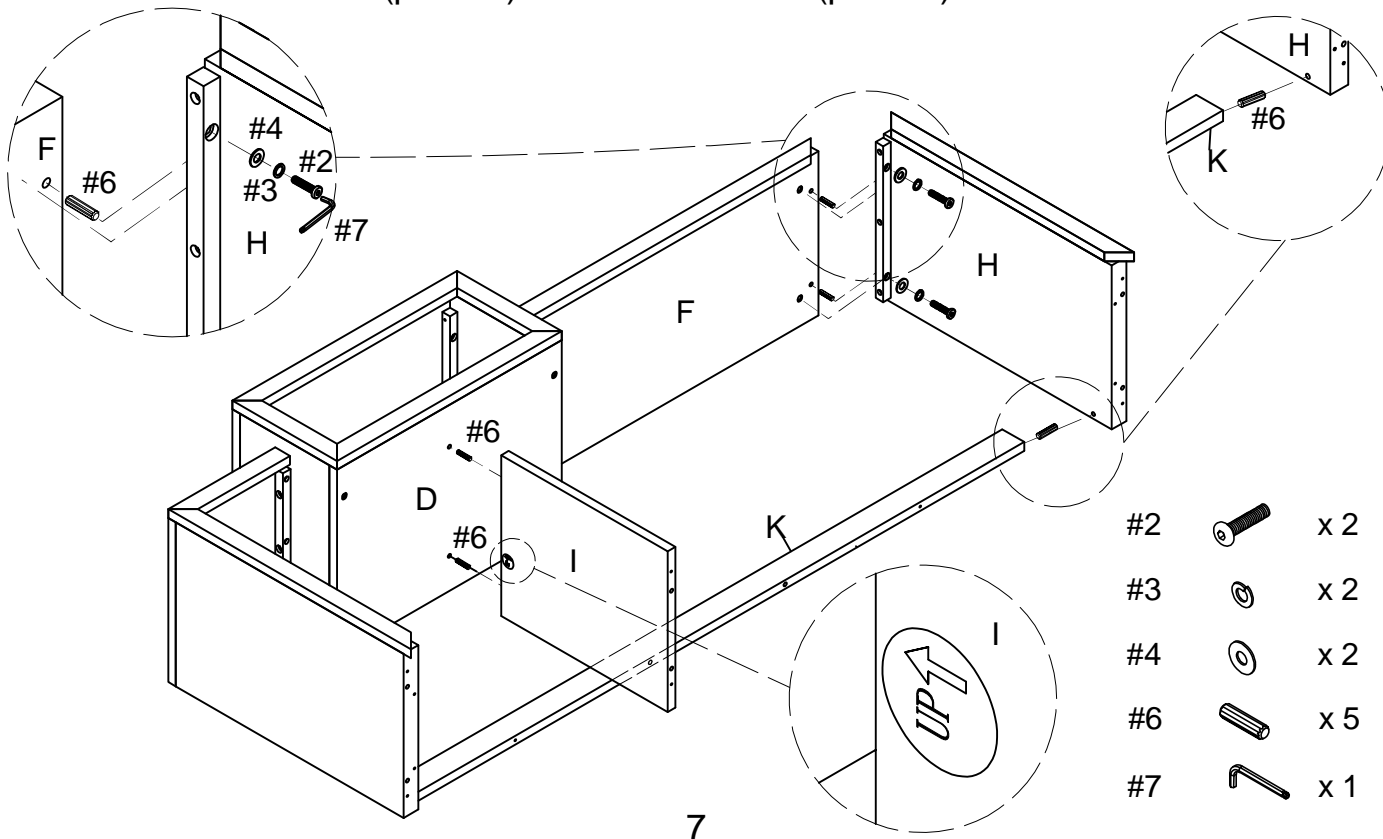


Step 9. Attach bottom panel (part J) to assembled unit (parts G, H, I & K) using tapping bolts (part #5), wood dowels (part #6) and allen wrench (part #7).

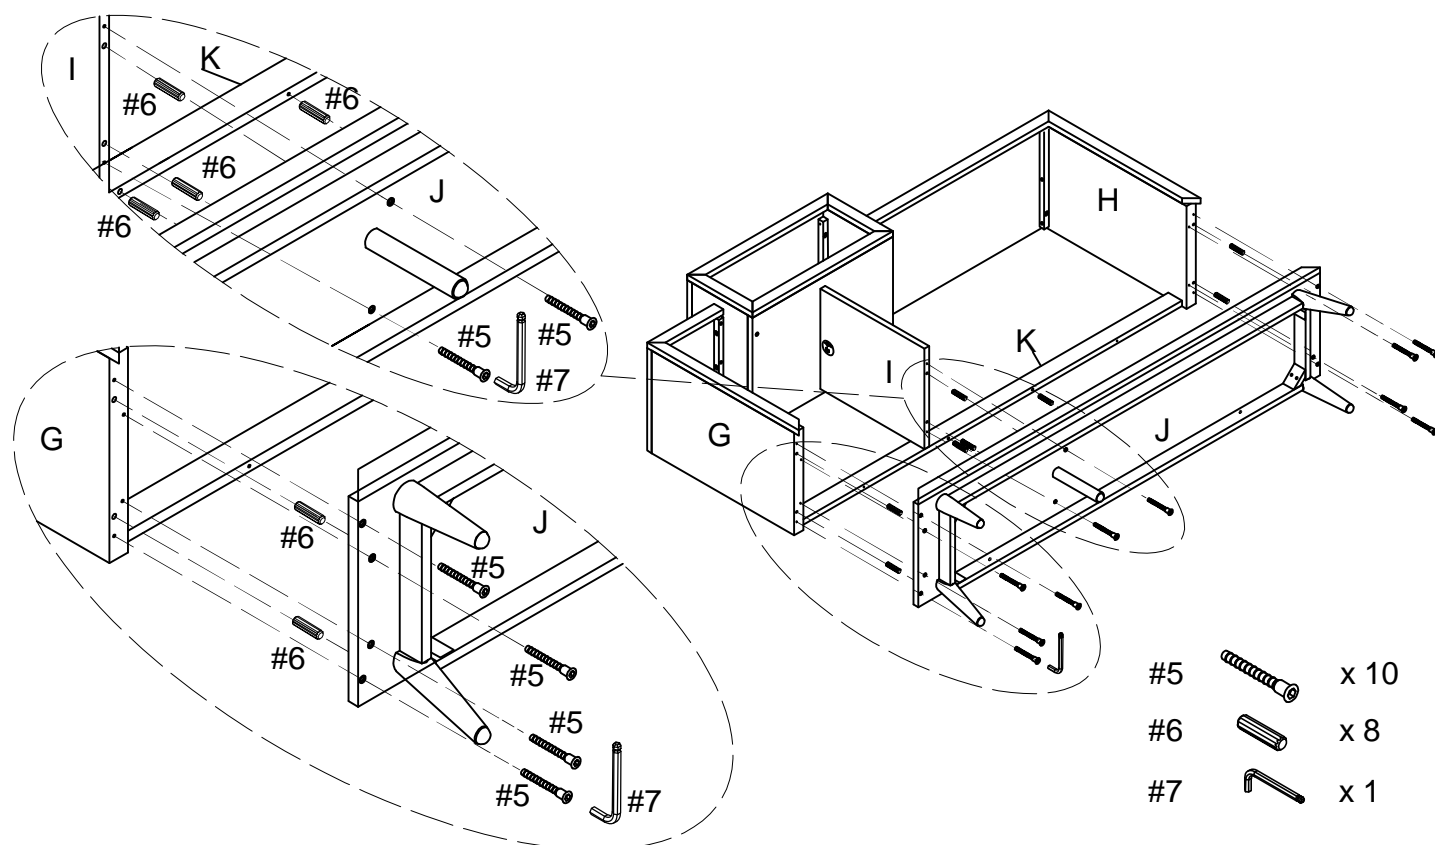

Step 10. Carefully turn to the other side.



Attach tapping bolts (part #5) to assembled unit (parts J & K) using allen wrench (part #7).

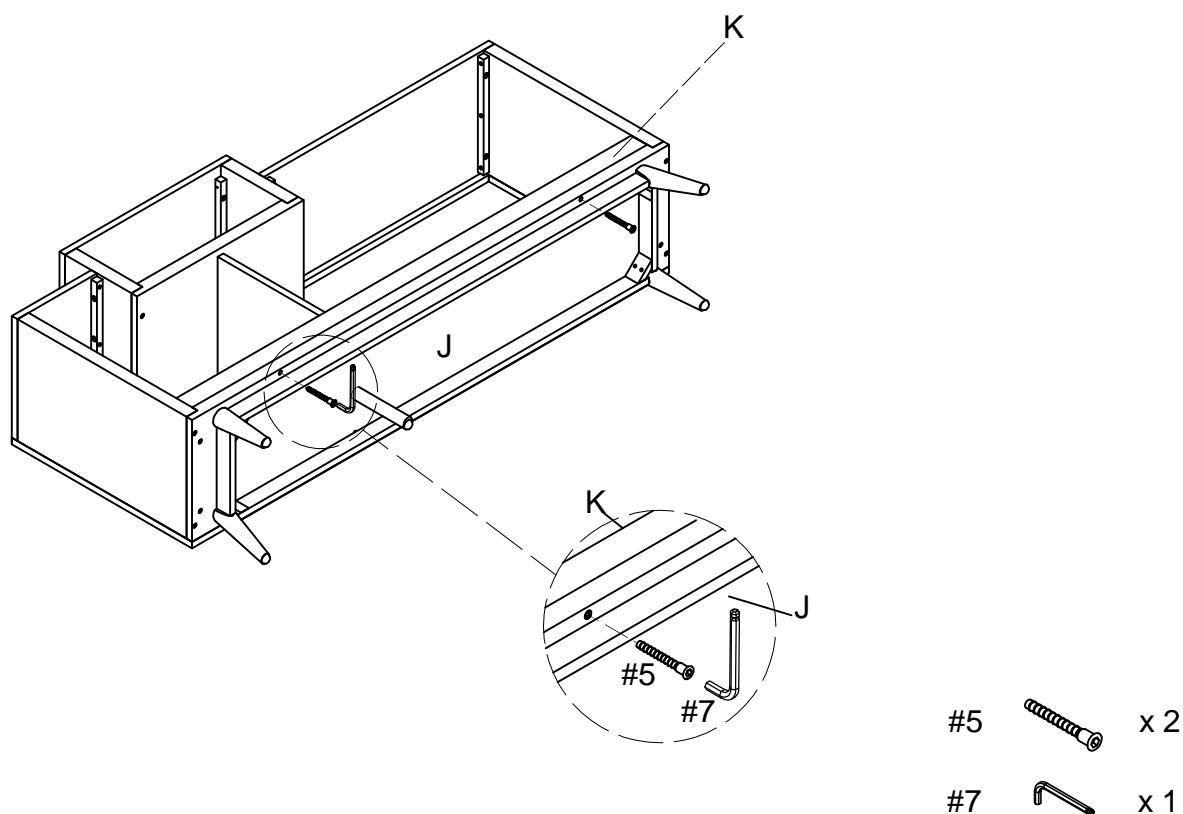







Step 11. Carefully turn unit upright.

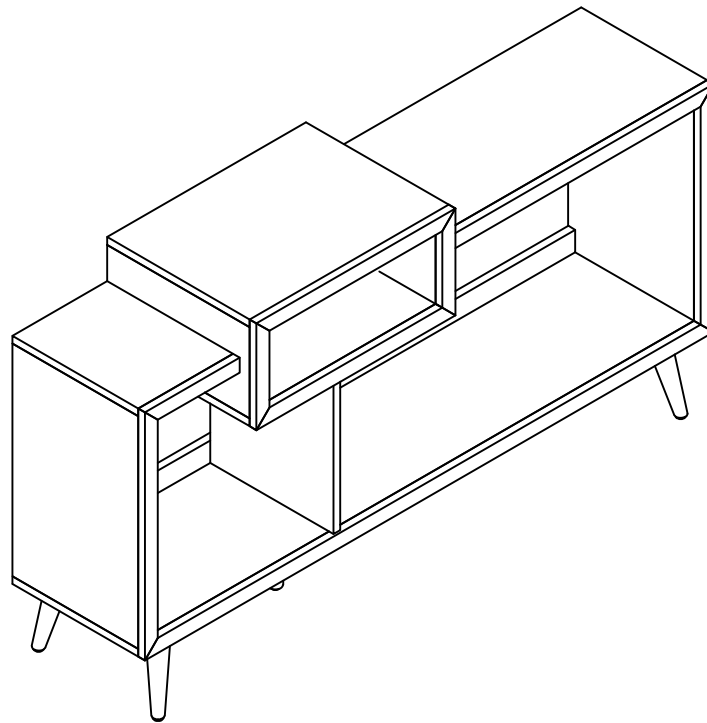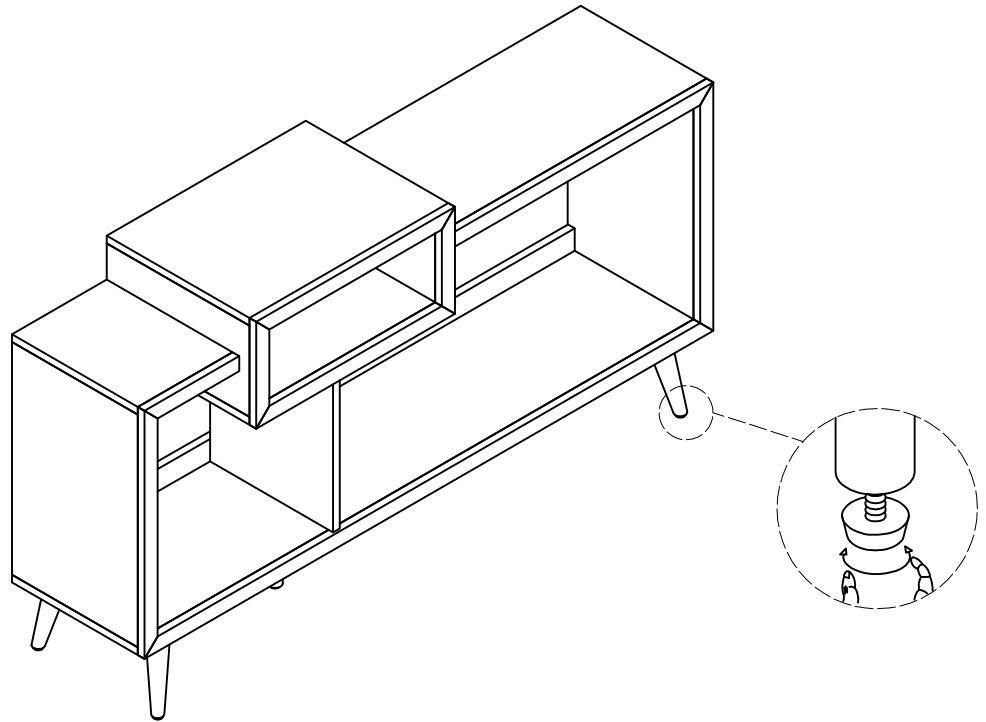NOTE: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor. If relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

Important: Safety strap kit (part #8) must be installed to prevent tipping damage and/or injury.




#8	A	B	C	D	E
			 8*3*15mm	 8*4*35mm	
Safety Strap Kit 1 SET	Wall Anchor 1 PC	Bracket 2 PCS	Short Screw 1 PC	Long Screw 1 PC	Safety Wall Strap 1 PC

SAFETY WALL STRAP INSTALLATION

Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

1. Insert short screw (C) and safety wall strap (E) through bracket (B) and attach to middle bottom panel (part D) using phillips head screwdriver.
2. Drill a 1 1/32" hole where you want to secure the unit. The drilled hole will be at the same height as the hole in middle bottom panel (part D) where bracket (B) is attached. Tap wall anchor (A) into the hole.
3. Insert long screw (D) and safety wall strap (E) through bracket (B) into wall anchor (A) using phillips head screwdriver.

Note: This item is not intended for clothing storage use.

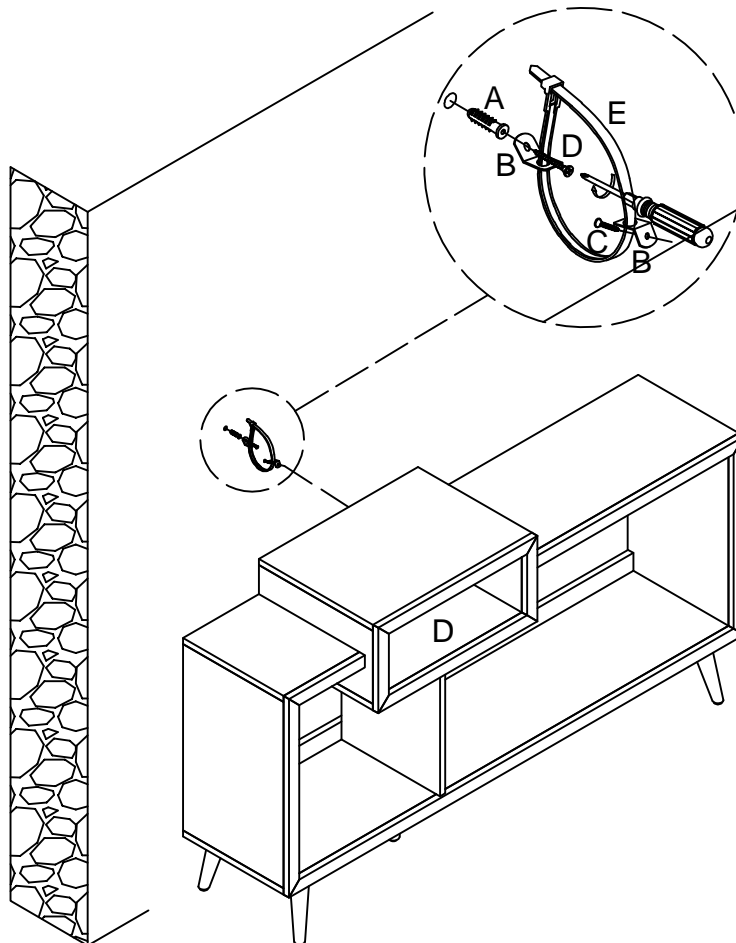

⚠ WARNING



Children have died from furniture tipover. To reduce the risk of furniture tipover:

- ALWAYS install tipover restraint provided.
- NEVER put a TV on this product.
- NEVER allow children to stand, climb or hang on drawers, doors, or shelves.
- NEVER open more than one drawer at a time.
- Place heaviest items in the lowest drawers.

*This is a permanent label.
Do not remove!*