




MODEL RTA-DSR06


ASSEMBLY INSTRUCTIONS

(REV.4-ALL-9325-1225)

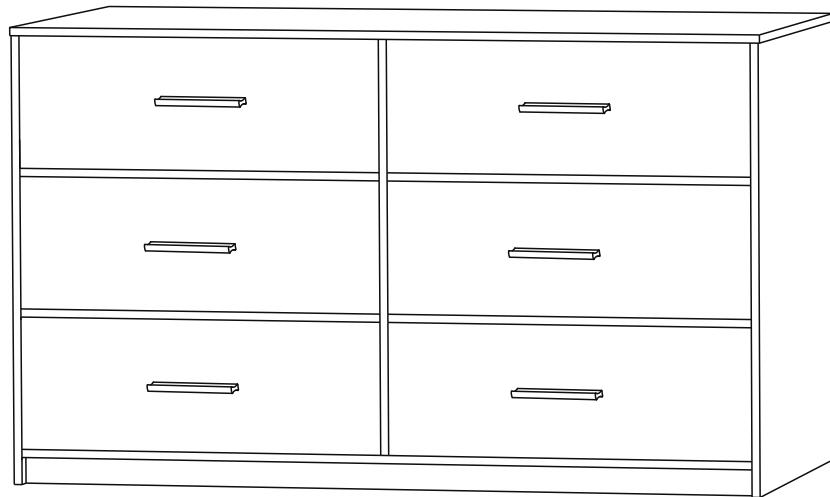


Thank you for purchasing our product!

View Assembly Video



Thank you for purchasing our product!

Ver el Manual en Español



Visit our Website









Contact Us




MAIN PARTS LIST

A Right side panel (Top) (Back) (Front) (Bottom)	B Left side panel (Top) (Front) (Back) (Bottom)	C Middle panel (Top) (Back) (Front)	D Back supports x4	E Middle supports x4
			F Bottom support (upper)	G Bottom support (lower)
J Bottom base (upper)	L Top panel		H Left supports x3	I Right supports x3
K Bottom base (lower)				
			M Cross bars x2	N Drawers x6
				O Drawer bottoms x6

HARDWARE LIST

PART	QTY	SIZE / DESCRIPTION	ITEM
1	4	M7x40mm	 mm 10 20 30 40 50 60
2	19	M6x40 Bolt (Minifix)	 mm 10 20 30 40 50 60
3	27	Ø15x10mm Cam lock (minifix)	 mm 10 20 30 40 50 60
4	4	M6x63	 mm 10 20 30 40 50 60
5	4	M6 Nut cap	
6	4	M6x48 Double-Bolt (Minifix)	 mm 10 20 30 40 50 60
7	4	Ø8x40mm	 mm 10 20 30 40 50 60
8	6	M4x25mm	 mm 10 20 30 40 50 60
9	12	M6x25	 mm 10 20 30 40 50 60
10	6 Sets	138mm Handle (x6) + M4x10 screws (x12)	 138 mm

ANTI TIP-OVER HARDWARE


PART	QTY	SIZE / DESCRIPTION	ITEM
13	2	200x25mm Safety strip	 200 mm
14	2	M4x30mm Wall Anchor	 mm 10 20 30 40 50 60
15	2	M4x60mm	 mm 10 20 30 40 50 60

TOOLS INCLUDED


Combination Allen Key
(Hex + Phillips)M10/M12 Hex wrench
(Spanner)

TOOLS REQUIRED BUT NOT INCLUDED

Pencil

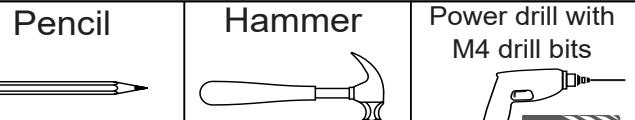

Hammer

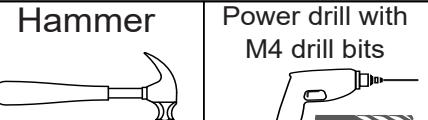Power drill with
M4 drill bitsFor Support, Assembly Questions & Replacement Parts Within the 48 Contiguous
United States:Please email us at: support@rtaproducts.com

Replacement Parts for International Customers & AK-HI-PR orders:

RTA Products will replace the part free of charge, while the customer is responsible
for shipping costs plus any International local taxes or duties.

ASSEMBLY STEPS

WE RECOMMEND TO PLACE THE PIECES OVER BLANKETS OR TABLECLOTHS TO PROTECT THEIR FINISH DURING ASSEMBLY.


STEP 1

Hardware

1	 M7x40mm	2 Pcs
Tools (included)		




Assemble F to the bottom of C with #1.

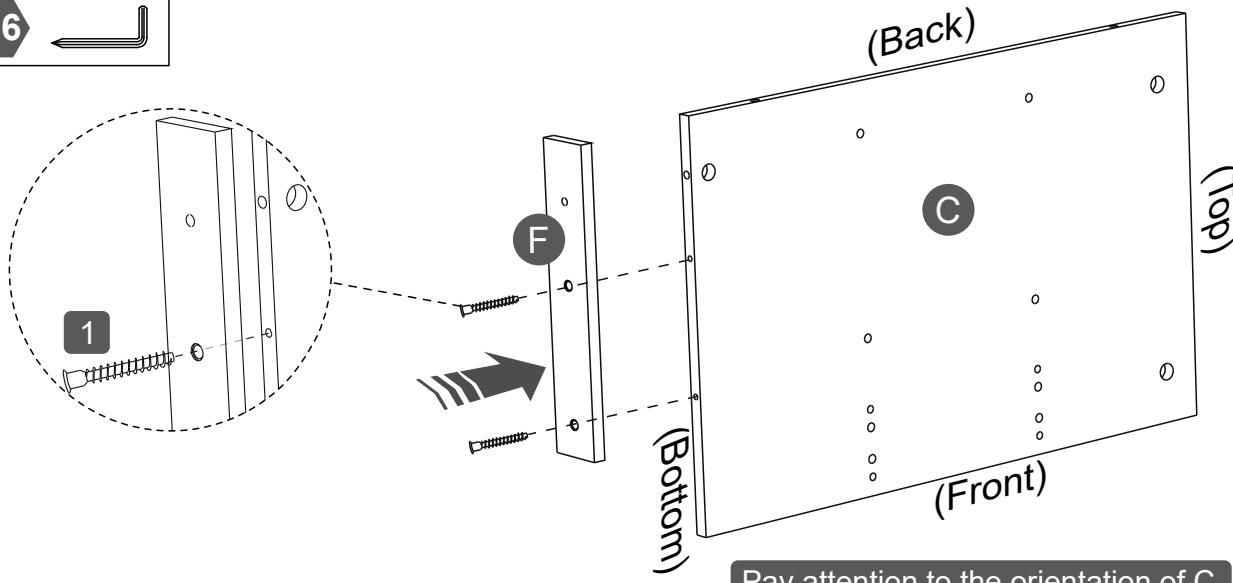


STEP 2

Hardware

1	 M7x40mm	2 Pcs
Tools (included)		



Assemble J to G and K with #1.

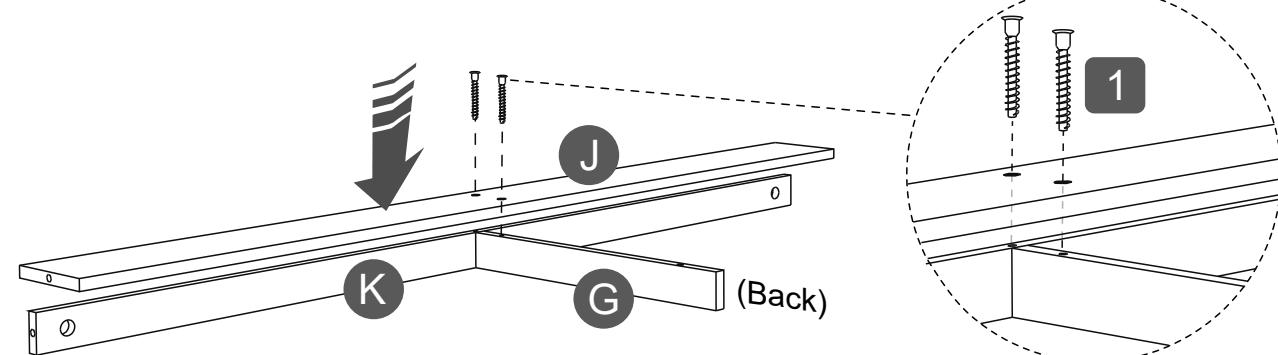


ASSEMBLY STEPS

STEP 3


Hardware

2		1 Pcs
3		1 Pcs
Tools (included)		

FIRST: Attach one bolt #2 to G.

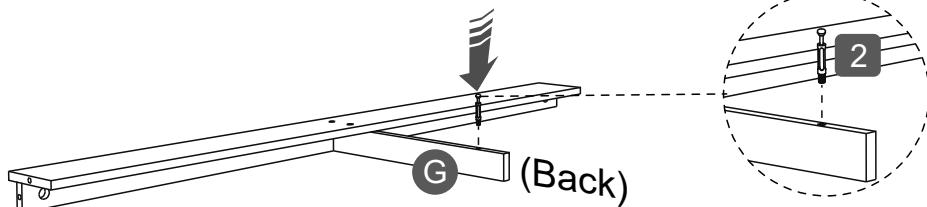

THEN: Join G to F, insert #3 into C, and turn it to lock the pieces.

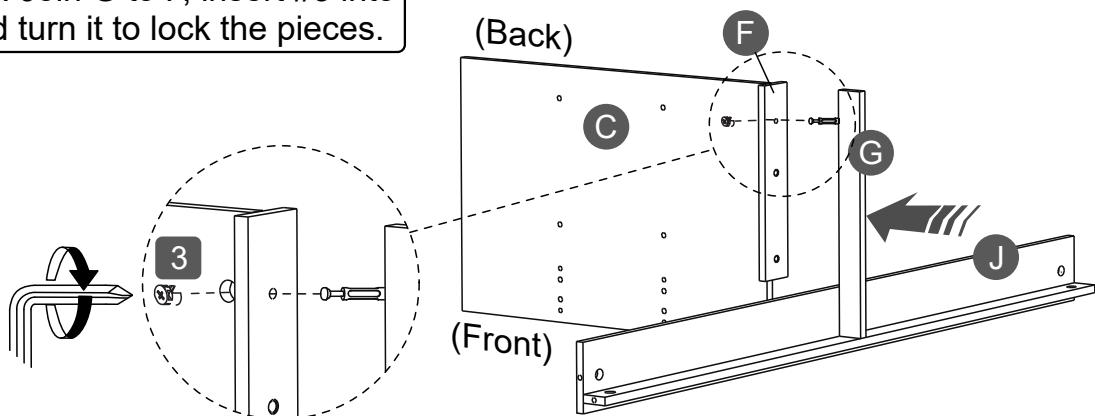


STEP 4

This step requires of 2 people

Hardware

4		4 Pcs
5		4 Pcs
Tools (included)		

Assemble E to each side of C with #4 and #5. The screws #5 go from one side to the other through E, C, E, and cathes into nut #5.

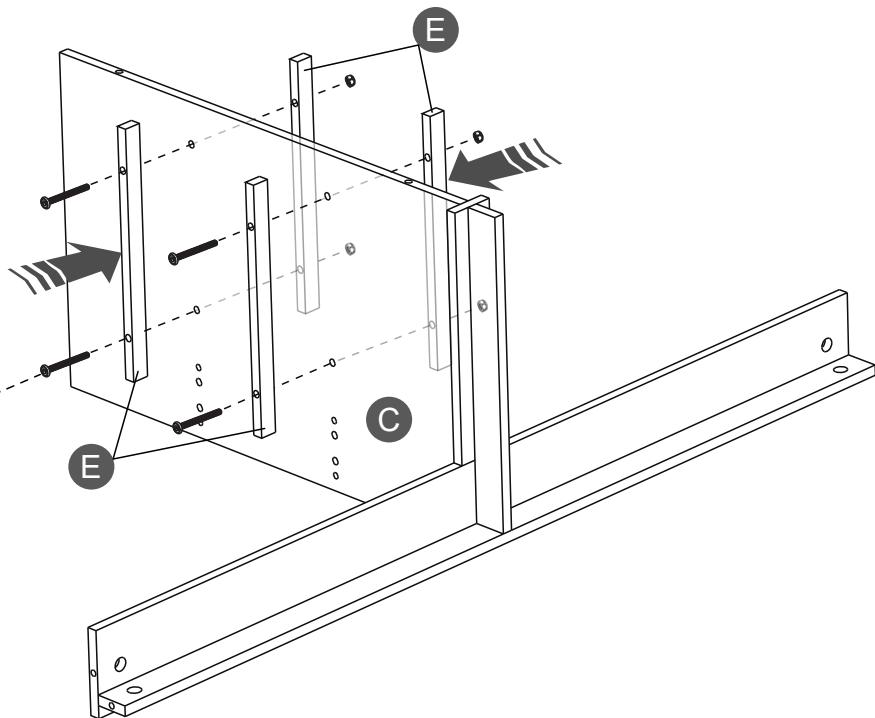

ASSEMBLY STEPS

STEP 5

Hardware

3	 Ø15x10mm	8 Pcs
6	 M6x48mm	4 Pcs
7	 Ø8x40mm	4 Pcs


Tools (included)



Tools (Not included)




FIRST: Insert the double bolts #6 into the indicated holes on only 2 of the 4 panels D and lock the bolts with #3.

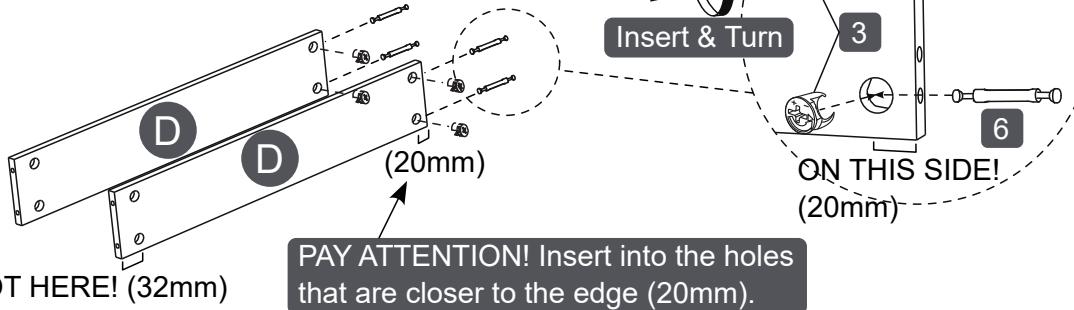


PAY ATTENTION! Insert into the holes that are closer to the edge (20mm).


THEN: Insert the longer dowels #7 in the other holes on that same side.

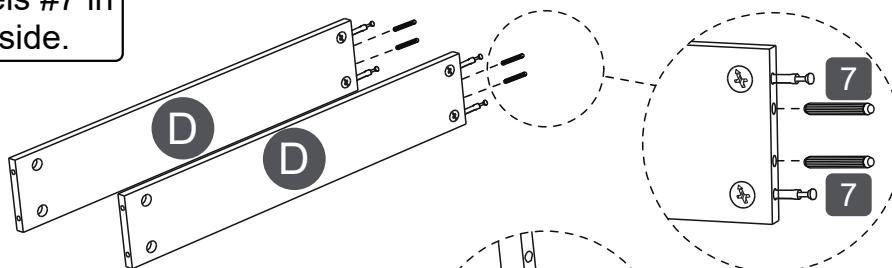

THEN: Connect those 2 panels D to C. The bolts and dowels will come out on the other side of C.

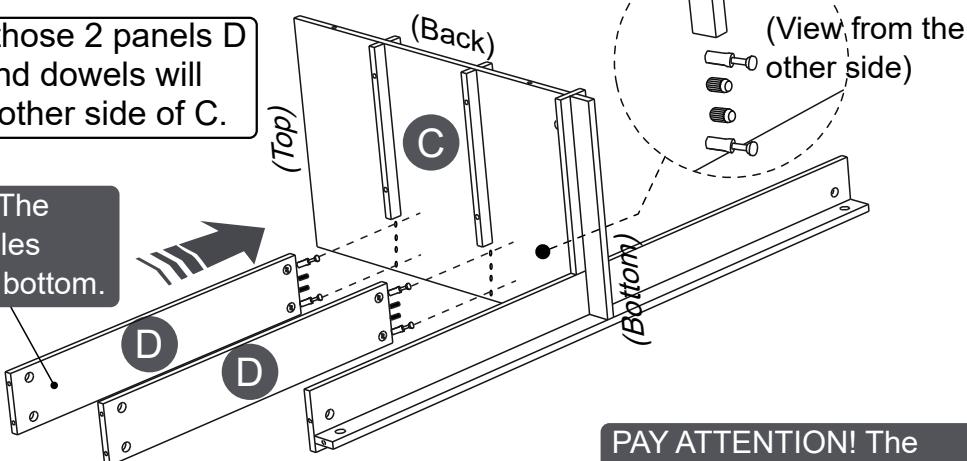

LAST: On the other side of C, connect the other 2 panels D with #3 as shown.

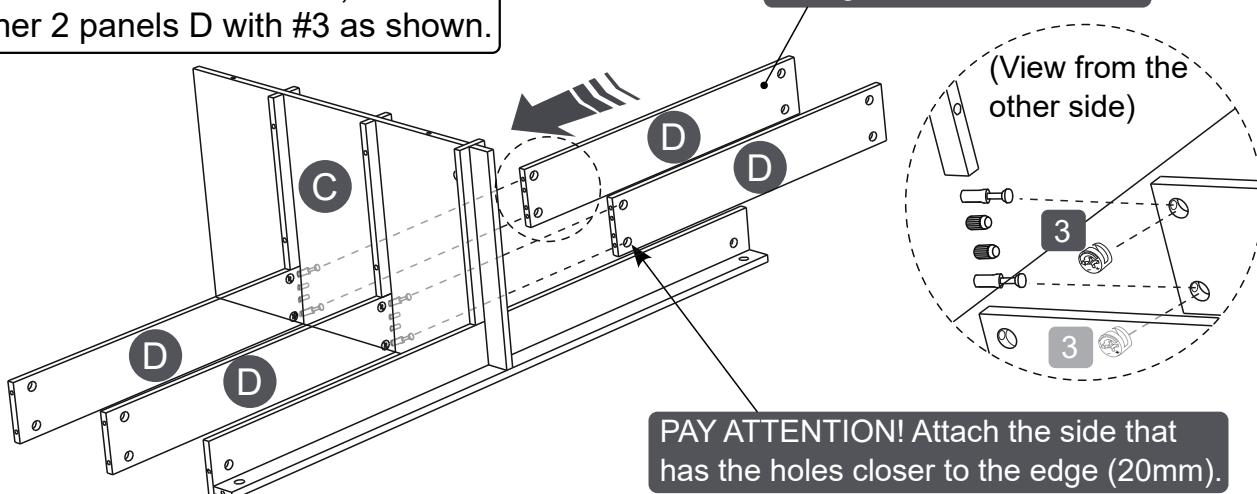

(View from the other side)

PAY ATTENTION! Attach the side that has the holes closer to the edge (20mm).

ASSEMBLY STEPS

STEP 6

Hardware


2	 M6x40	12 Pcs
9	 M6x25	12 Pcs

Tools (included)


M6

FIRST: Attach H to A with #9.

THEN: Attach I to B with #9.

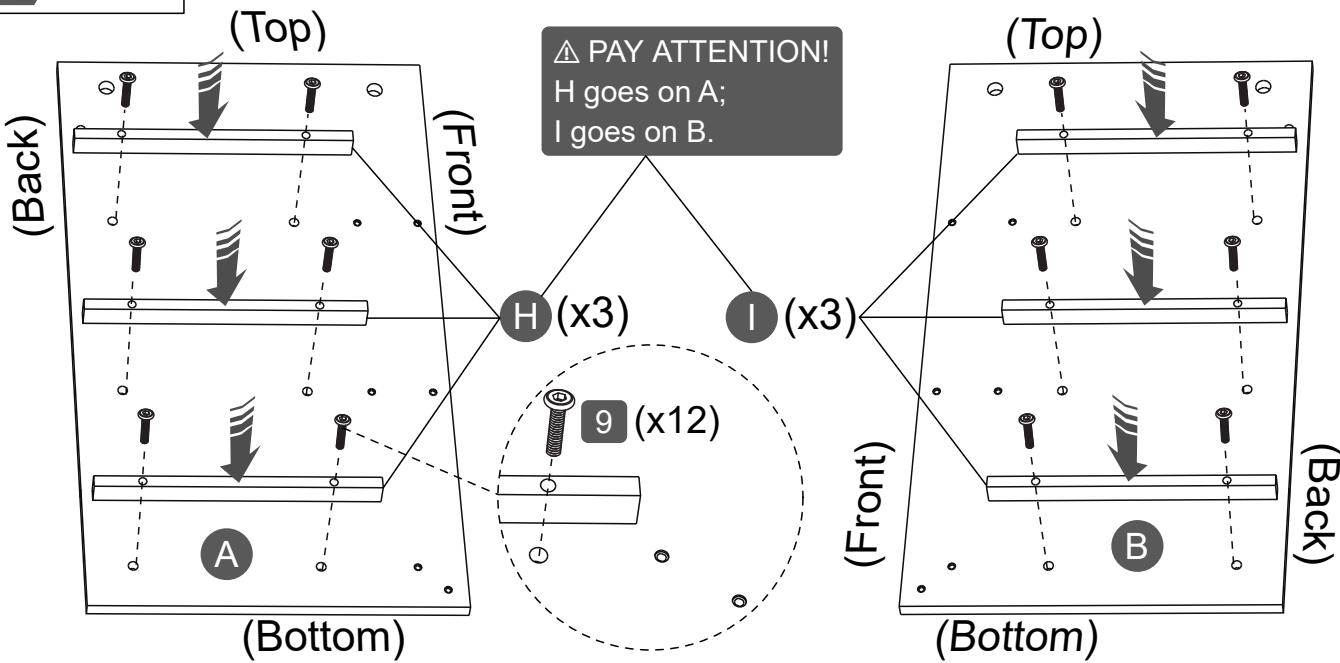

LAST: Attach #2 to both A and B.

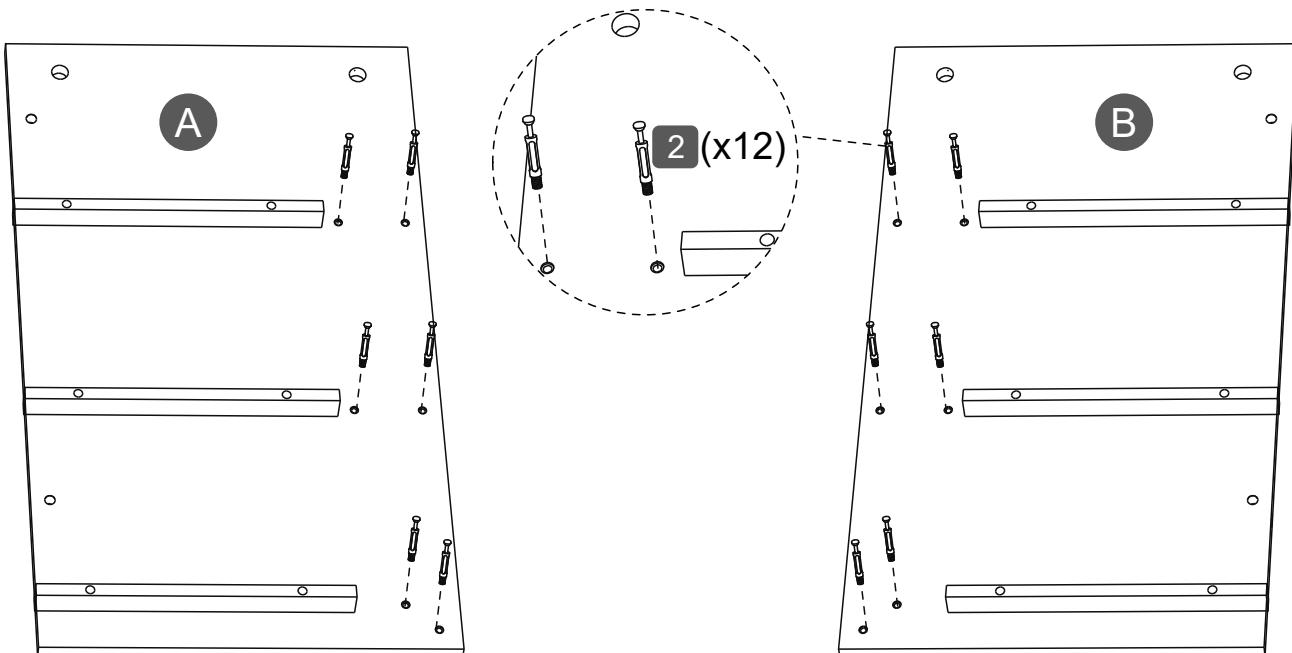

ASSEMBLY STEPS

STEP 7

This step requires of 2 people

Hardware


3		12 Pcs
	$\varnothing 15 \times 10 \text{mm}$	

Tools (included)




FIRST: Use #3 to attach:

- A to D, J and K on the RIGHT side;
- B to D, J and K on the LEFT side.

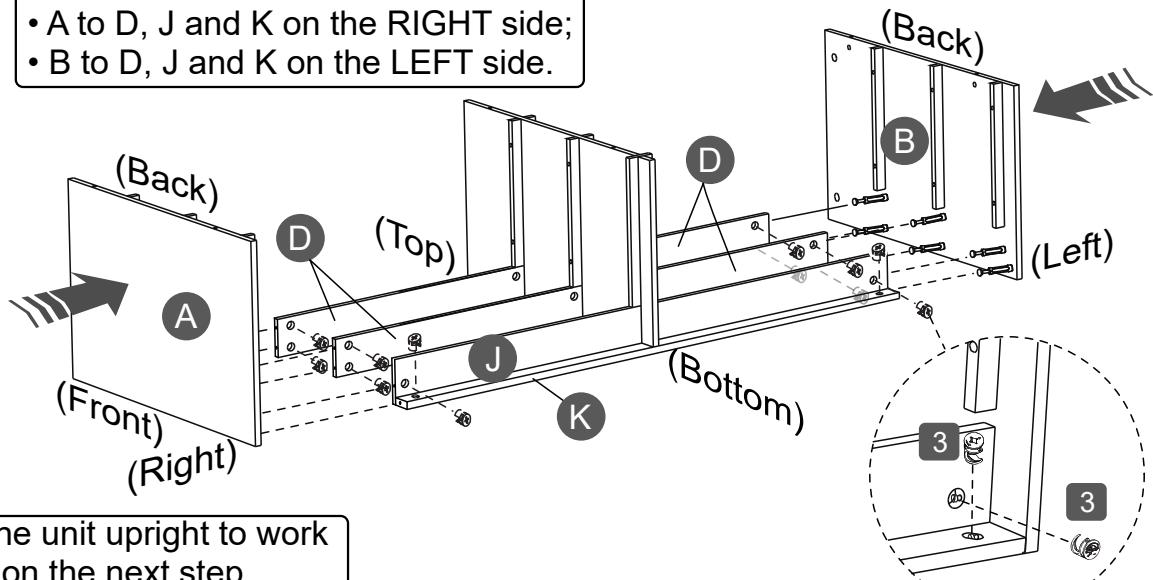

THEN: Flip the unit upright to work from its back on the next step.

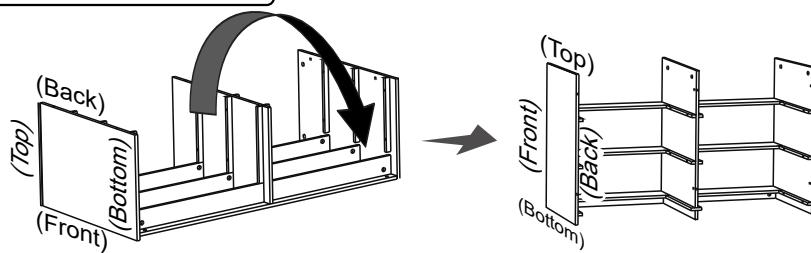

STEP 8

This step requires of 2 people

Hardware


2		6 Pcs
	$\varnothing 6 \times 40 \text{mm}$	

3		6 Pcs
	$\varnothing 15 \times 10 \text{mm}$	

Tools (included)




FIRST: Attach #2 to L.

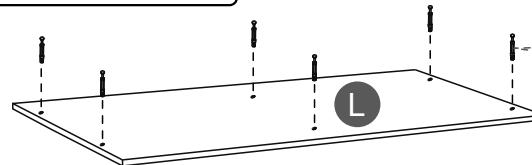

2 (x6)

THEN: Attach L to A, B and C with #3.

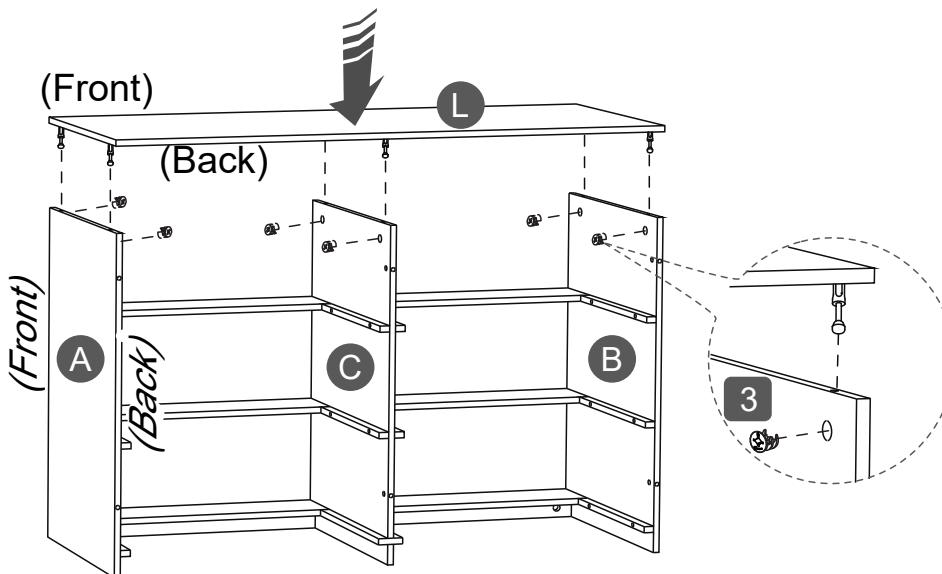

TIP OVER WARNING!

VERY IMPORTANT - PLEASE READ!



Children have died from furniture tip over. To reduce the risk of tip over:

- Install the anti tipping device that is included with this product.
- Follow the instructions on the next page of this manual for installing the anti tipping device and have the unit secure to a wall.
- NEVER allow children to stand, climb, or hang on drawers, doors or shelves.
- Place heaviest items in the lowest drawers.
- NEVER put a TV on this furniture.

Please continue with the rest of the assembly instructions on the next page. Thank you.

ASSEMBLY STEPS


STEP 9

This step requires of
2 people

Hardware

8	 M4x25mm	6 Pcs
13	 Safety Strip	2 Pcs
14	 Anchor	2 Pcs
15	 M4x60mm	2 Pcs


Tools (included)

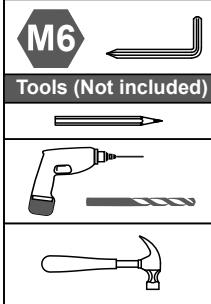

Tools (Not included)


DO NOT SKIP THE INSTALLATION
OF THE ANTI TIPPING DEVICE!

FIRST: On the back of the unit, attach the cross bars M to the panels A, B and C with screws #8, with the Safety Strips #13 also installed AT THE TOP AND UNDER the cross bars on A and B.

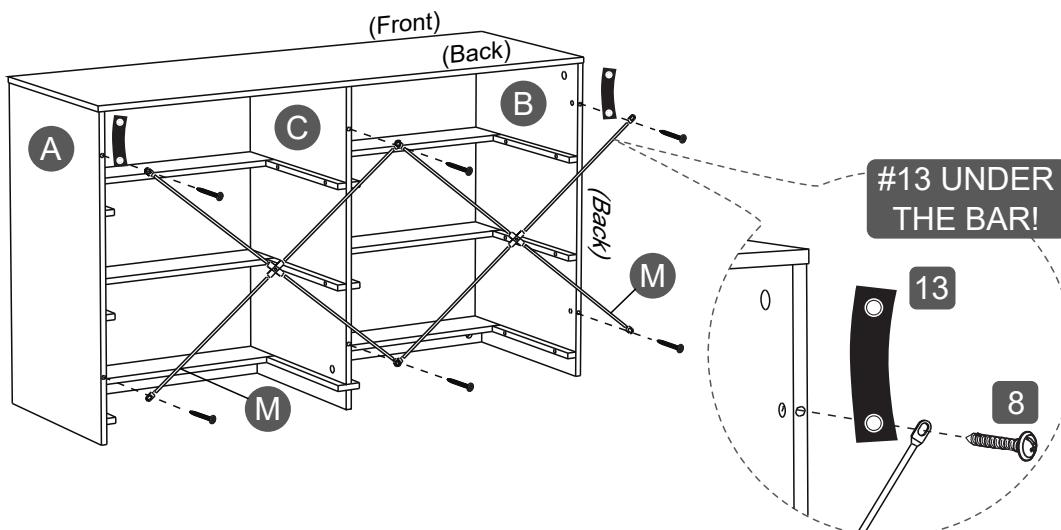

THEN: Put the unit against the wall where it will stay, and use a driller (not included) to make 2 holes on the wall and insert the anchor #14 for the 2 safety strips.

LAST: Secure the safety strips to the anchors with screws #15.

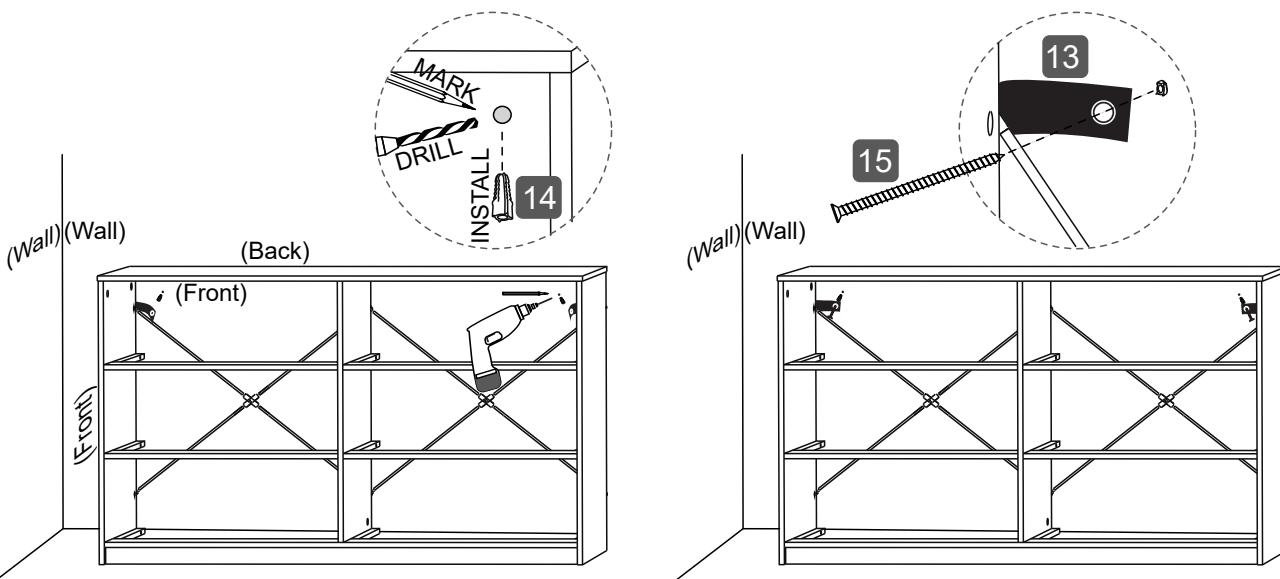



ASSEMBLY STEPS

STEP 10


Hardware

10 Handle with 2 screws

FIRST: Unfold the drawers N and place the bottoms O into each of them.

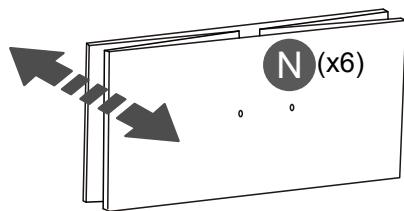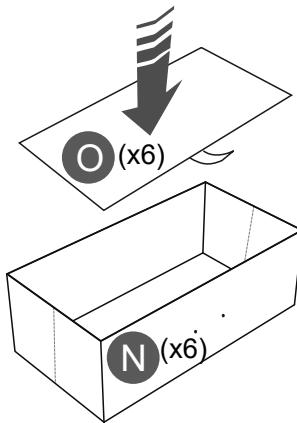

THEN: Attach the handles #10 to the drawers with their own screws.

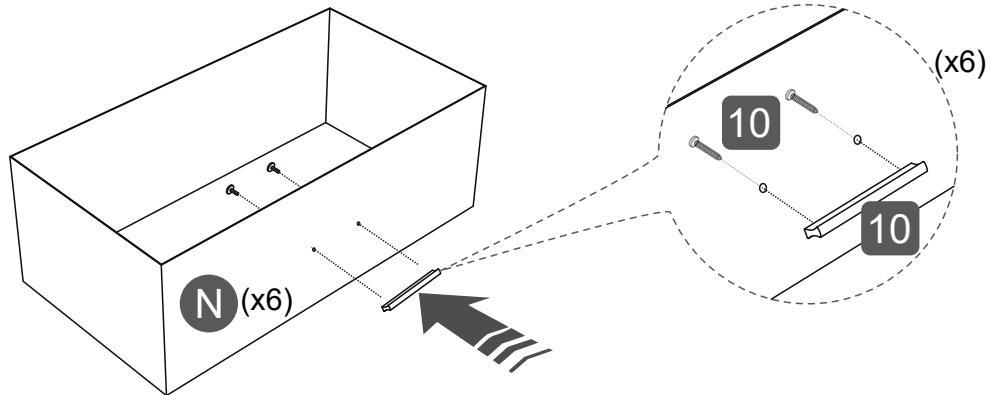

FINALLY: Insert the drawers into the unit.




WARNINGS

Not paying attention to the following warnings could result in injuries.

Children have died from furniture tip over. To reduce the risk of tip over:

- Make sure you have installed the anti tipping device that has been included with this product.
- NEVER allow children to stand, climb, or hang on drawers, doors or shelves.
- Place heaviest items in the lowest drawers.
- NEVER put a TV on this furniture.
- Every 4 months, inspect the anti tipping device to make sure it is still secured to both the unit and the wall.
- Do not exceed the indicated weight limits.

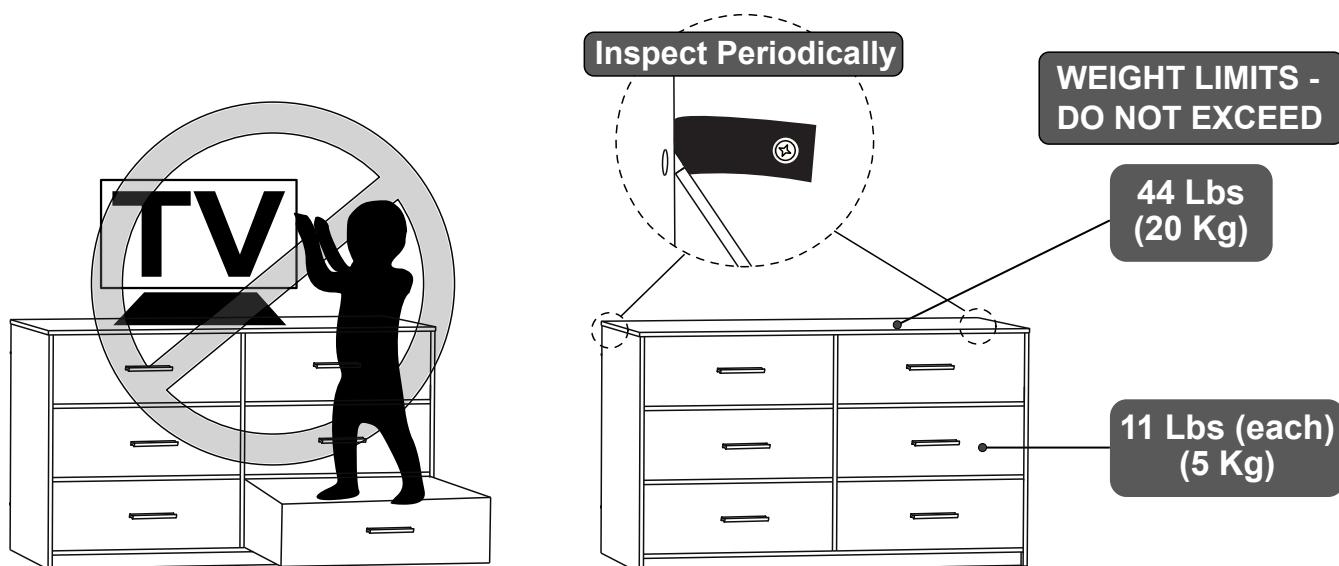

CARE AND MAINTENANCE


Clean with a cloth lightly damped in a solution of mild soap and water.




Do not use solvents or abrasive materials.



Do not expose to direct sunlight or extreme environmental conditions.

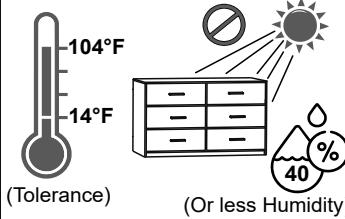

Inspect and re-tighten loose screws on the unit every 4 months.



LIMITED WARRANTY



For details, please visit our website:
TechniHome.com

To file a claim or request information, please email to:
warranty@rtaproducts.com

