


WALKER EDISON
TM

Flip-top Vanity

SKU# WEPEN09OS2

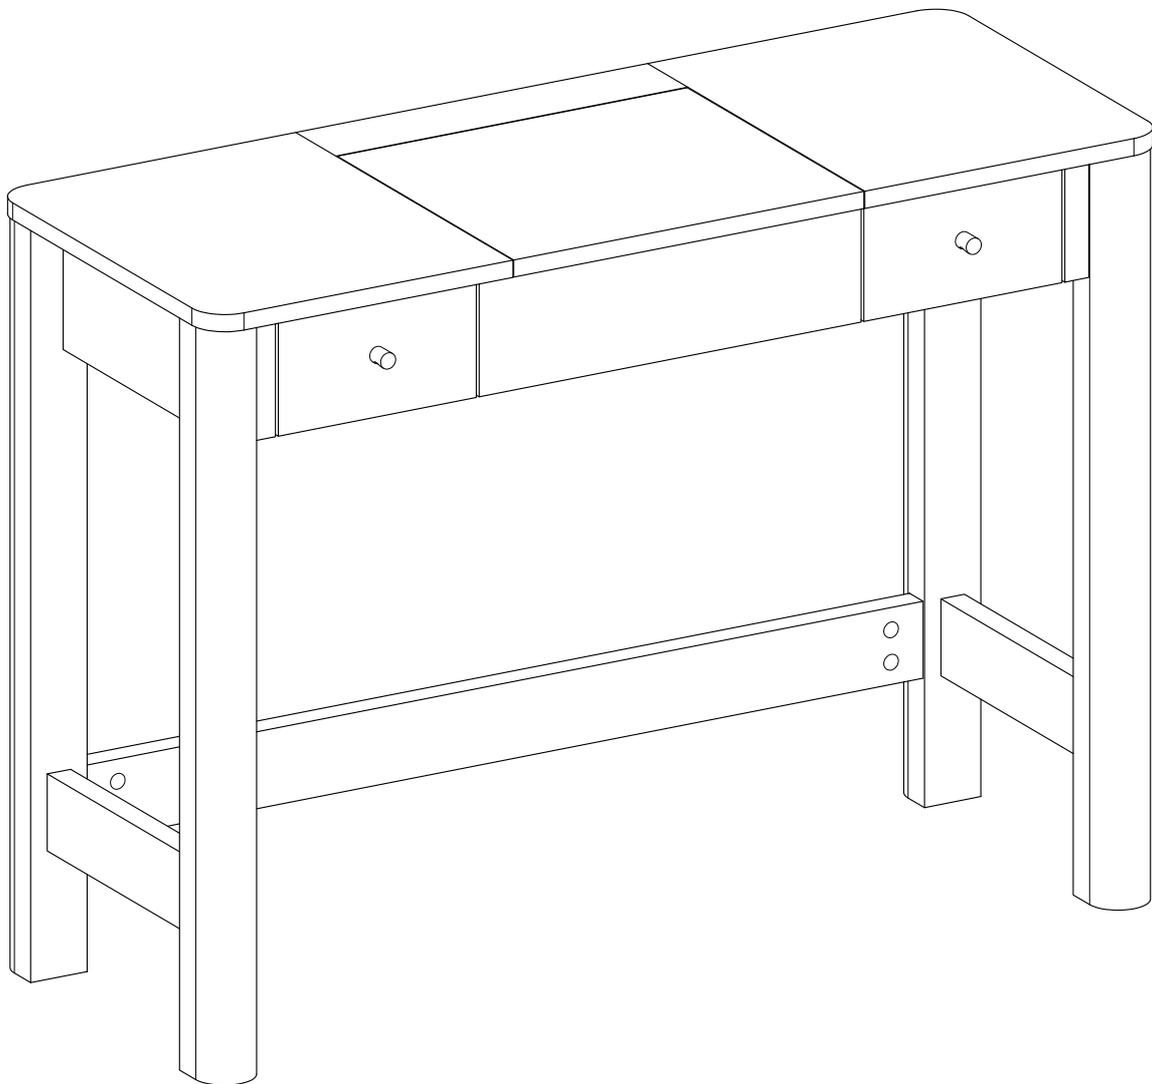

For Residential Use Only

Please visit our website for the most current instructions, assembly tips, report damage, or request parts. www.walkerredison.com



Time to get started


Set up a clean and soft workplace to get started and avoid damage during the assembly. It also helps to double-check that you've got all the pieces and parts before diving in to assembly.

Estimated time for assembly



People recommended for assembly


Make it a team effort! Grab a friend for quicker, easier assembly.



2 People Build


Tools Needed

Grab a Phillips head screwdriver to conquer this assembly



Use power tools with caution

You can cause cracking or damage to the material and easily strip the hardware. If you choose to use a power tool, your product will no longer be covered under Walker Edison's warranty.



Glue is provided to secure wood dowels in place


When inserting dowels, locate the appropriate hole, place a small amount of glue in the hole, and then insert the dowel. Wipe away excess glue immediately.




Scan to get assembly tips and help!

WE Parts List



Part Number	Description	Quantity
1	Top Frame	1
2	Left Leg Frame	1
3	Right Leg Frame	1
4	Rail	1
5	Front Drawer Panel	2
6	Back Drawer Panel	2
7	Left Drawer Panel	2
8	Right Drawer Panel	2
9	Bottom Drawer Panel	2

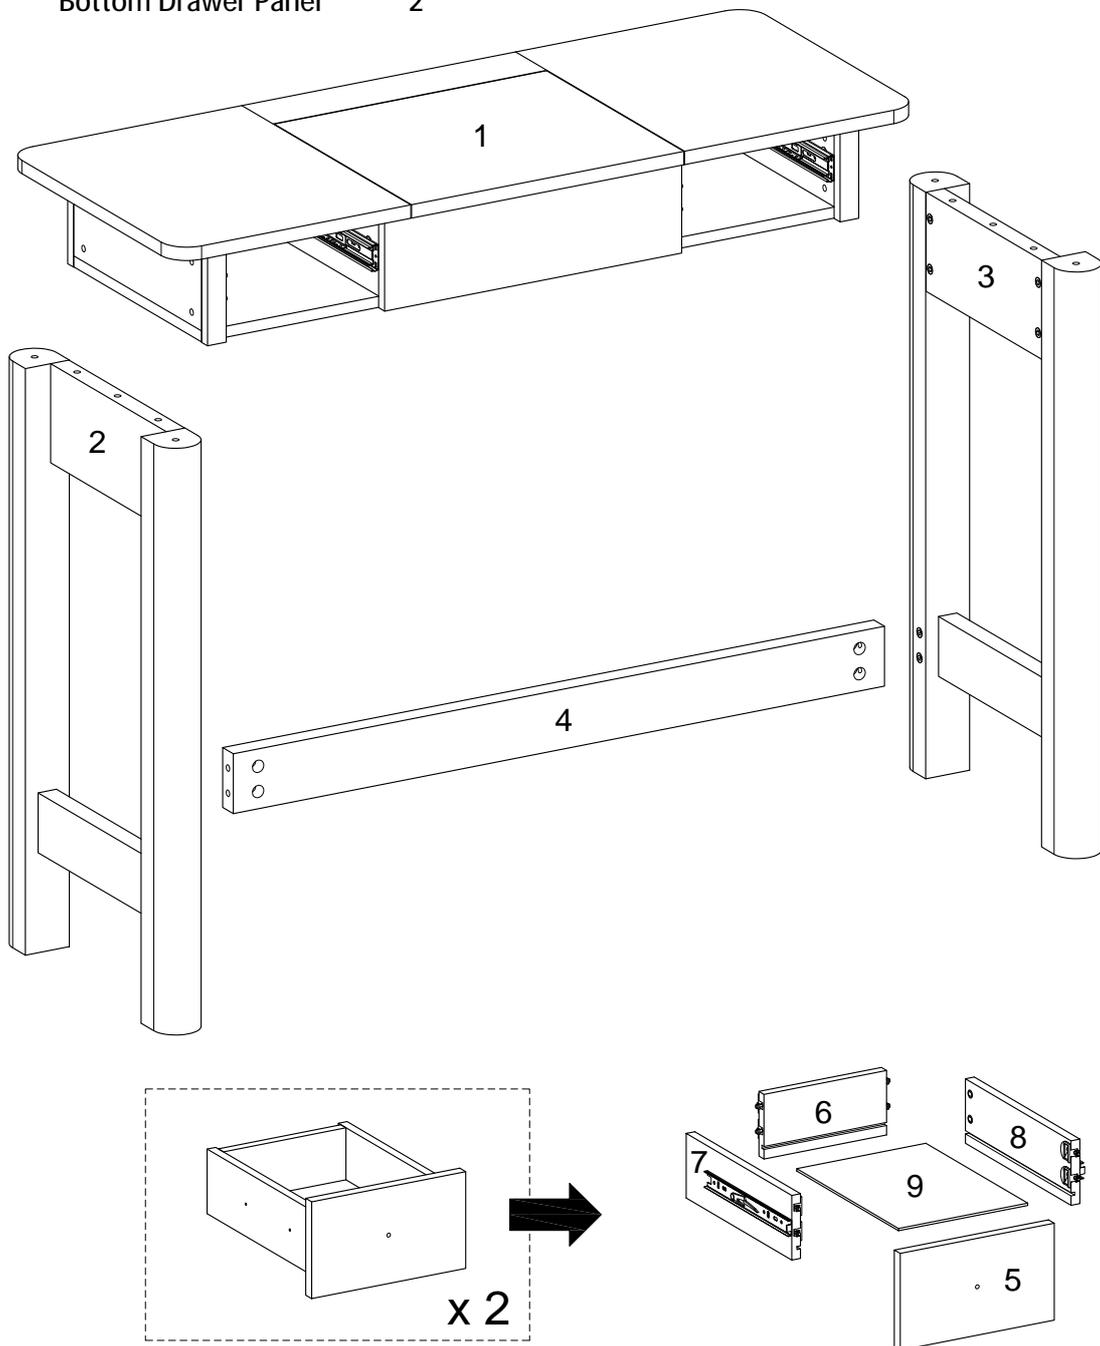

WE Hardware List

Part	Size	Name	Quantity
A	 8x30mm	Wooden dowel	10
B	 6x51mm	Cam Bolt	4
C	 15x14mm	Cam Lock	4
D	 6x7mm	Cam Lock Nut	4
E	 6x38mm	Bolt	8
F	 6.5x11x1mm	Spring washer	8
G	 6.5x16x1mm	Washer	8
H	 M4	Hex key	1
J	 5/32"x16x20mm	Handle	2
K	 5/32"x20mm	Bolt	2
L	 30mm	Sticker	20
M		USB power socket	1
N	 3.5x12mm	Screw	2




WE Hardware List

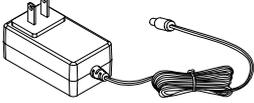Part	Size	Name	Quantity
P 	2A/12V	Power adapter	1
Q 	50mm	Cable Grommet	1
R 	10g	Glue Tube	1

The hardware quantities listed above are required for proper assembly.
Extra hardware pieces may be included.

Step 1



Let's get started! Using a Phillips head screwdriver, screw the cam bolts (B) into the Left Leg Frame (2) and the Right Leg Frame (3). Then, insert wooden dowels (A) into the tops of both pieces.

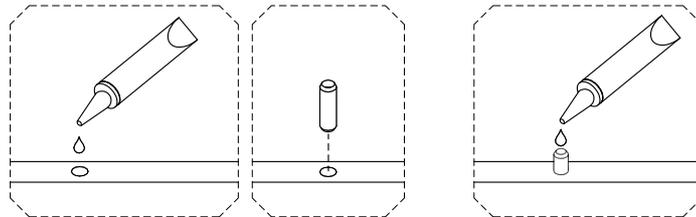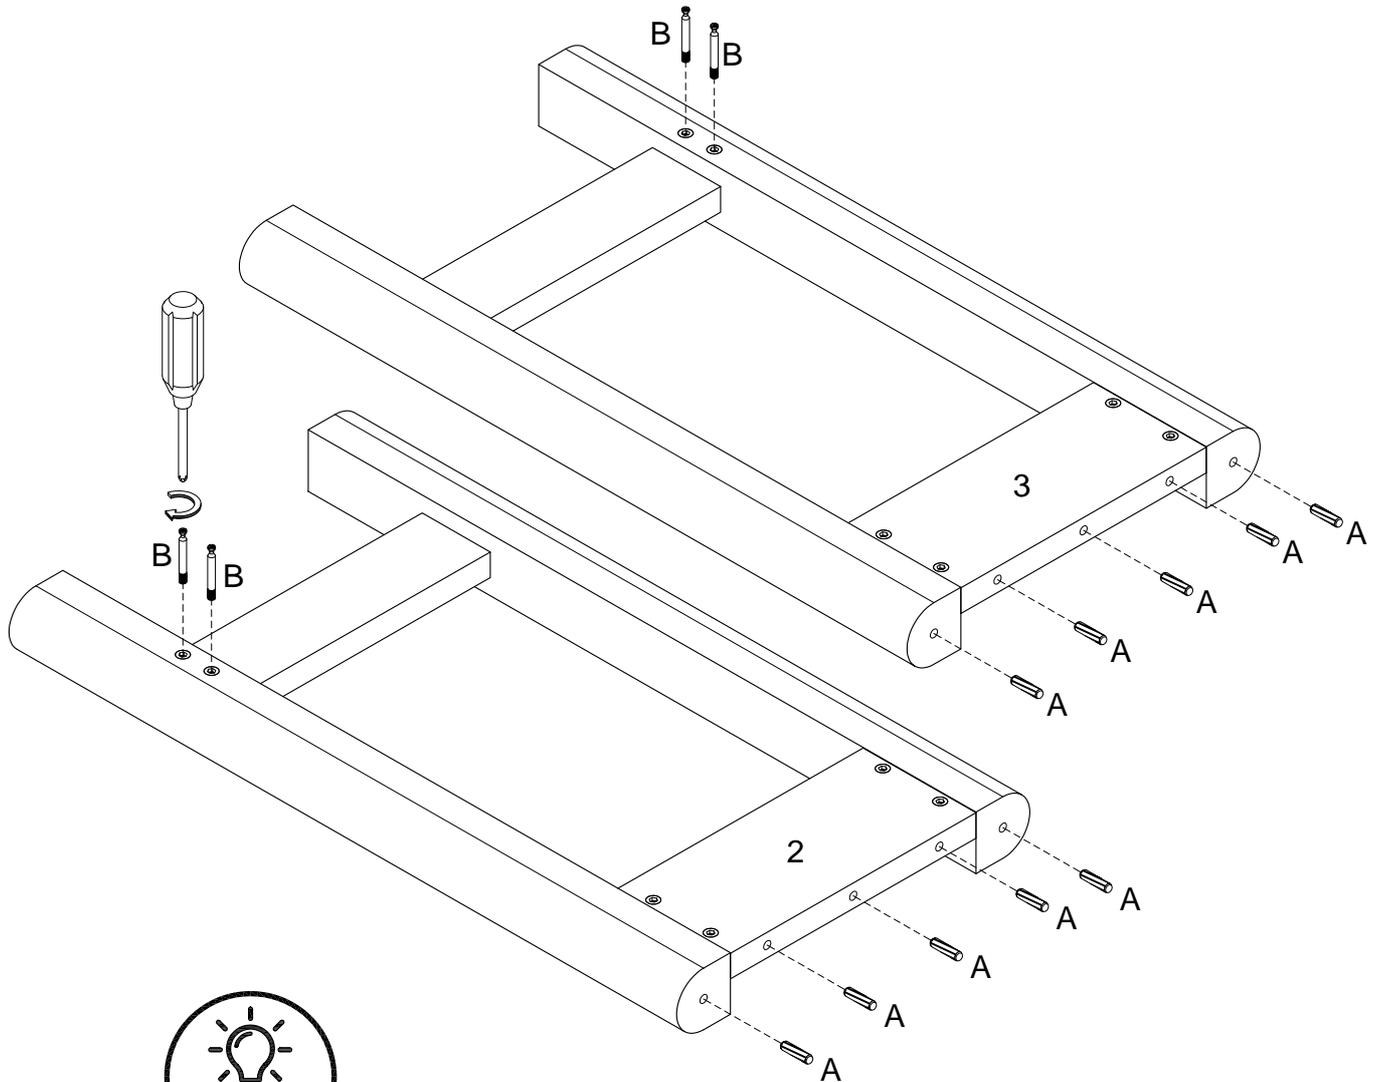

- 1: The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.
- 2: In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.

Step 2


Place cam locks (C) into the designated holes on the Rail (4). Attach the Rail (4) to the Left Leg Frame (2) and secure with the cam lock nuts (D). Tighten with a screwdriver.

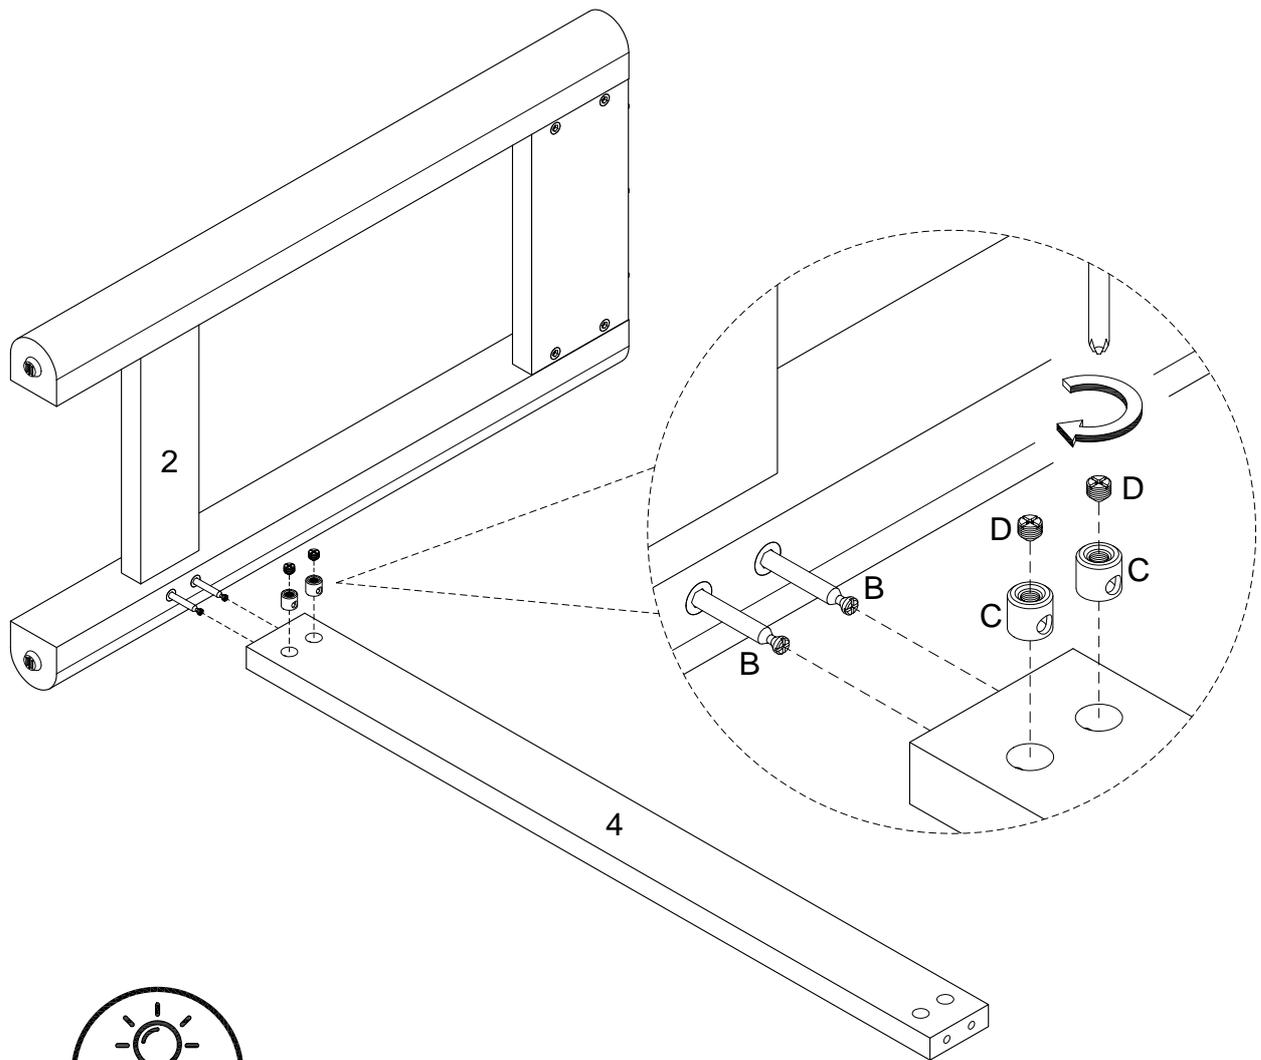


Tip

Cam Locks


Cam Locks help securely join two pieces together. Follow these easy steps.



1: Place the Cam Lock into the designated hole.




2: Join the two pieces by sliding the Cam Bolt into the hole on the side of the piece.



3: Insert the Cam Lock Nut and securely tighten it with a screwdriver.


Step 3

Repeat the previous step on the other side! Place cam locks (C) into the designated holes on the Rail (4). Attach the Rail (4) to the Right Leg Frame (3) and secure with the cam lock nuts (D). Tighten with a screwdriver.

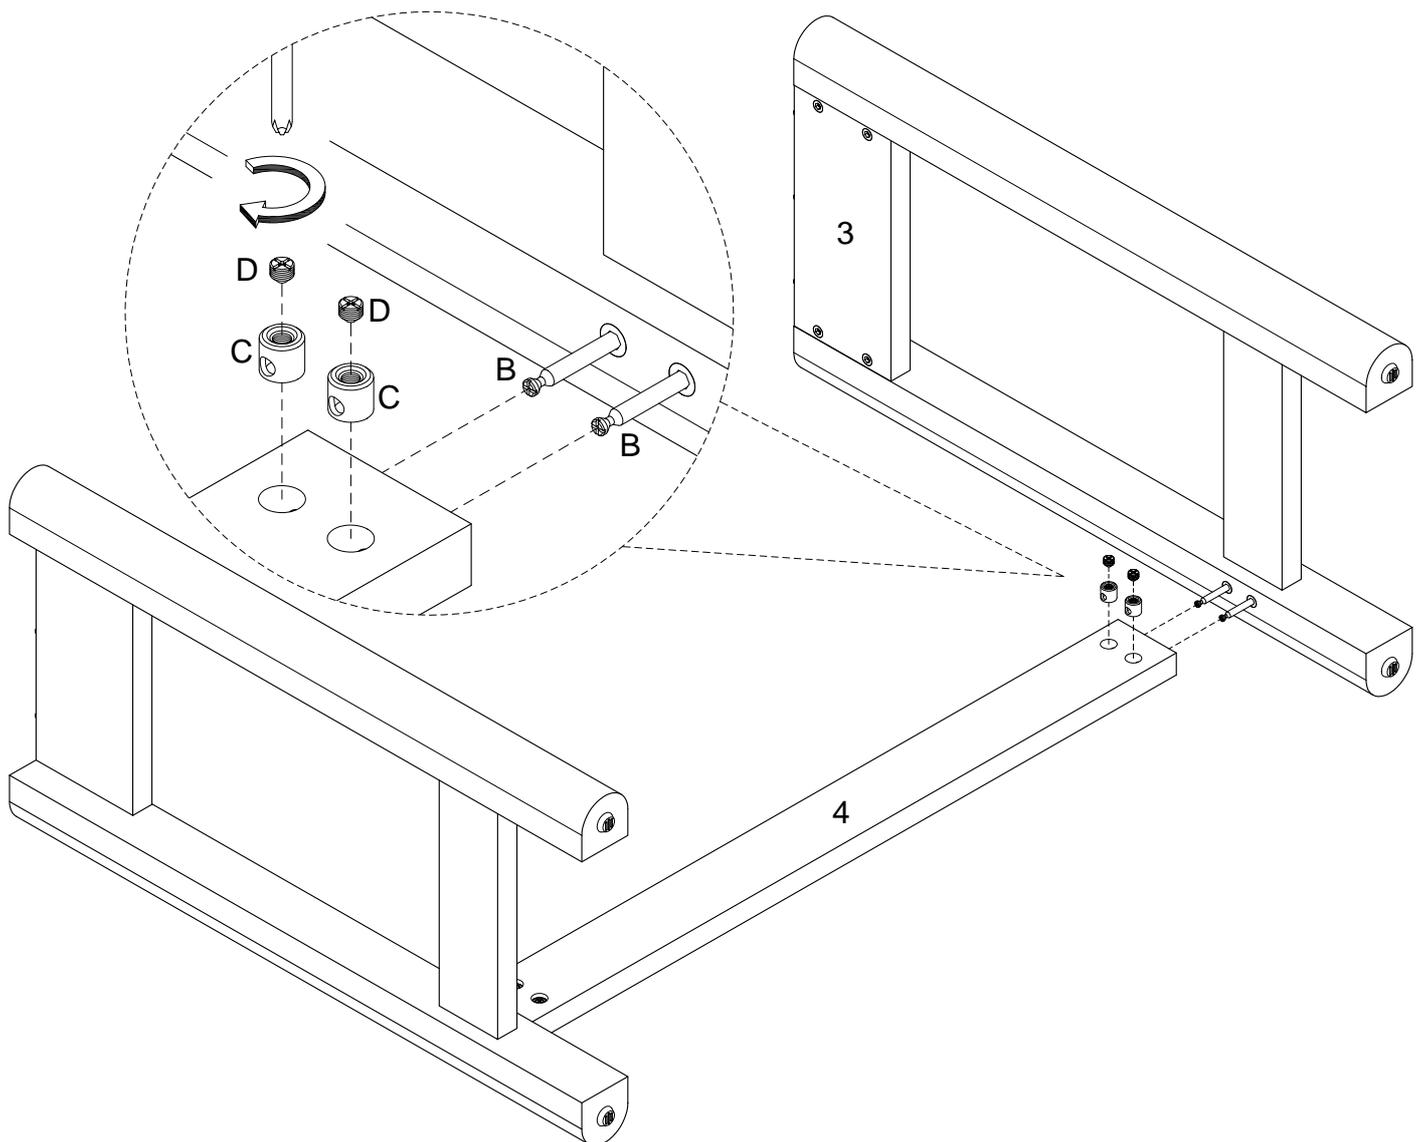


Step 4

Attach the Top Frame (1) to the Left Leg Frame (2) and the Right Leg Frame (3) using the wooden dowels (A).

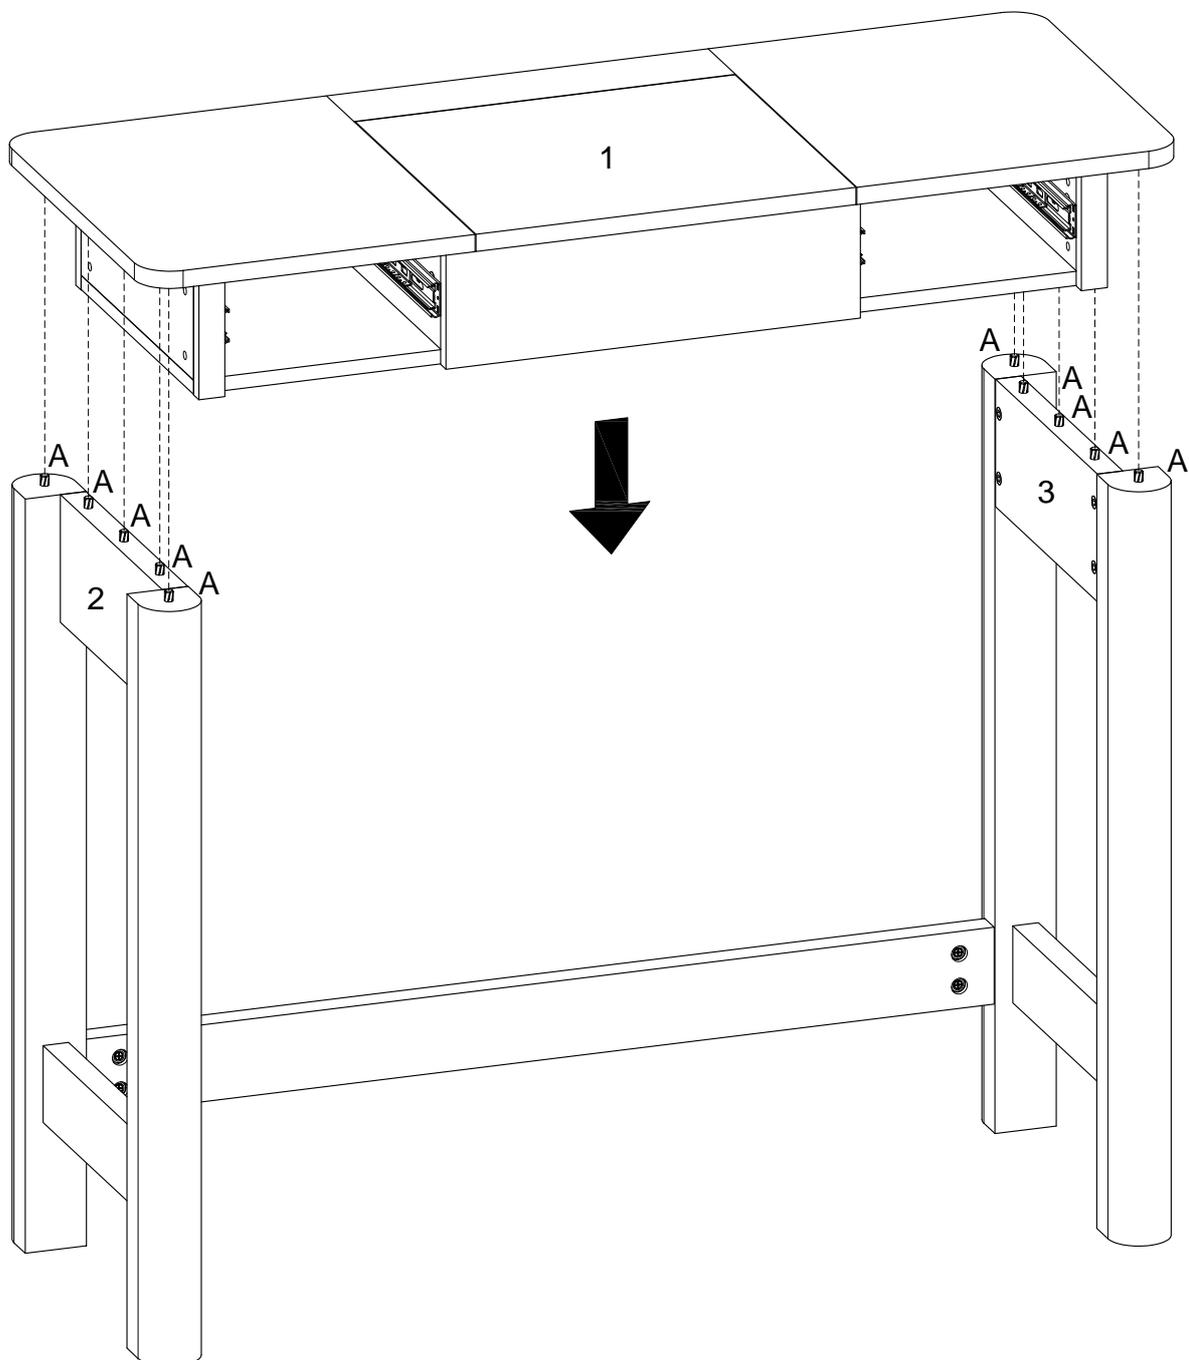


Step 5

Secure the Top Frame (1) in place using the (E) bolt, spring washer (F), and washer (G). Tighten with the provided Hex Key (H).

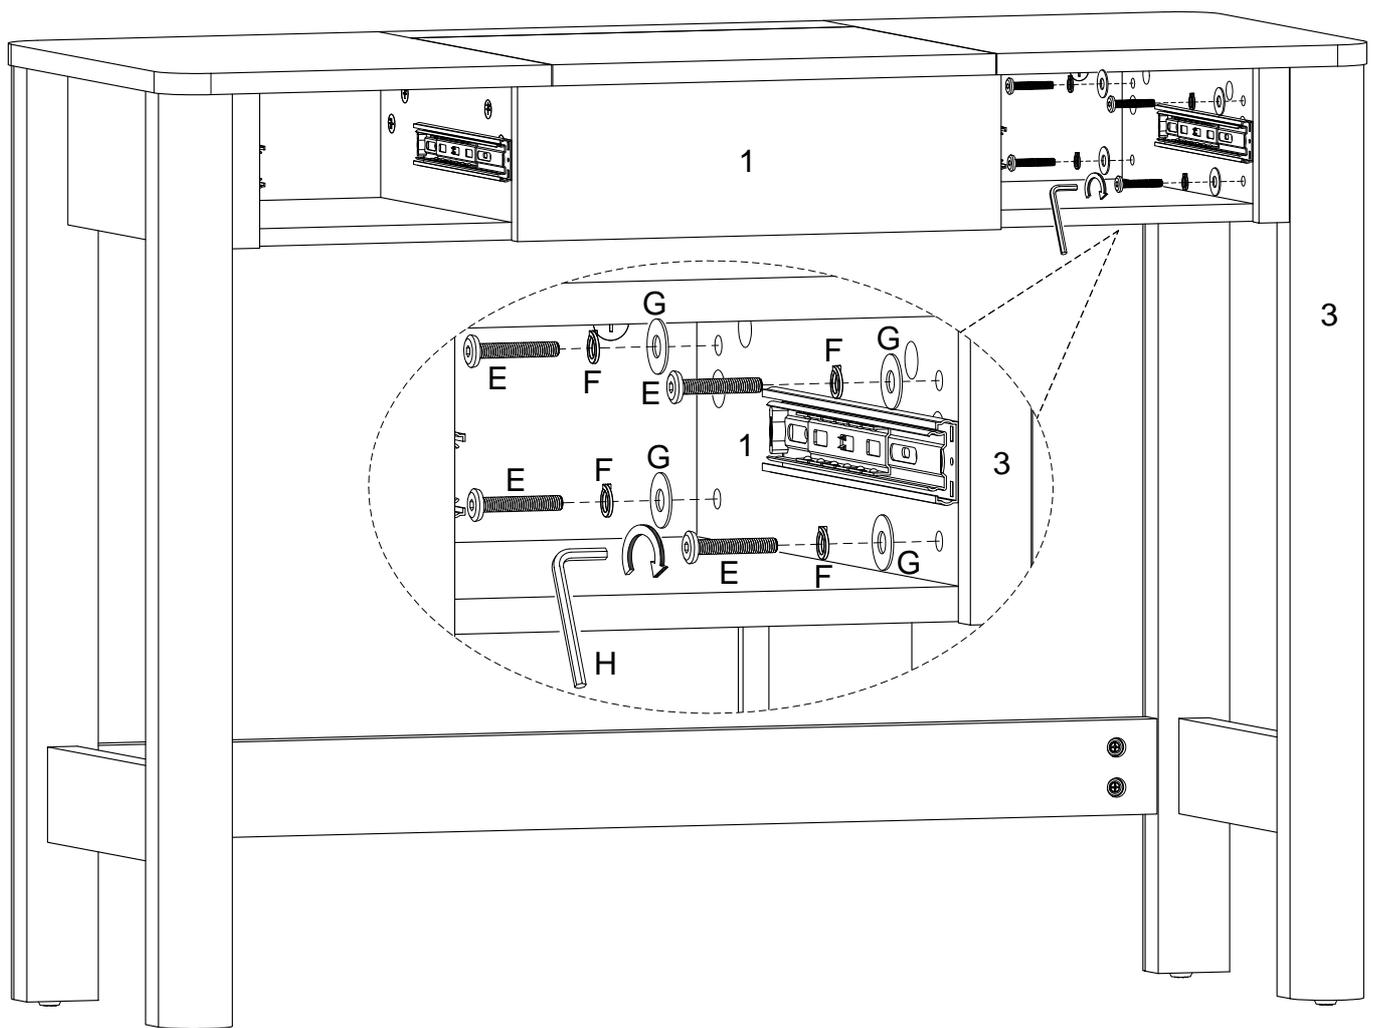



Step 6

Repeat the previous step for the other side! Secure the Top Frame (1) in place using the (E) bolt, spring washer (F), and washer (G). Tighten with the provided Hex Key (H).

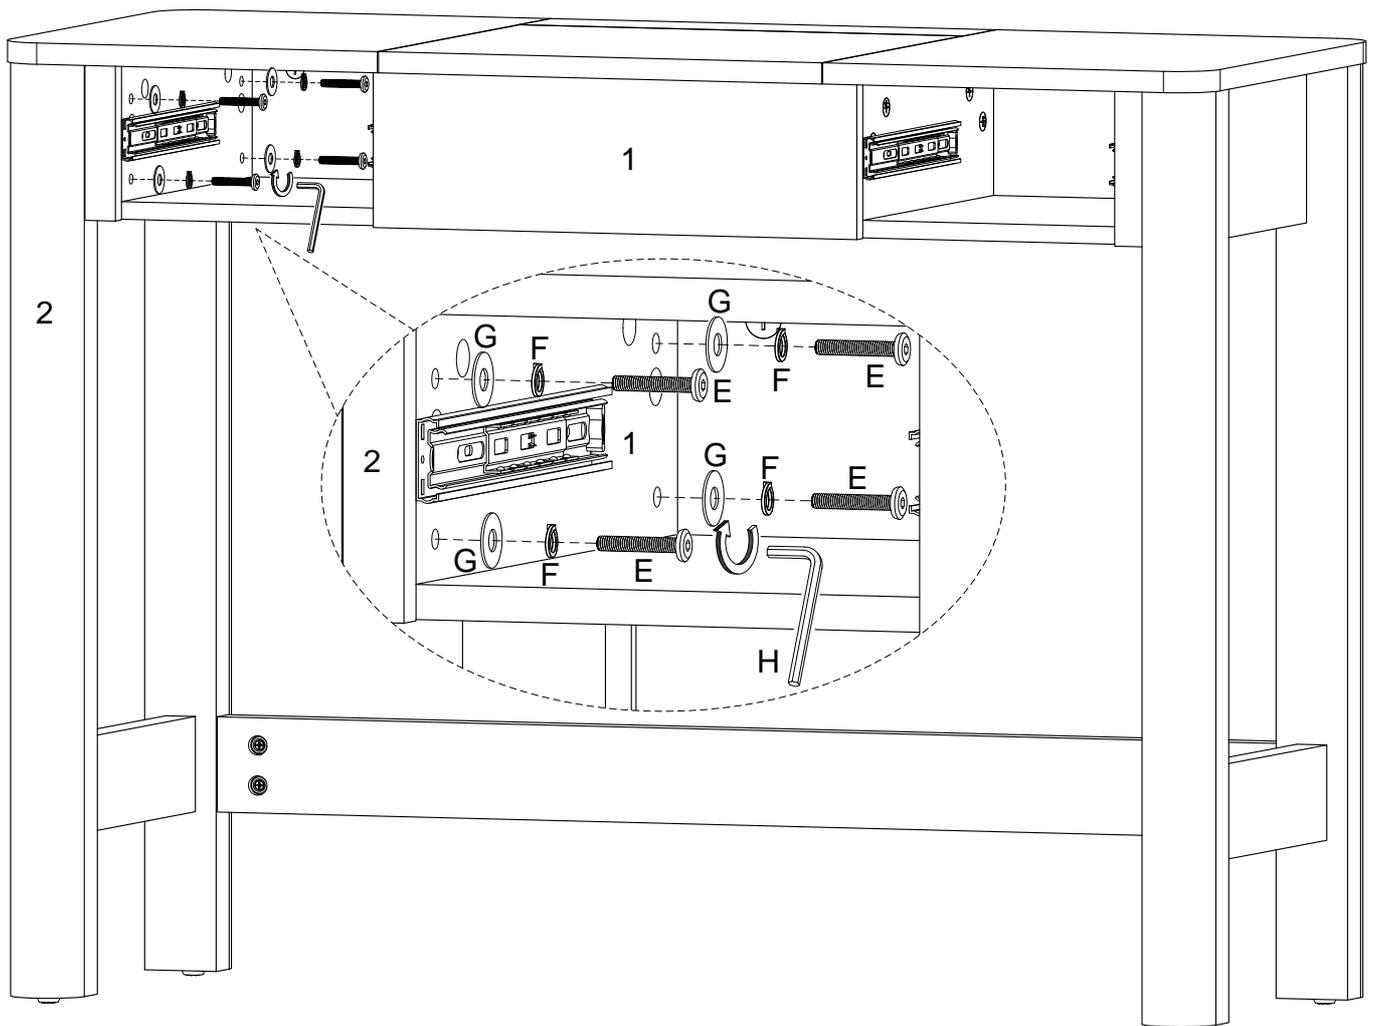


Step 7


Using the quick assembly mechanism, secure the Right Drawer Panel (8) and Left Drawer Panel (7) to the Back Drawer Panel (6). Repeat this step two more times.

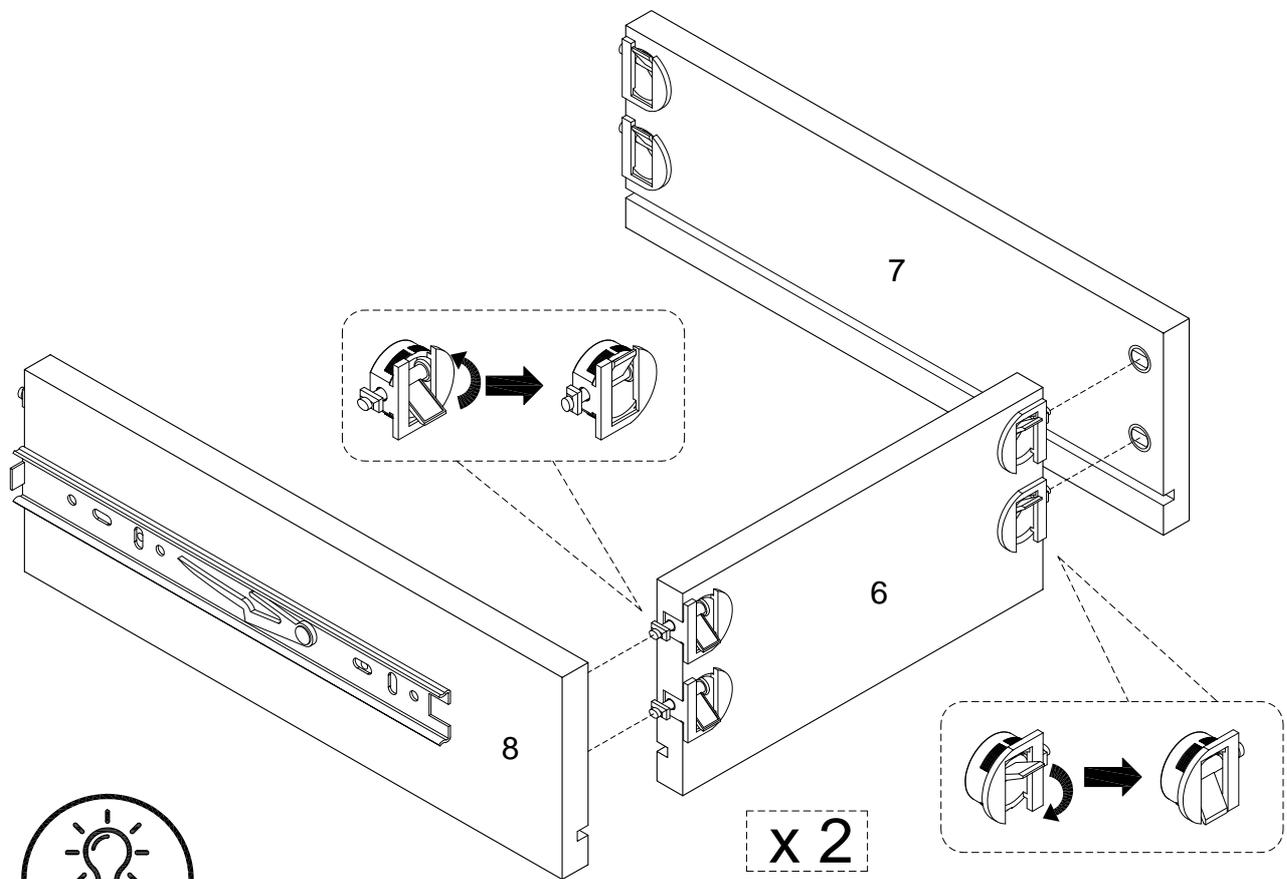

Quick Assembly Drawers

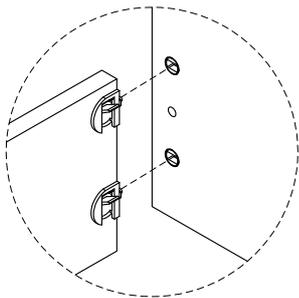


1. Make quick assembly drawer pin is aligned with corresponding hole.

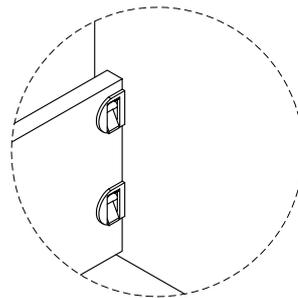

2. Once pin is inserted correctly flip metal lever in opposite direction to ensure panels are firmly locked together.

Step 8


Slide the Bottom Drawer Panels (9) into the grooves of the drawer.

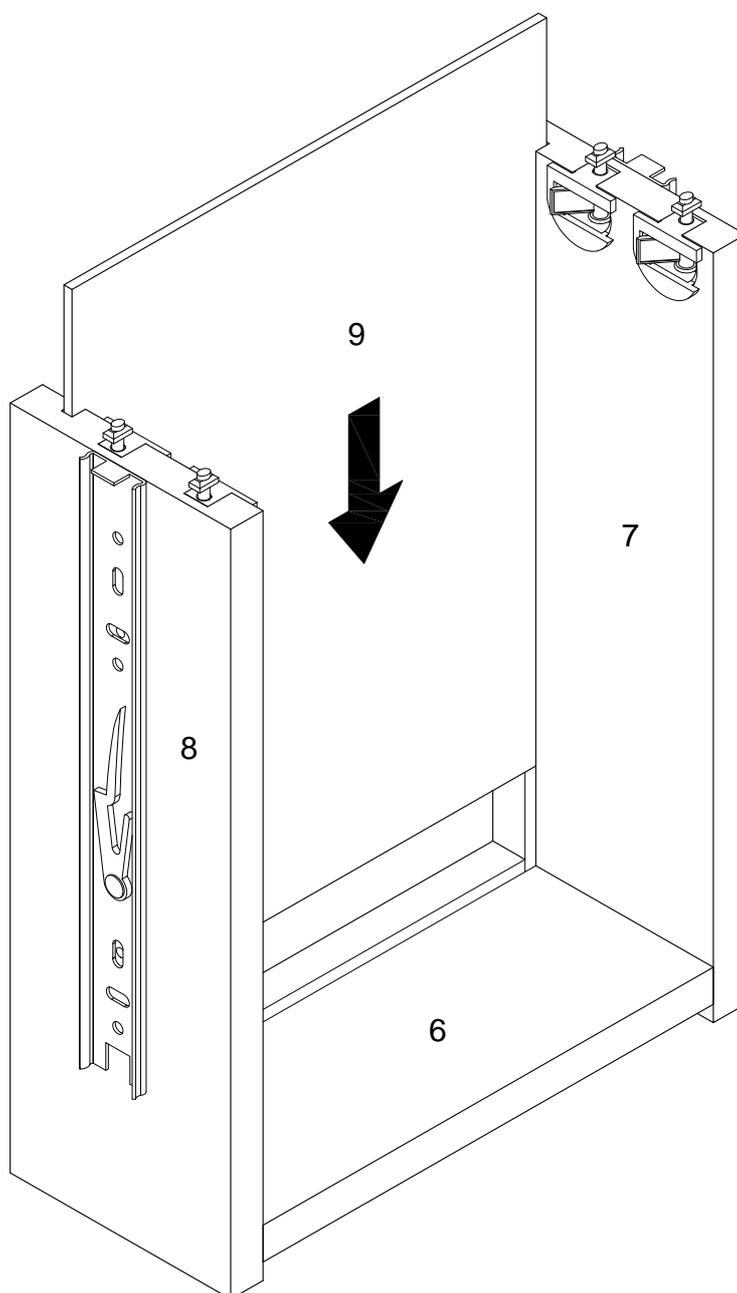

x 2


Step 9

Attach the Front Drawer Panels (5) to the drawer sides, making sure the dowels and pins are aligned. Repeat this step two more times.

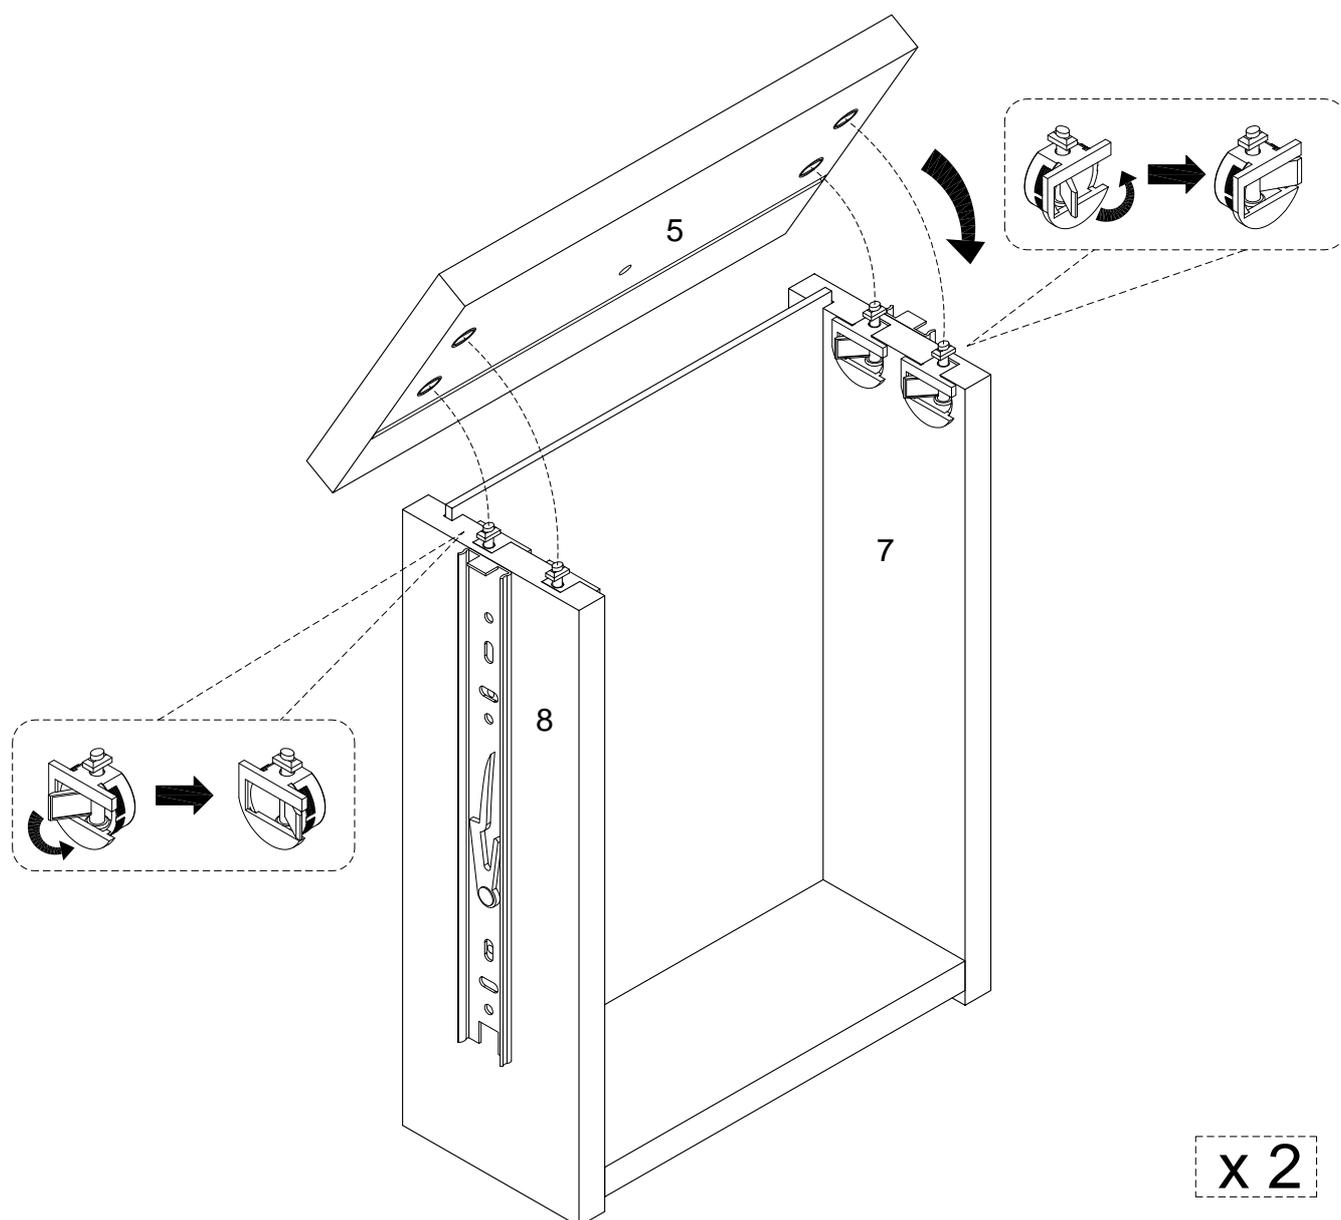

Step 10




Screw the Handle (J) in place using the (K) bolt. Repeat this for both drawers.

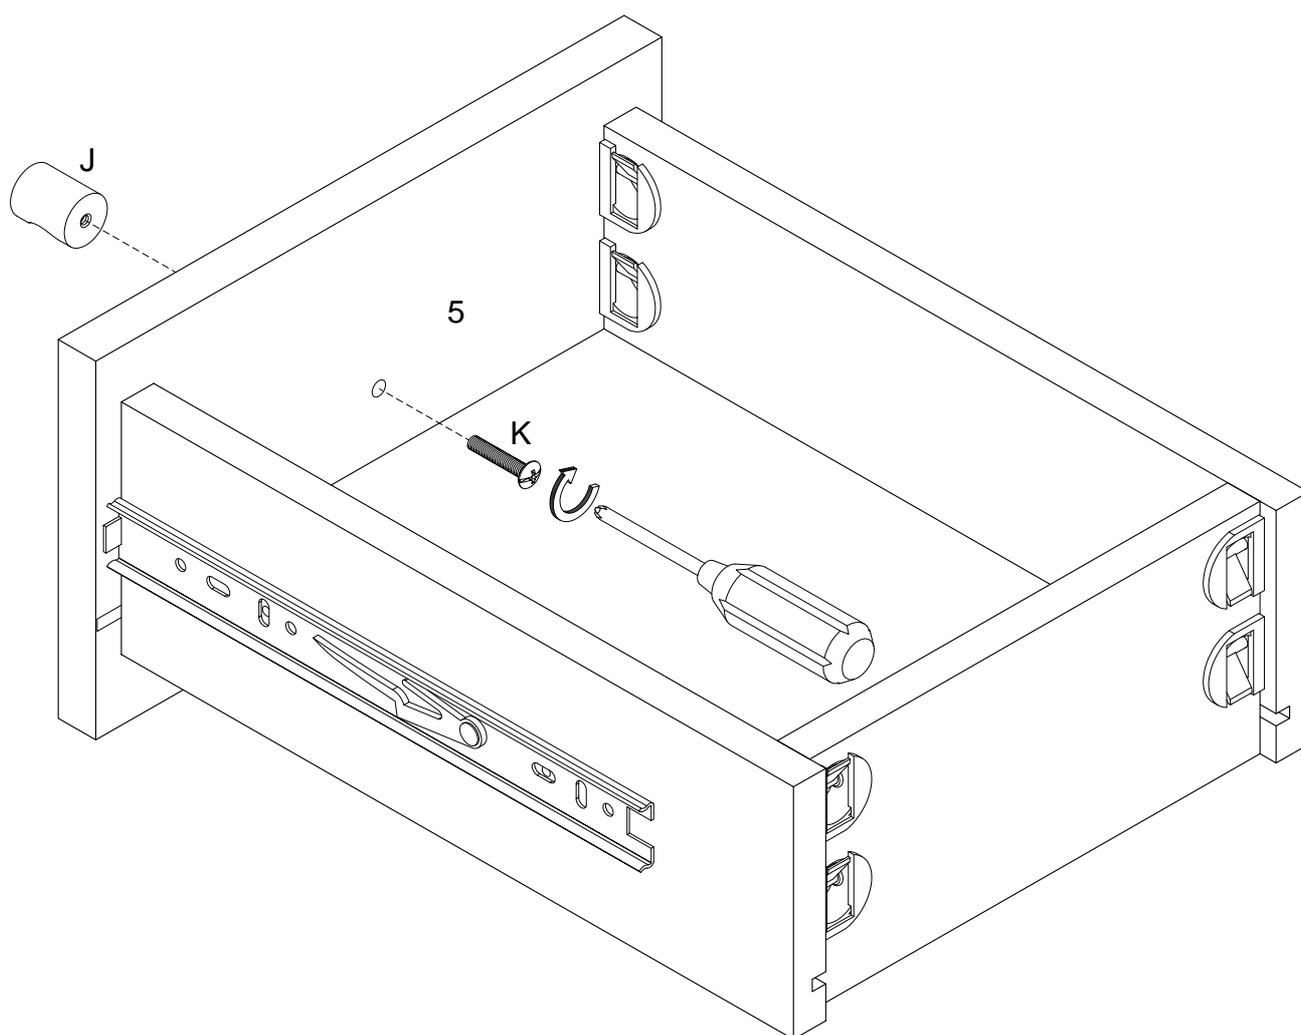

x 2

Step 11

Firmly push the drawers all the way into place making sure the drawer member lines up with the inside guides of the cabinet member. Some resistance is normal.

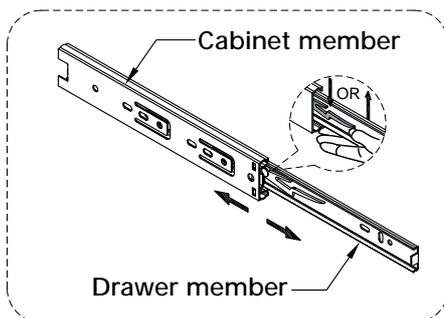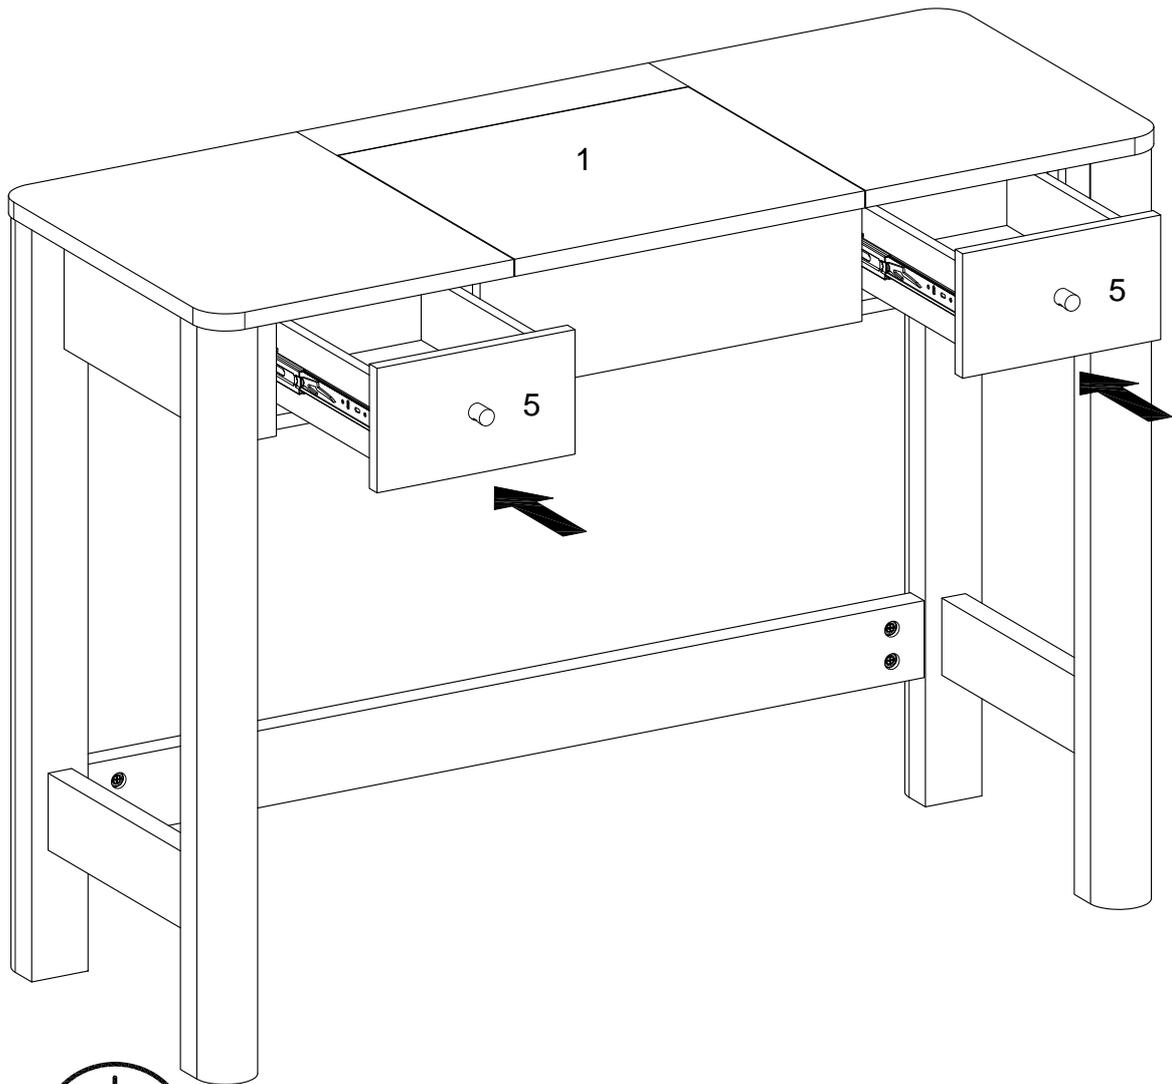


Reinserting your Cabinet Glides together

Line up the Drawer Member so it is inside the guides of the Cabinet Member. Once the connection is made, push the drawer into place entirely. It may not be a smooth glide on your first try, but will improve after it's fully inserted.


Step 12

Arrange the adjustable feet on the bottom of each leg to ensure a level surface.

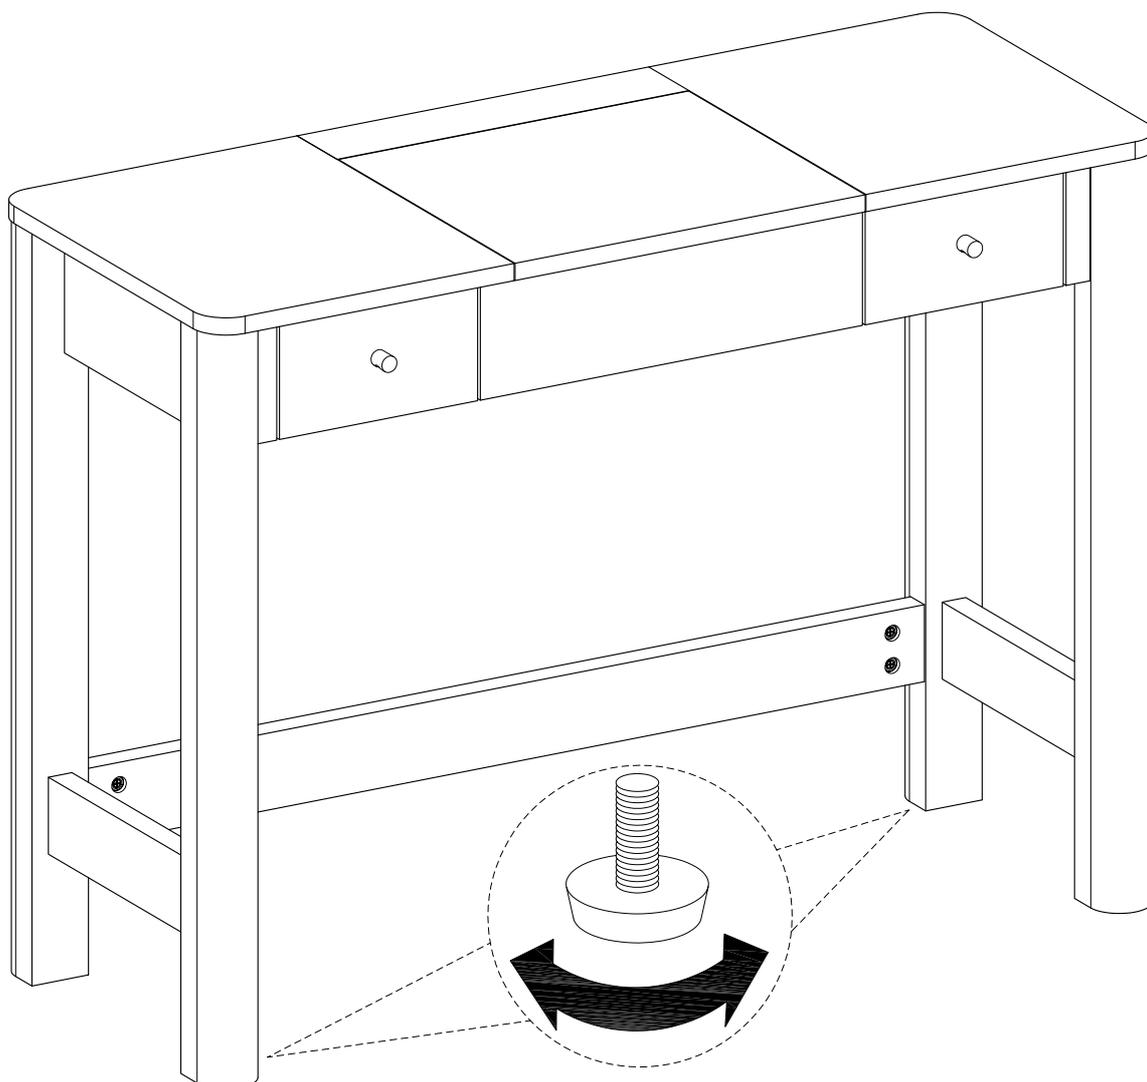


Step 13

Use the provided stickers (L) to cover each cam lock (C), ensuring a clean finish. Insert the Cable grommet (Q) into place.

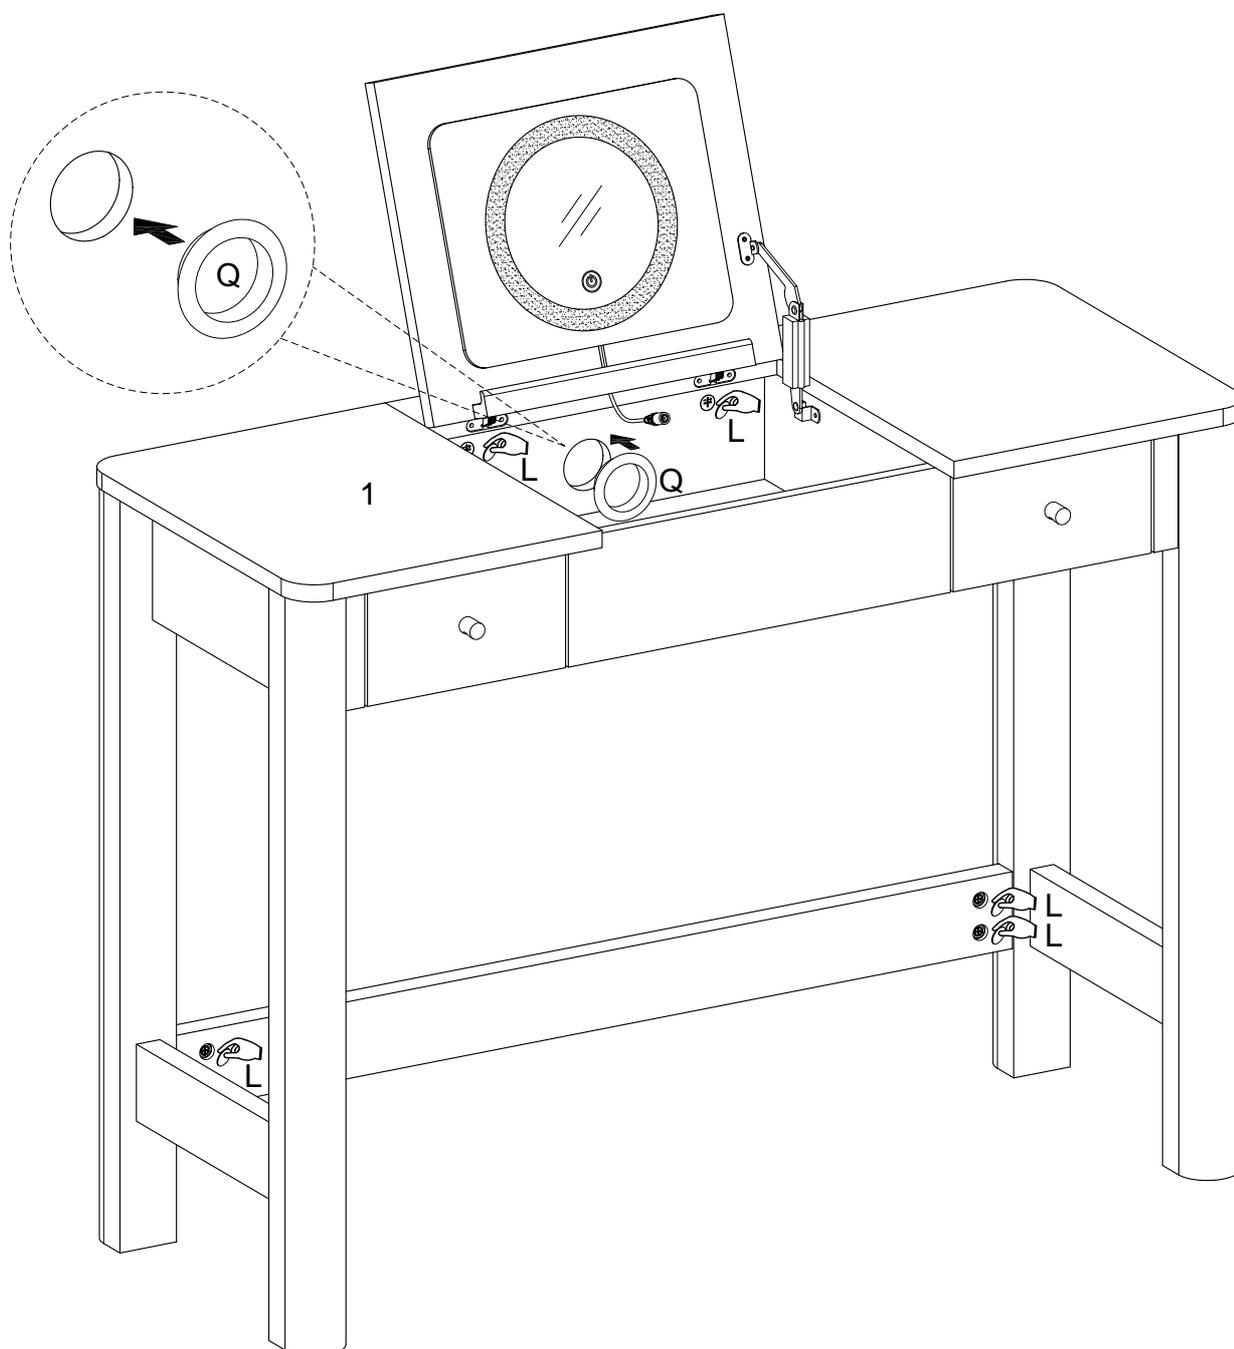


Step 14

Insert the USB power socket (M) into place and secure it with the (N) screws.

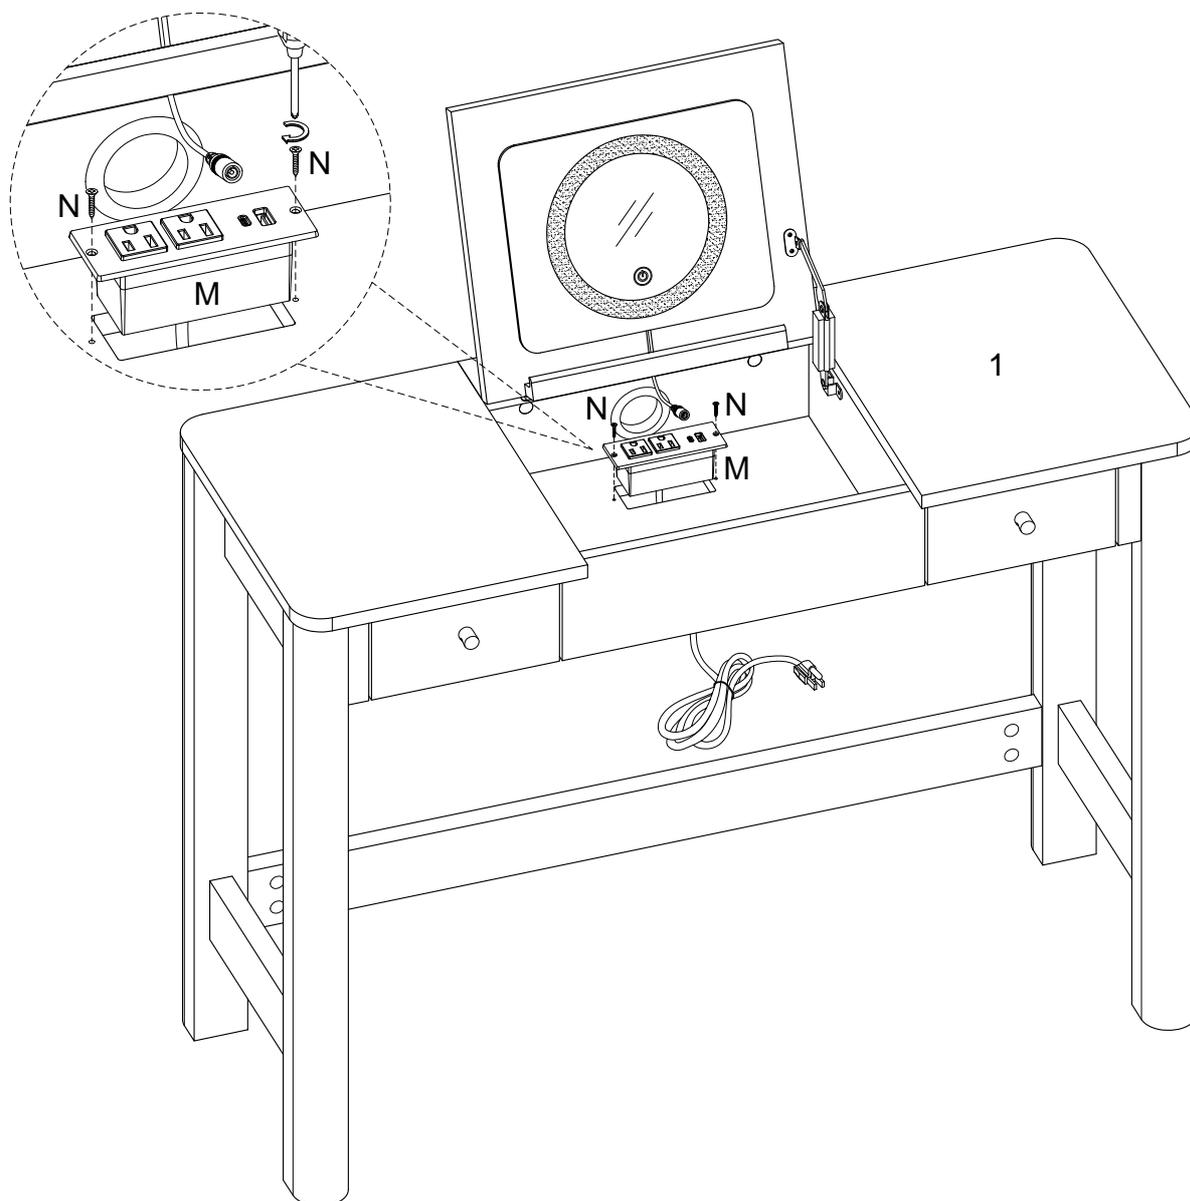








Step 15

Plug the large end of the power adapter (P) into the USB power socket (M) and plug the other end into the mirror.

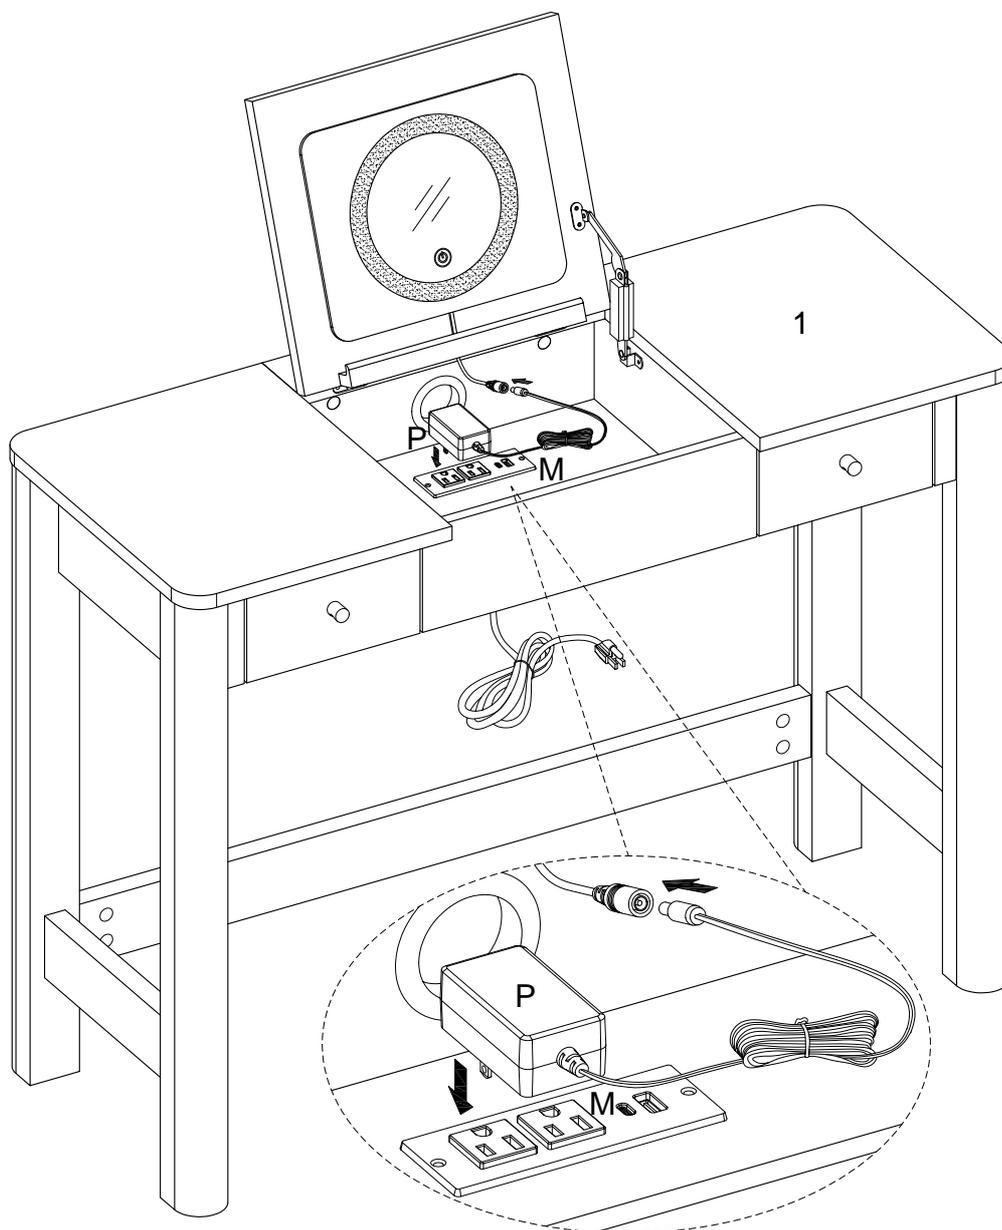


Step 16

Ensure your unit is plugged directly into the wall, bypassing any additional extension cords.

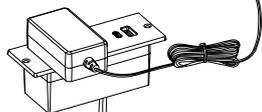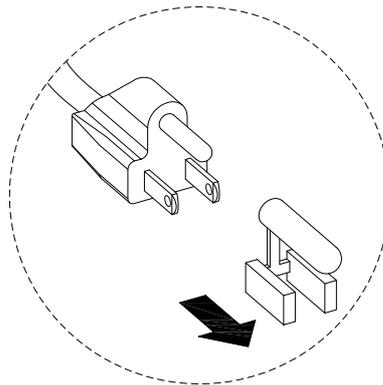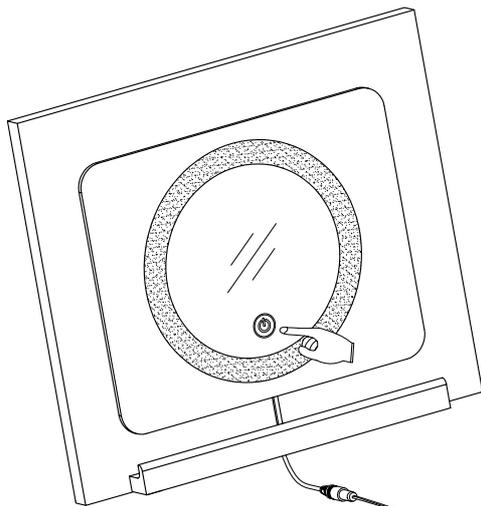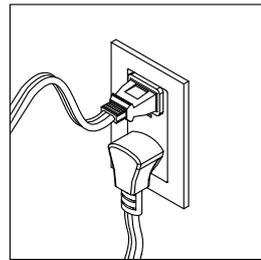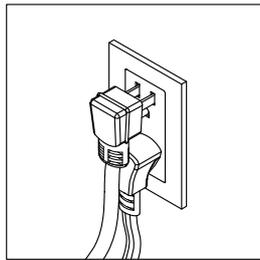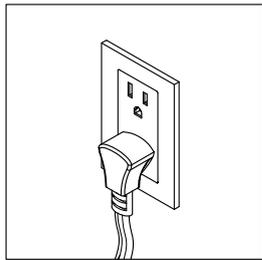

Final Assembly

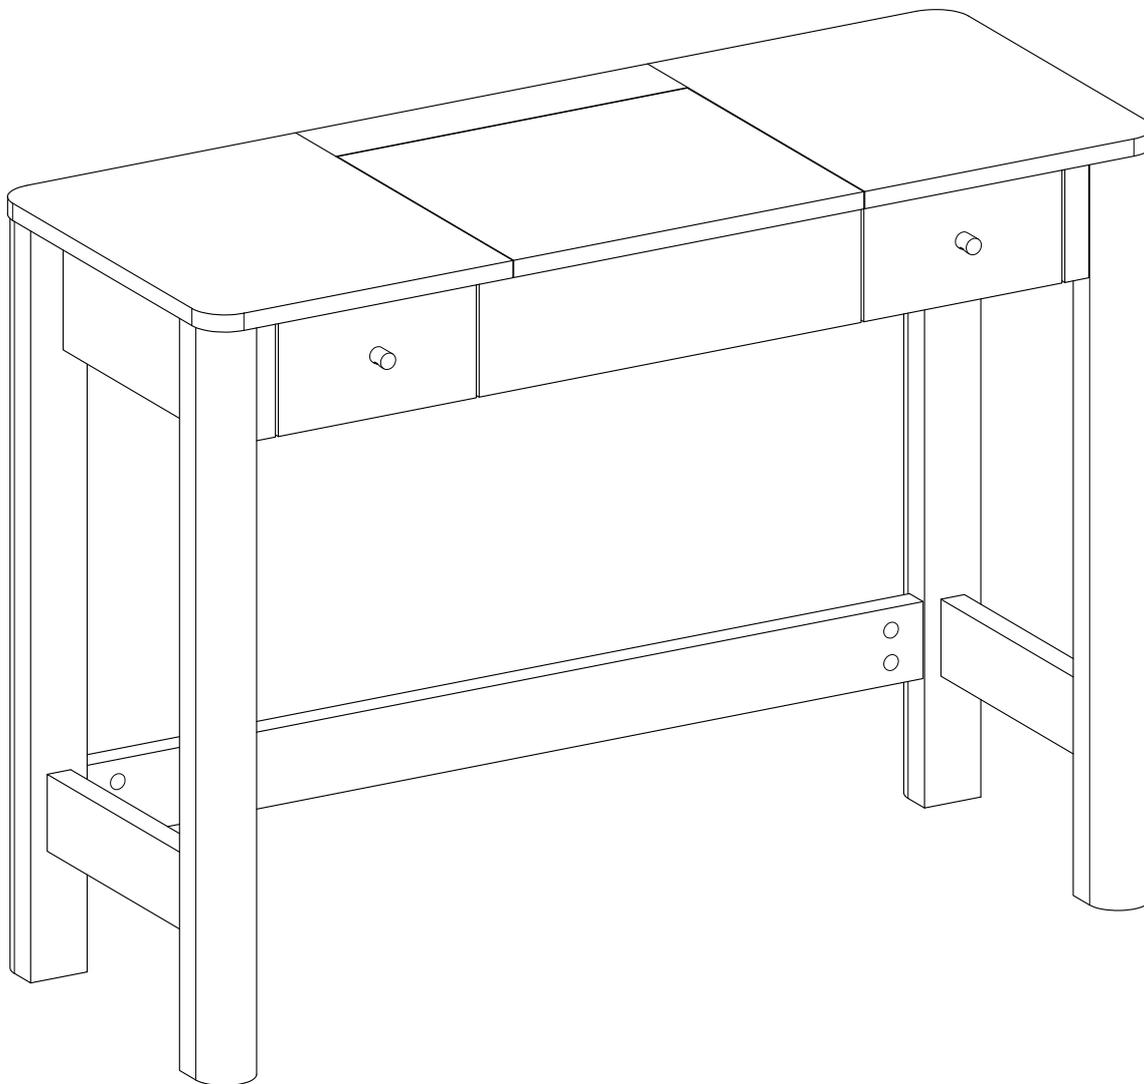

Congratulations on your new piece of furniture!

We would love to hear about it and see it.
Please leave us a review or post a picture with
#mywalkerredisonhome

Assembling furniture can be tricky sometimes.

Our customer service team, located in Utah, is here for product information, help assembling a product, or for any other customer support issue

Call us at **801-433-3008**

Email us at service@walkeredison.com

Visit our Customer Service website at
walkeredison.com/pages/customer-service

We are available to help Monday -Thursday 8am-5pm, Friday
8am-3pm MST

For details on Assembly Videos, Assembly Instructions,
Replacement Parts, and Customer service,
SCAN HERE

