


SAFAVIEH

L I G H T I N G

Assembly Instruction

CAUTION Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:LIT4408A

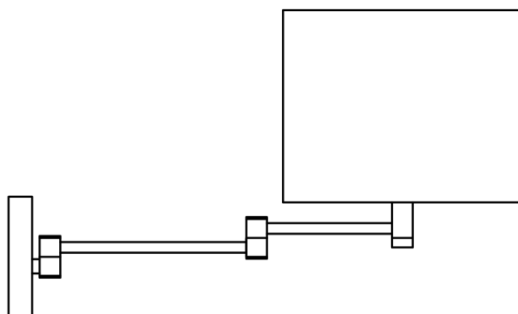

Care and Cleaning








To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use clean water, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting bar		1X	D	Shade		1X
A1	Mounting screw		2X	E	Socket Ring		1X
B	Lampbody		1X	F	Bracket screw		2X
C	Bulb		1X				

Installation


Step 1

Unpack all parts from cartons carefully
Installing the mounting bar(A) with screws(A1) to the outlet box

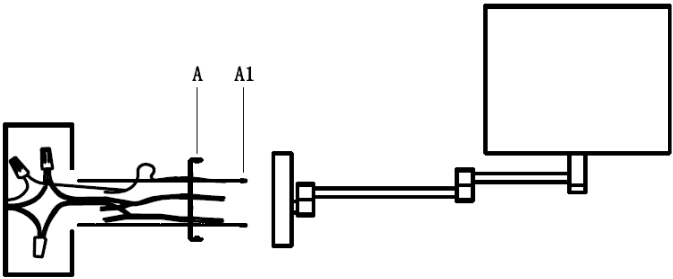


Step 2 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brown,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor




*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Step 3

Orient the wall canopy to tighten lampbody to the wall with bracket screw(F) by screwdriver.
Place the shade (D) on the lampholder, and secure it with socket ring (E)
Install bulbs (C). Be sure to use bulb with wattage no greater than specified on this fixture

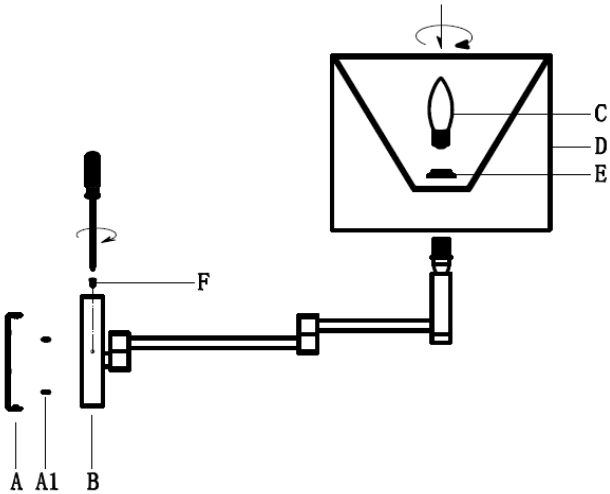

Step 4

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP