


SAFAVIEH LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:FLU4006A

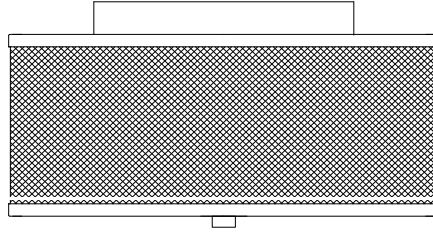

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Mounting Plate		1X	F	Ground Screw		1X
B	Wire Nut		3X	G	Diffuser		1X
C	Mounting Screw		2X	H	Finial		1X
D	Lamp Body		1X	I	Bulb		2X
E	Canopy Nut		2X				

Installation

Step 1

Unpack all parts from cartons carefully.

Separate the Mounting Plate(A) from the Canopy of the Lamp Body(D) by removing the Canopy Nut(E) anti-clockwise.

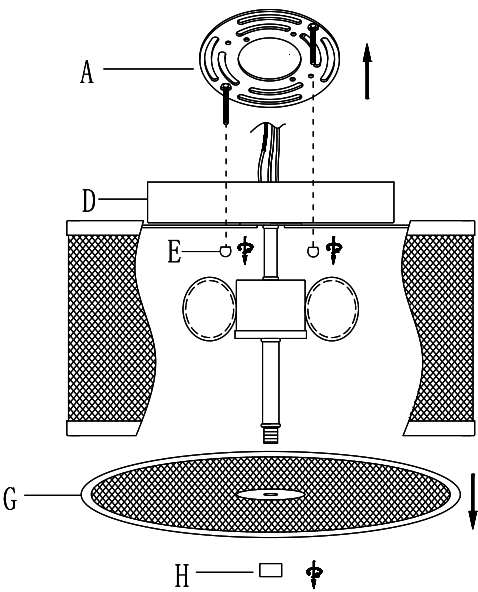


Step 2

Separate the Diffuser(G) from the Lamp Body(D) by removing the Finial(H) anti-clockwise.


Step 3

Insert the J-box wires through the opening of Mounting Plate (A). Attach the Mounting Plate (A) onto the J-box and secure it by turning the 2 Mounting Screws (C) clockwise until tight.

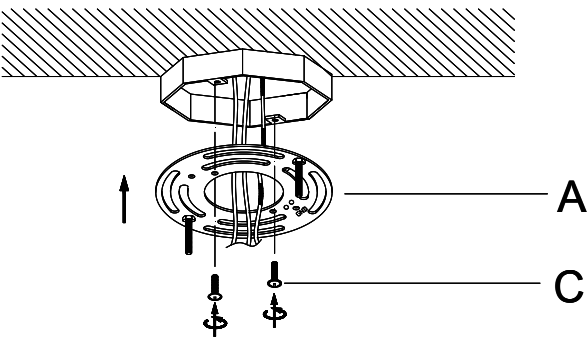


Step 4 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape as illustrated on left



Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(F) on mounting bracket, no less than 2" from wire end. Tighten ground screw(F). If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw(F).

Step 5

Attach the Canopy of the Lamp Body(D) to the Mounting Plate (A) and fix it by turning the Canopy Nut (E) clockwise.


Step 6

Insert the Bulbs (I) into the Sockets as diagram.

**PLEASE USE TYPE "A" BULB MAX 40-WATT
OR EDISON MAX 40-WATT OR CFL BULB
MAX 13-WATT OR LED MAX 9-WATT.
THERE ARE 2 X 4W LED BULBS IN THE BOX.**

Place the Diffuser(G) onto the threaded portion of the tube underneath the sockets as diagram.

Fix it in place by turning the Finial (H) clockwise till tight.

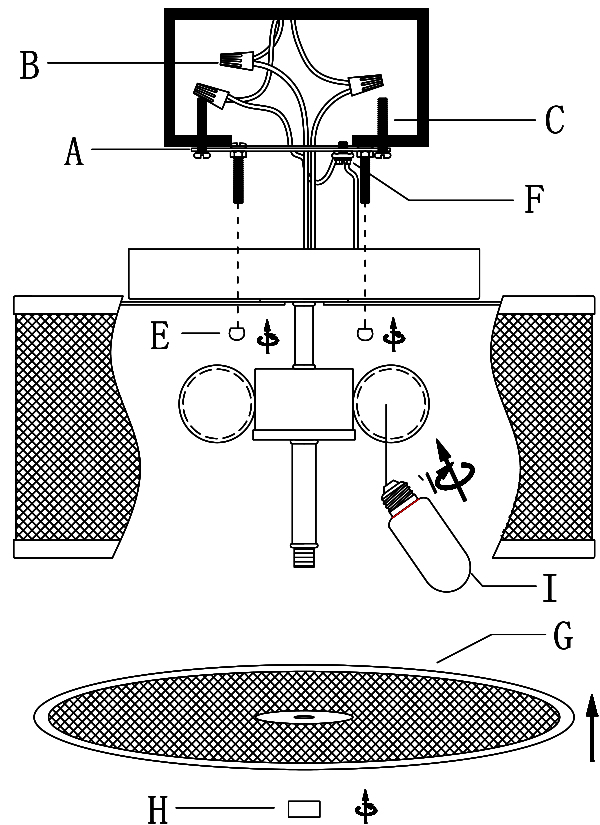

Step 7

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP