

WARNING (To reduce the risk of fire, electric shock, or personal injury):






- 1. We suggest installation by a **licensed electrician**.
- 2. Please read the instruction carefully and save it as you may need it at a later time.
- 3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
 - » Go to the main fuse, or circuit breaker, box in your home.
Place the main power switch in the “**OFF**” position.
 - » Place the wall switch in the “**OFF**” position.
- 4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
- 5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
- 6. Make sure the voltage you are using is **120V**. The maximum wattage is **Type A, Max 60W** per bulb.
- 7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
- 8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
- 9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:



**TOOLS REQUIRED
(NOT INCLUDED):**

Before starting assembly and installation please prepare the needed tools as below picture


				
Ladder	Philips Head or Flat Blade Screwdriver	Electrical Tape	Pliers	Wire Cutter/Stripper

PARTS TYPE & QTY INCLUDING:

- (C) Strain relief (10)
- (D) Cord (5)
- (F) Mounting plate (1)
- (G) Green ground screw (1)
- (I) Canopy (1)
- (J) Ball knob (2)
- (L) Socket (5)
- (M) Wire lampshade (5)
- (N) Glass shade (5)
- (O) Socket ring (5)

ACCESSORIES & QTY ENCLOSED:

- (A) Wood screw (4)
- (B) Plastic Wire Connector (3)
- (E) Anchor (4)
- (H) Mounting screw (2)
- (K) Allen wrench (1)
- (P) Spacer (1)

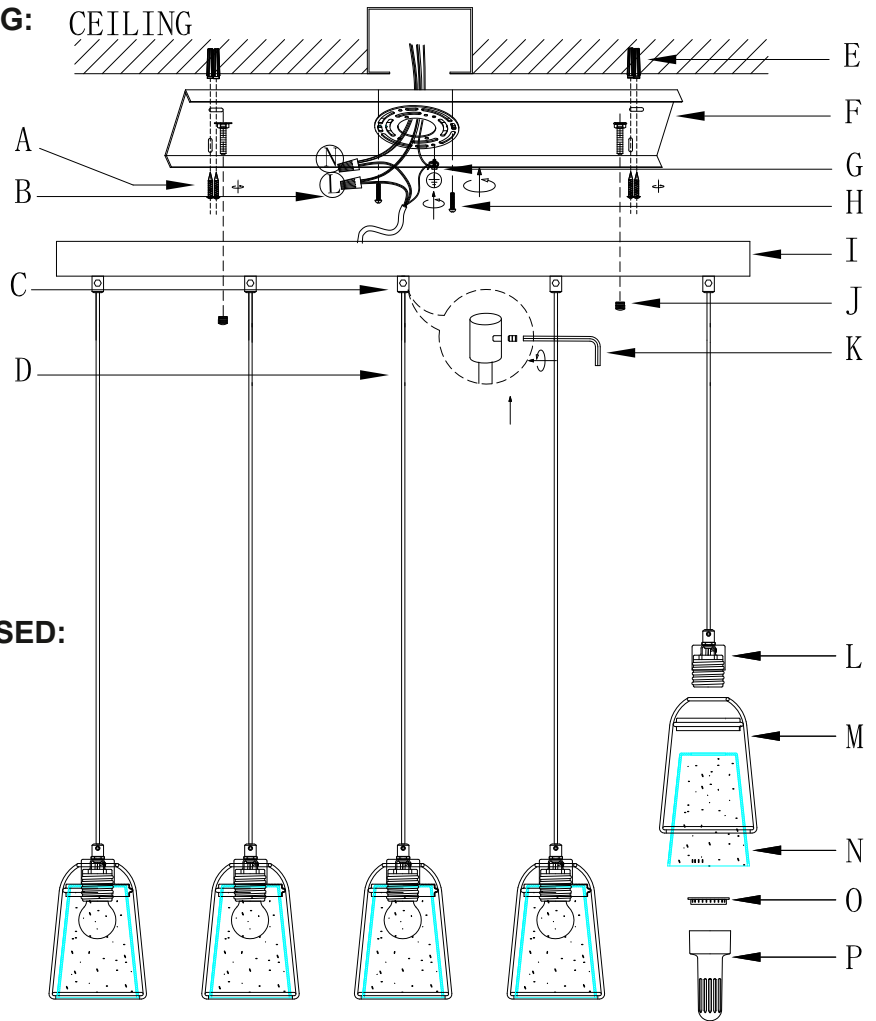

ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.


2. Turn off power

Before you start the installation, **NEVER** attempt any work without shutting off the electricity until the work is done.

- » Go to the main fuse, or circuit breaker, box in your home.
Place the main power switch in the “OFF” position.
- » Place the wall switch in the “OFF” position.


3. Make installation

A1 » Unscrew the ball knobs (J) from the canopy (I), then gently remove the mounting plate (F) from the canopy (I).

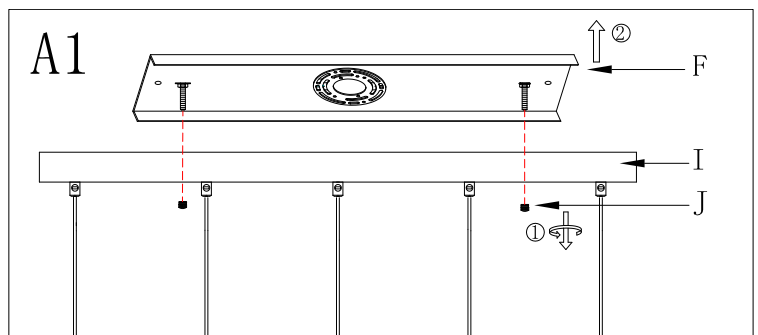

A2 » Adjust the length of the cords to achieve the desired height of the mounted fixture.


- 1) Use the allen wrench (K) to unscrew the screw in the strain relief (C), carefully pull cord (D) up or down to lengthen or shorten cord.
- 2) Once desired height of fixture is achieved, carefully tighten the screw

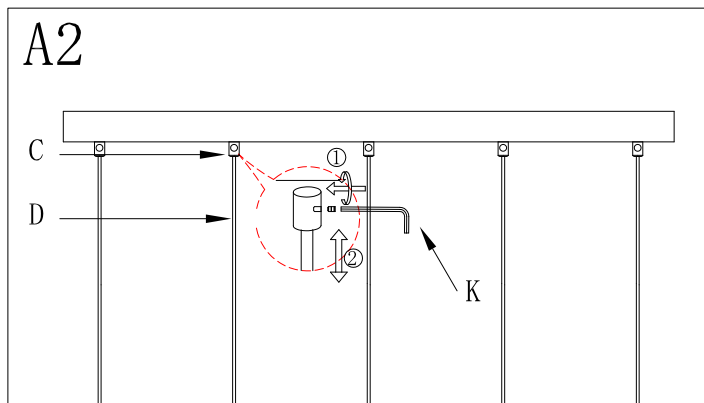

A3 » Carefully pass the supply wires from the outlet box through mounting plate (F).

NOTE: To drill the holes on the wall for anchors (E), attach mounting plate (F) to the outlet box with mounting screws (H) and mark the holes.


- Unscrew mounting screws (H) and remove mounting plate (F).
- Drill holes and gently knock anchors (E) into the holes until anchors (E) are level with the wall.
- Secure mounting plate (F) to the outlet box with mounting screws (H) and wood screws (A).

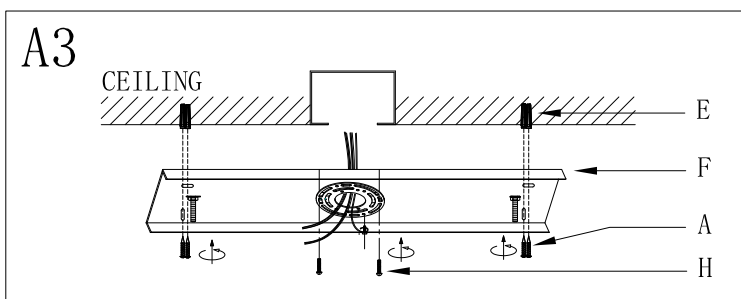

4 » Make wire connections

Connect wires as below wires connection shown. **REFER TO THE FOLLOWING CHARTS, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**

Connect ground wires according to the below chart

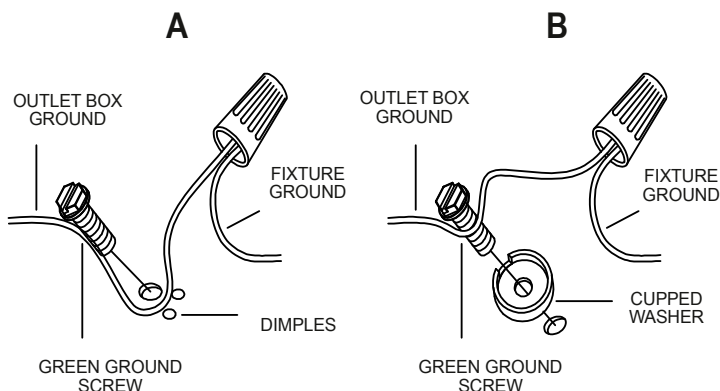


Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor


* Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

- Twist wires together with plastic wire connectors until tightly joined.
- Wrap each connector with approved electrical tape.
- Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.

A4 » Align the holes in the canopy (I) with the mounting screws, then attach the canopy (I) using the previously removed ball knobs (J). Hand tighten until snug.

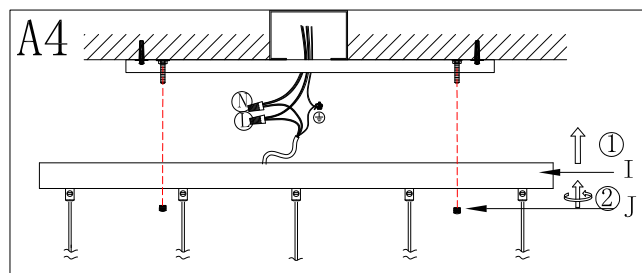

A5 » 1) Unscrew the socket ring (O) from the socket (L). Gently and carefully position glass (N) and wire lampshade onto the socket (L), then use the spacer (P) to thread the socket ring (O) till snug for securing the glass shade in place.
2) Install bulbs (Not included. Please do not exceed the maximum capacity recommended on the socket.)

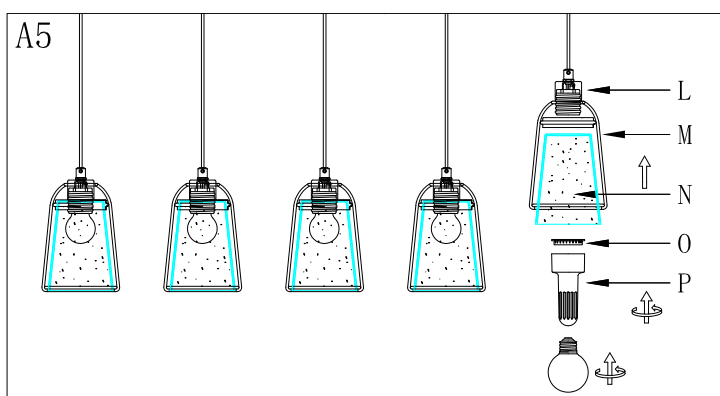

5. Check everything is already installed properly, then you could turn on the light. Enjoy!

ORDERING PARTS

Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

CLEANING

To clean, wipe the fixture with a soft cloth. Clean glass with a mild cleaner (such as mild and non-abrasive soap). Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.