





Assembly Instruction Sheet #S-1673P4
For Style 1673P4

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (1) 120V LED 50W DIMMABLE (2000)

Estimated Assembly Time: 15-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams later to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

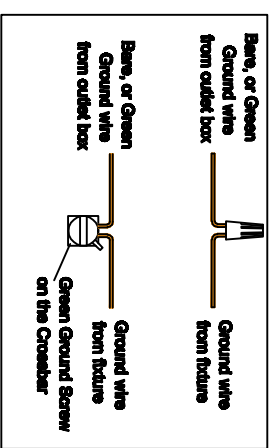
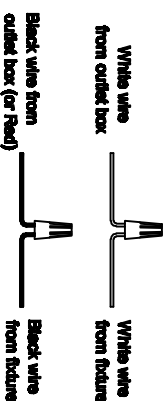
Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents	 A Fixture Body x1	STEP 1 - Release Mounting bracket from Ceiling Canopy .  Figure 1									
Hardware Contents	STEP 2 - Attach Mounting bracket to Outlet Box	 Figure 2									
<table><tr><th>PART</th><th>DESCRIPTION</th><th>QUANTITY</th></tr><tr><td>BB</td><td>Electrical Nuts</td><td>2pcs</td></tr><tr><td>CC</td><td>Screw</td><td>2pcs</td></tr></table> 	PART	DESCRIPTION	QUANTITY	BB	Electrical Nuts	2pcs	CC	Screw	2pcs		
PART	DESCRIPTION	QUANTITY									
BB	Electrical Nuts	2pcs									
CC	Screw	2pcs									

STEP 4 - Wire Connections

A. Use standard wire connections to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.



STEP 5 - Install Ceiling Canopy to Ceiling

