

EC1275/EC1277 ASSEMBLY INSTRUCTIONS

Components List

Item	Description	Quantity	Item	Description	Quantity
A	Wire Connector	3	F	Bulb (Not included)	3
B	Mounting Bracket	1	G	Glass	1
C	Canopy	1	H	Metal Trim Ring	1
D	Stem (6" & 12")	5	I	Barrel Screws	3
E	Fixture Body	1			

Hardware List


Item	Description	Quantity	Item	Description	Quantity
a	Mounting Screw	2			
b	Canopy Screws	2			

WARNING: TO AVOID THE RISK OF ELECTRICAL SHOCK, BE SURE TO TURN OFF MAIN POWER PRIOR TO INSTALLATION.

ASSEMBLY STEPS

1. Remove the fixture and components from the packaging .
2. Put Metal Trim Ring (H) onto the glass (G), and use Barrel Screws (I) to mount onto Fixture Body (E).
3. Install desired number of Stems (D) onto the Fixture Body (E) by threading each stem into the other. Attach Canopy and swivel onto the top stem after threading wire through the swivel. Rotate clockwise to tighten.
4. Install the Mounting Bracket (B) to ceiling junction box by using appropriately sized Mounting Screws (a) (not included).
5. Connect the Ground wire from the fixture and canopy to junction box, secure the electrical connections using the Wire Connector (A). Connect the NEUTRAL (OR WHITE) WIRE from the fixture to NEUTRAL WHITE WIRE from power supply with the Wire Connector (A). Connect the HOT (OR BLACK) WIRE from fixture to BLACK SUPPLY WIRE from power supply with the Wire Connector (A).
6. Lift Canopy (C) and complete fixture assembly up and onto the Mounting Bracket (B) and secure with Canopy Screws (b). Install desired light bulbs.

CAUTION - Refer to the wattage caution label located near the socket for maximum wattage rating-do not exceed maximum wattage listed.

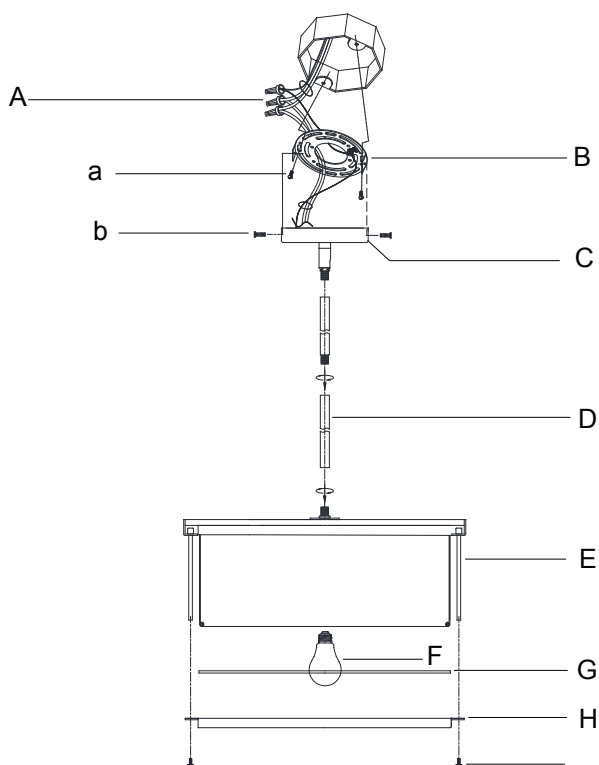

Note: (1). The above diagram illustrates the installation of your fixture. This is a representative drawing and is not intended to exactly match the style of your fixture.