


DIAGRAM OF INSTALLATION STRUCTURE


SKU No. :CE1013065 Product Size: Ø36 1/4"*H29 1/8" Light Source: $12 \times B10 E12 Bulb$

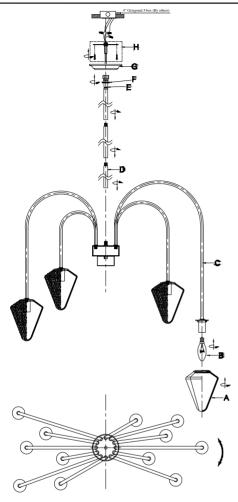

- A: Glass shades
- B: B10 E12 bulbs(Not Included)
- C: Frame
- D: 1x6"+2x12"+1x24" Rods
- E: Swivel
- F: Threaded ring
- G: Canopy
- H: Mounting hardware

Installation instruction

- 1. Turn off the power.
- 2. Carefully push fixture wires from top of frame (C) up through the rods (D). Screw rods (D) onto top of frame (C).
- 3. Determine desired hanging height of fixture. Select the quantity of rods(D) to achieve that height.
- 4. Carefully push fixture wires through remaining rods (D). Screw rods (D) together.
- 5. Fasten mounting hardware(H) to junction box with machine screws.
- 6. Slip threaded ring (F) down ,position the threaded ring (F) and canopy(G) over end of rod (D) and screw the swivel onto the top of rod(D).
- 7. Raise the fixture up to the ceiling and do the wire connection. Place the canopy(G) over the junction box and secure with threaded ring (F).
- 8. Screw recommended bulbs (E12 B10 bulb type, not included) into sockets.
- 9. Install the glass shades.
- 10. Rotate arms until arms are evenly spaced apart.
- 11. After finish the installation, turn on the power.

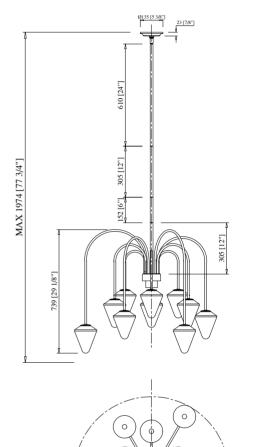

Ø921 [Ø36 1/4"]